

**Shootaring Canyon Uranium Processing Facility**  
**Environmental Report**

**Source Materials License No. UT0900480**  
**January 2006**



**Plateau Resources, Ltd.**  
**877 North 8<sup>th</sup> West**  
**Riverton, WY 82501**

**Environmental Report  
For  
Shootaring Canyon Uranium Processing Facility**

**Plateau Resources, Ltd.  
877 North 8<sup>th</sup> West  
Riverton, WY 82501**

**Environmental Restoration Group, Inc.  
8809 Washington NE, Ste. 150  
Albuquerque, NM 87113**

Environmental Report  
Table of Contents

1. Introduction .....	1-1
2. Proposed Processing Activities .....	2-1
3. Mill Process and Equipment .....	3-1
3.1 Mill Process .....	3-1
3.1.1 Ore Handling and Preparation .....	3-4
3.1.2 Ore Grinding .....	3-5
3.1.3 Leaching .....	3-5
3.1.4 Countercurrent Decantation Thickening .....	3-6
3.1.5 Solvent Extraction Feed .....	3-6
3.1.6 Solvent Extraction .....	3-6
3.1.7 Precipitation .....	3-7
3.1.8 Drying and Packaging .....	3-7
3.1.9 Vanadium Extraction Circuit .....	3-7
3.2 Sources of Plant Wastes, Control Equipment and Instrumentation .....	3-9
3.2.1 Ore Stockpiles and Crushing .....	3-10
3.2.2 Ore Handling .....	3-10
3.2.3 Leaching .....	3-12
3.2.4 Countercurrent Decantation Thickening Effluents .....	3-12
3.2.5 Solvent Extraction .....	3-13
3.2.6 Precipitation .....	3-14
3.2.7 Precipitation, Drying, and Packaging .....	3-14
3.3 Controls of Plant Wastes and Effluents .....	3-15
4. Operations .....	4-1
4.1 Corporate Organization and Administrative Procedures .....	4-1
4.2 Personal Qualifications and Training .....	4-1
4.3 Security .....	4-2
4.5 Radiation Safety .....	4-2
5. Environmental Characteristics of Mill Site .....	5-1
5.1 Demography .....	5-1
5.2 Meteorology .....	5-3
5.2.1 Wind and Atmospheric Stability .....	5-4
5.2.2 Precipitation .....	5-13
5.2.3 Severe Weather Events .....	5-14
5.3 Hydrology .....	5-16
6. Radiological and Other Environmental Impacts from Proposed Action .....	6-1
6.1 Off-Site Radiological Releases and Dose Assessment from Normal Operations .....	6-1
6.1.1 MILDOS-AREA Input Parameters .....	6-2
6.1.2 Assumptions and Uncertainty Analysis .....	6-7
6.1.3 MILDOS Model Results .....	6-8

6.2	Environmental Effects of Accidents.....	6-9
6.2.1	Trivial Incidents Involving Radioactivity .....	6-10
6.2.2	Small Release Involving Radioactivity .....	6-10
6.2.3	Large Release Involving Radioactivity .....	6-12
6.2.4	Transportation Accidents .....	6-12
6.2.5	Releases of Hazardous Chemicals .....	6-13
7.	Evaluation of Alternatives .....	7-1
7.1	Unavoidable Adverse Environmental Impacts.....	7-1
7.2	Irreversible and Irretrievable Commitments of Resources .....	7-2
7.3	Relationship between Local and Short-Term Uses of the Environment and the Maintenance of Long-Term Productivity .....	7-2
7.4	Socioeconomic Impacts.....	7-2
7.5	Cost-Benefit Balance of Environmental Action and Alternatives .....	7-3
8.	References.....	8-1

### List of Figures

Figure 1.0-1:	Geographical Location of Shootaring Canyon Mill .....	1-2
Figure 3.0-1:	Architectural Arrangement of Shootaring Ore Processing Facilities..	3-2
Figure 3.1-1:	Flow Diagram for Process of Ore to Tailings and Product.....	3-3
Figure 5.2-1:	Shootaring Canyon Wind Rose .....	5-5

### List of Tables

Table 3.1-1:	Reagents used in the Milling Process.....	3-4
Table 3.2-1:	Plant Stack Emissions .....	3-11
Table 3.2-2:	Tailings Slurry Constituents.....	3-12
Table 5.1-1:	2004 Area Population for Wayne, Garfield, San Juan, and Kane Counties and the State of Utah .....	5-1
Table 5.1-2:	Population Distribution within an 80 Kilometer Radius of the Shootaring Mill Site .....	5-3
Table 5.2-1:	Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class.....	5-6
Table 5.2-1:	Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued).....	5-7
Table 5.2-1:	Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued).....	5-8
Table 5.2-1:	Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued).....	5-9
Table 5.2-1:	Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued).....	5-10

Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (concluded) .....	5-11
Table 5.2-2: Wind Speed and Direction Data Recovery .....	5-11
Table 5.2-3: Annual Relative Frequency Distribution of Atmospheric Stability at Shootaring Canyon.....	5-12
Table 5.2-4: Meteorological Parameter Summary for Shootaring Canyon, October 1979 through September 1980 .....	5-12
Table 5.2-5: Wind Statistical Summary January 1 to December 31, 1983 .....	5-13
Table 5.2-6: Annual Precipitation at Selected Regional Weather Stations in Vicinity of the Processing Facility .....	5-14
Table 5.2-7: Monthly Precipitation at the Processing Facility, 1980-1982 .....	5-14
Table 5.2-8: Total Monthly Precipitation Recorded for the Site and at Selection Regional Stations, 1980.....	5-16
Table 5.2-9: Estimated Maximum Point Precipitation for Selected Durations and Recurrence Intervals.....	5-16
Table 6.1-1: MILDOS Model Parameters for Radiological Assessment .....	6-3
Table 6.1-1: MILDOS Model Parameters for Radiological Assessment(continued)	6-4
Table 6.1-1: MILDOS Model Parameters for Radiological Assessment(concluded)	6-5
Table 6.1-2: MILDOS Model Total Effective Dose Equivalent Results.....	6-9

## Appendixes

### Appendix A: MILDOS Model Output Results

# 1. Introduction

The Shootaring Canyon Uranium Processing Facility (mill) is located in Garfield County in Southeastern Utah. It is about 21 km (13 miles) north of Bullfrog Basin Marina and 77 km (48 miles) south of Hanksville as shown in Figure 1.0-1. A small town, Ticaboo, is located 5.6 km (2.6 miles) south of the site. It is owned by Plateau Resources, Limited.


Plateau began start-up testing of the uranium processing facility on April 13, 1982, and continued this testing through May. The plant capacity and metallurgical performance were as expected. Plateau started commercial operations on June 1, 1982, but, due to the continued decline in the market for yellowcake, suspended operations at the facility on August 18, 1982. During the limited time the facility was in operation, 27,825 pounds of  $U_3O_8$  or yellowcake were produced and sold.

The facility was placed on a standby basis. Cleanup operations were completed and the solids were removed from all circuits except the calciner and product thickener. The doors to the calciner room were welded shut and doors to the 600 area were locked. Plans for decommissioning were prepared and approved by the NRC. Recently, some of the process components were sold in anticipation of decommissioning. One employee is currently employed at the facility to maintain equipment and conduct environmental and radiological monitoring. A Radiation Safety Officer (RSO) is also present on an as-needed basis.

A recent market analysis by Plateau Resources indicates that a favorable uranium market is anticipated. Plateau is planning to resume operations as soon as approval of the Renewal License Application is obtained from the Division of Radiation Control, Utah Department of Environmental Quality and the mill and associated equipment and facilities are fully restored and functional.

Plateau is requesting permission to resume operations of the Shootaring Canyon Uranium Mill facility. This environmental report supports the application to amend Source Materials License No. UT 0900480 to allow the resumption of milling. Under the State of Utah's regulatory authority, source materials licensees are required to submit environmental reports (ER) for each new application, renewal, or major amendment describing the proposed action, a statement of its purposes, and the environment affected. The requirements are specified in Utah Administrative Code, Rule R-313-24 and 10 CFR Part 51, Section 51.60. For license amendments or renewals, the NRC encourages licensees to provide a supplement to an ER and include by reference previously submitted information.

Figure 1.0-1: Geographical Location of Shooting Canyon Mill

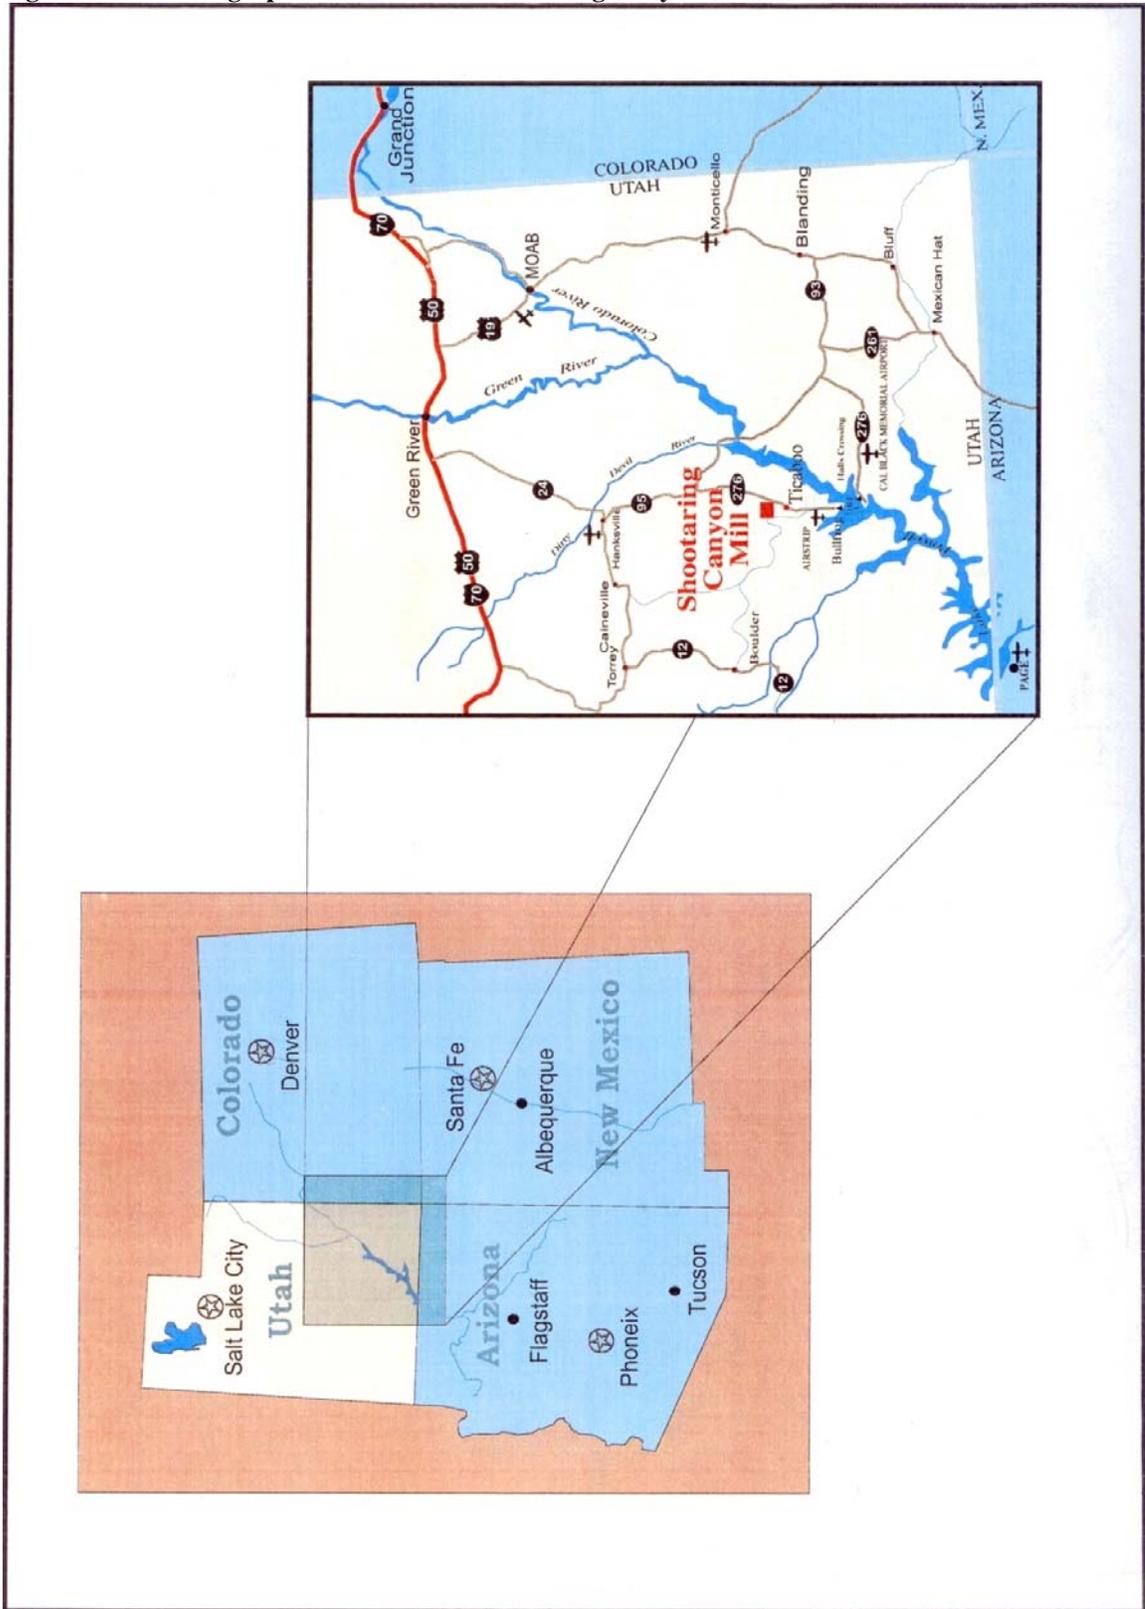

Rule R-313 requires that the ER present a discussion of a) an assessment of the radiological and nonradiological impacts to the public health from licensed activities, b) an assessment of any impact on waterways and groundwater resulting from licensed activities, c) consideration of alternatives to the licensed activities, d) consideration of the long-term impacts including decommissioning, decontamination, and reclamation impacts associated with licensed activities.

Several environmental reports have been prepared over the years to support activities at the site (Woodward-Clyde, 1978; NRC, 1979; Plateau, 1997). This environmental report uses some of the information included in prior reports.

## 2. Proposed Processing Activities

The processing facility is designed to process approximately 1000 tons of ore per day. The ore grade is estimated to average approximately 0.25 percent uranium oxide ( $U_3O_8$ ). The plant is expected to have an overall recovery rate of approximately 94 percent. Based on this anticipated recovery, an average processing rate of 1000 tons per day of ore, and an average ore grade of 0.25 percent, the plant is capable of producing up to approximately 1,720,000 pounds of yellow cake in a calendar year. A vanadium extraction circuit will be added to the processing facility designed to produce ammonium metavanadate and 99.5 and/or 99.9 percent vanadium oxide ( $V_2O_5$ ).

The ore to be processed is principally sandstone obtained from various mines in the region. The ore will be ground to sand-size particles. The uranium minerals will be leached from the ore by a conventional acid leach process. Soluble uranium is recovered with the decanted liquid in countercurrent decantation (CCD) tanks. Solids are discharged from the CCD system as waste material to the tailings facility located in a natural basin enclosed by a dam. The decanted, acidic liquid is pumped to leaching tanks, processed and passed to a solvent extraction (SX) system. Ammonia is added to the solution to precipitate the uranium as yellowcake. The yellowcake is then dried, packaged, and shipped offsite to a uranium hexafluoride conversion plant for the next phase of the fuel manufacturing process.

The depleted aqueous solution from uranium solvent extraction will serve as the feed for vanadium concentration. Anhydrous ammonia and sodium chlorate are added for pH adjustment and to oxidize tetravalent vanadium to the pentavalent state, respectively. Solids are removed and the clarified solution is conveyed to an SX system, in which vanadium is concentrated and purified. The solution will be treated in heated, sodium hexavanadate, precipitation tanks to which sulfuric acid and sodium chlorate will be added. The red cake will be further processed with sodium carbonate and sodium chlorate. The clarified solution will be combined with ammonium sulfate solution and ammonium hydroxide. After several mechanical processes, the ammonium hexavanadate cake will be packaged as is or further processed into 99.5 or 99.9 percent  $V_2O_5$ .

Solids and filtrates from the vanadium extraction circuit containing low concentrations of uranium and vanadium will be delivered to the tailings facility.

Processed ore, or tailings, is the major waste generated. Disposal of the tailings is by permanent storage in a lined cell that utilizes a natural depression, or basin, located adjacent to the plant site. The tailings liquid is separated prior to tailings placement and placed in a process water storage/evaporation pond. The process water will be recycled back to the mill circuit, used for dust control in the tailings facility, and evaporated. The plant and its support facilities also produce lesser quantities of other liquid and solid wastes and effluents which are recycled in the various process operations, discharged

with the tailings and liquids, or discharged to a septic system and sanitary waste leach field. Gaseous wastes and filtered dust released by the plant are discharged from eight stacks. Three of the stacks are exhaust stacks from diesel powered generators used to produce electricity.

### **3. Mill Process and Equipment**

This section presents a description of the Shootaring Canyon Uranium Processing Facility, the facility effluents, and their controls.

The general arrangement of the ore processing facilities is shown in the original architectural plan of the plant (Figure 3.0-1).

Arrangement of the various ore handling and processing systems was based on economy in construction and efficiency in operation. All process units except the countercurrent decantation tanks and the clarifier are housed or covered. The plant support buildings and facilities, such as an office, maintenance and warehouse building, laboratory, power house, and storage tanks, are located around the perimeter of the process units to yield a compact, well-integrated complex. The building exteriors are colored in earth-tone shades to blend with the high cliff to the west, as seen from State Highway 276. A short stretch of that highway, about 2 miles northeast of the site, provides the only convenient public view of the plant (except from the air). From the highway, the only signs of activity at the plant are vehicular movements.

The stacks, one rising about 100 ft and several others about 80 to 90 ft above plant grade, do not appear in silhouette from the highway. The largest building in the complex is about 140 ft by 180 ft in plan dimensions, and about 60 ft high. Other smaller structures, associated with the ore handling, preparation and conveying systems, have maximum heights of 60 to 70 ft above the general level of the plant site.

#### **3.1 Mill Process**

##### **General Summary**

The processing facility is designed to process approximately 1,000 tons of ore per day. The average ore grade is estimated to be 0.25 percent uranium oxide ( $U_3O_8$ ). The plant is expected to have an overall recovery rate of approximately 94 percent. Based on this anticipated recovery, the average processing rate of 1,000 tons per day of ore, and an average ore grade of 0.25 percent, the plant is capable of producing up to approximately 1,720,000 pounds of product in a calendar year.

A series of operations will be required to extract uranium from the ore. The ore to be processed is principally sandstone. The uranium minerals are present in the ore as coatings on sand grains; they also fill intergranular spaces. The uranium minerals are soluble in strong sulfuric acid solutions and will leach from the ore by a conventional acid leach process. Figure 3.1-1 presents a simplified process flow diagram for the plant, illustrating the pathway of ore to tailings and product. Table 3.1-1 lists reagents used in the process.

Figure 3.0-1: Architectural Arrangement of Shooting Ore Processing Facilities


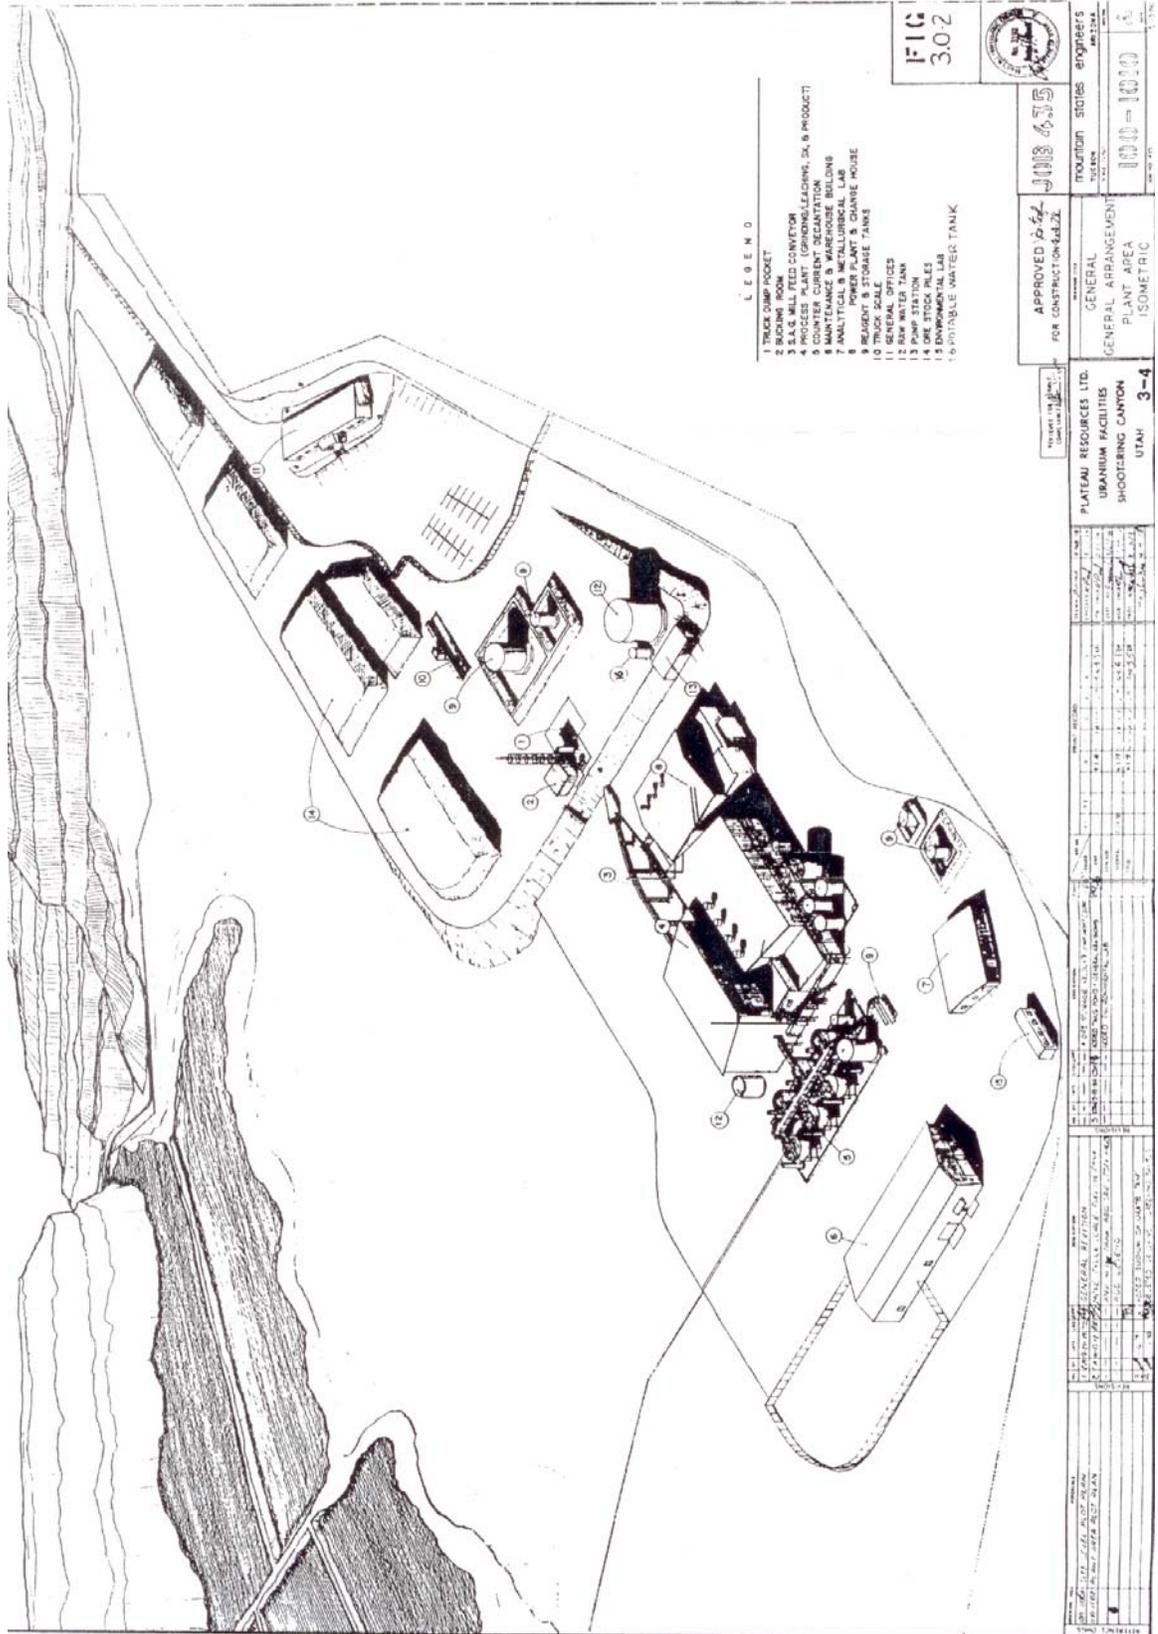


Figure 3.1-1: Flow Diagram for Process of Ore to Tailings and Product

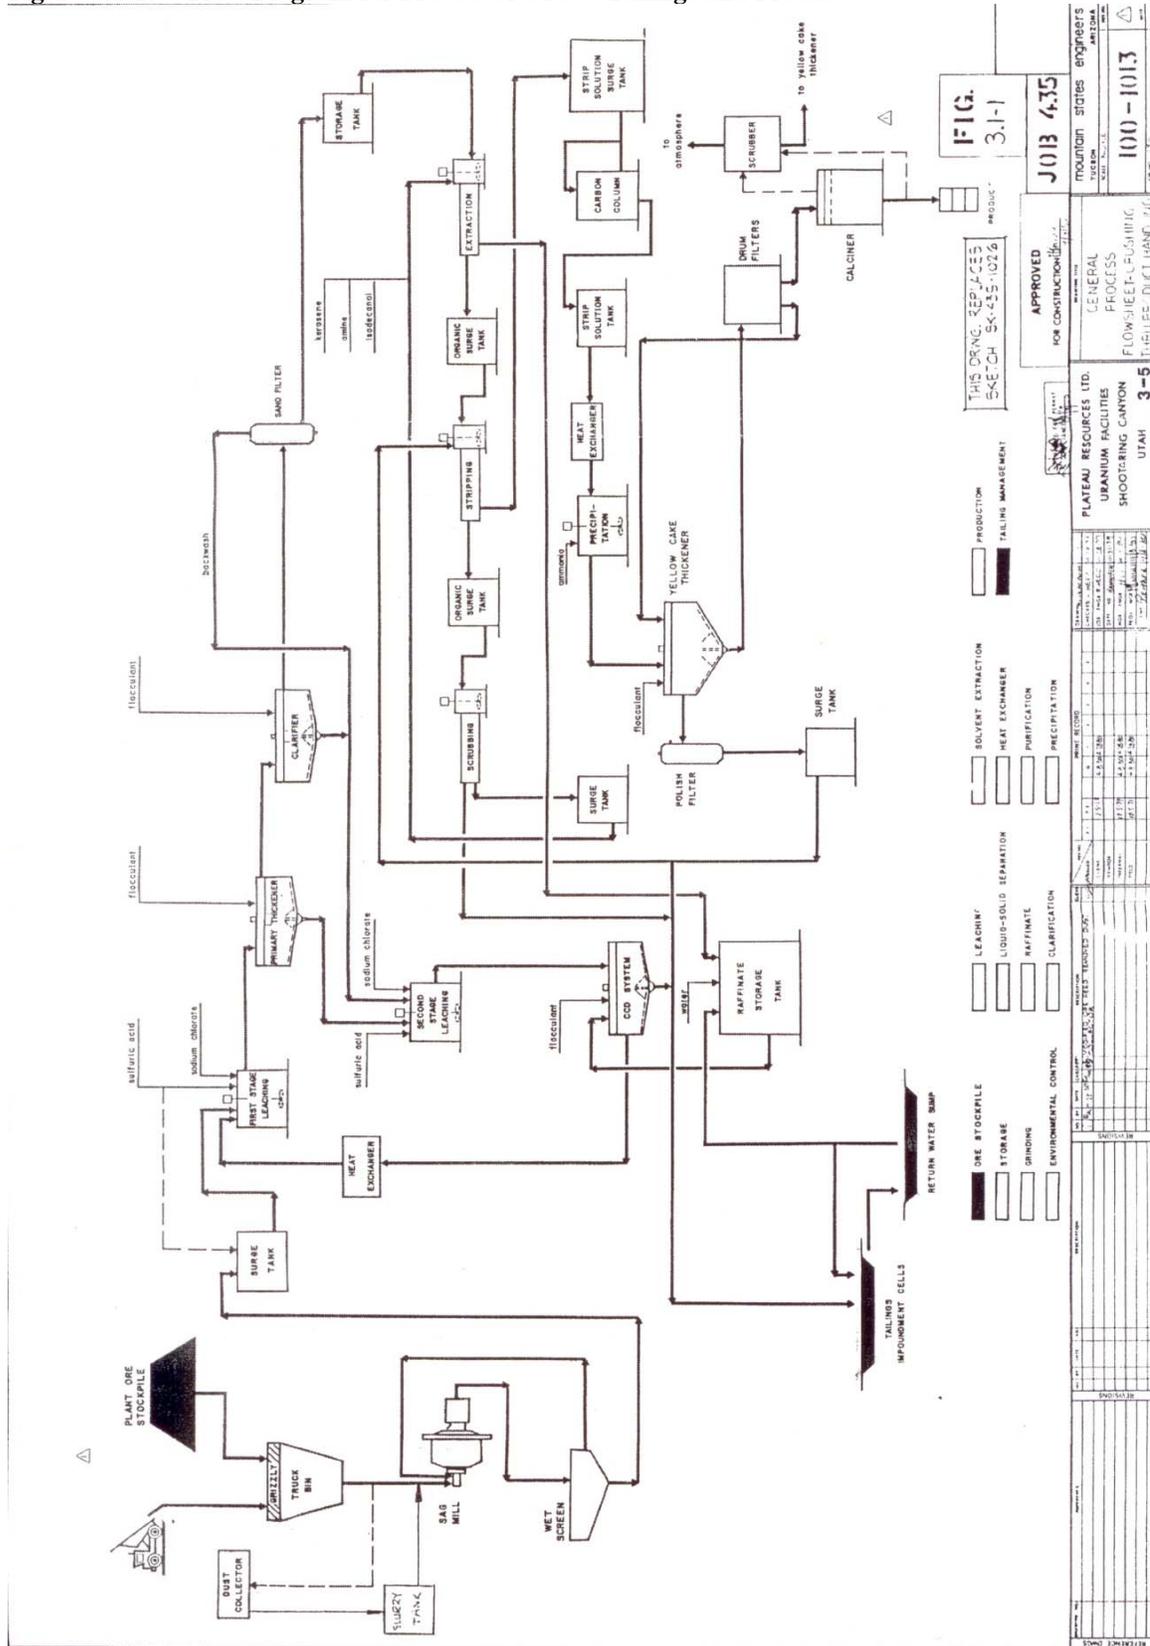

**Table 3.1-1: Reagents used in the Milling Process**

<b>Reagents</b>	<b>Process</b>
Sulfuric Acid	Leach
Sodium chlorate	Leach
Flocculant	Leach, CCD, Precipitation
Ammonia	SX, Precipitation
Tridecanol, Tertiary Amine, Kerosene	SX
Sodium bicarbonate	SX
Sodium hydroxide	Precipitation
Charcoal (carbon)	Precipitation

Notes:

CCD = countercurrent decantation

SX = solvent extraction

The ore is first ground to sand-size particles. This allows the acid to contact the grain surfaces during the leaching process. After grinding, the ore is delivered in slurry form directly to a two-stage, multiple-tank leaching system.

After leaching, the slurry is pumped to six countercurrent decantation (CCD) tanks where most of the soluble uranium is recovered with the decanted liquid. The CCD tanks are operated in series; solids pass through the tanks in one direction and the acid wash solution in the opposite direction. The solids are discharged from the CCD system as waste material to the tailings facility. The decanted, acidic liquid is pumped to the first-stage leaching tanks.

A thickener between the two leaching stages separates the uranium-bearing solution from the solids. The overflow liquid from the thickener passes through a clarifier and sand filters that remove suspended solids.

The separated solids from these two processes return to the leaching system. The filtered liquid is transferred to a solvent extraction (SX) liquid ion exchange system.

The uranium-bearing liquor passes through a series of stages in the SX system in which the uranium is transferred from the aqueous phase to an organic phase and then is stripped from the solvent by an ammonium sulfate solution. The ammonia is added to the stripped solution to precipitate the uranium as yellowcake. Finally, the yellowcake is dried, packaged, and shipped off site to a uranium hexafluoride conversion plant.

### **3.1.1 Ore Handling and Preparation**

Ore is hauled by truck to the processing facility from various mines in the region. The incoming ore is weighed on scales as it sits in the trucks. The net weight of the ore is calculated after the truck is emptied and re-weighed. Samples are collected at random from each load and analyzed on site for moisture and uranium/vanadium content. The ore is then deposited on various stockpiles and/or blended or dumped directly into the ore

hopper through a 14-inch grizzly. An electronically-controlled spray system is used at the dump pocket to control dust.

An electronically-controlled speed apron feeder, fixed under the truck hopper, discharges the ore onto the conveyor belt. The belt transports the ore up and out of the dump pocket and into grinding, the first stage of the process area.

All dust-generating points in the dump pocket are connected by a ducting system to a cyclone-type wet scrubber for dust control. The resulting slurry is pumped into the grinding circuit. All exposed conveyor surfaces are hooded from the dump pocket to the process building to further control dust.

The ore passes over an electronic belt scale and speed transducer used to control the speed of the apron feeder, as it moves on the conveyor belt.

### **3.1.2 Ore Grinding**

The ore on the conveyor is discharged into the feed chute of a semi-autogenous grinding (SAG) mill. Water is introduced along with the ore to produce a slurry containing approximately 70 percent solids. The discharge end of the SAG mill is hooded and ducted to a de-mister that returns the liquid to the leach circuit.

Pumps at the discharge end of the SAG mill convey the slurry to a distributor box containing four screens. Oversize material is recycled back into the SAG mill. Undersize material flows to a storage sump. The slurry is pumped from this sump through an automatic sampler to two, large leach feed surge tanks. These two surge tanks have sufficient storage capacity to supply the leach circuit with feed and allow running the SAG mill intermittently.

### **3.1.3 Leaching**

The leaching circuit dissolves uranium minerals from sandstone grains. A two-stage leaching circuit is used. A decant thickener is located between the leaching stages. The ore slurry from the two leach feed surge tanks is pumped to the first-stage leach (three tanks in series) where the ore is mixed and agitated with a sulfuric acid leach solution and sodium chlorate oxidant. Following the first-stage leach, the slurry is transferred to the decant thickener. The decanted liquid containing dissolved uranium is advanced from the thickener to the solvent extraction unit. The thickened solids are advanced to the second-stage leaching circuit (four tanks). Further leaching is accomplished at this stage by the addition of sulfuric acid with a small amount of oxidant. The second-stage leaching tanks are operated in series; the ore remains in contact with the leach solution for about 16 hours. Each tank has slow-moving propellers to keep the sand grains in suspension.

The discharge from the leach circuit is a slurry consisting of solids and a sulfuric acid solution with dissolved uranium. This slurry is fed to the countercurrent decantation stage.

### **3.1.4 Countercurrent Decantation Thickening**

The slurry is transferred to the first of a series of six CCD tanks (thickeners). The solids settle to the bottom of the first thickener. Flocculant is added to each thickener feed to increase the settling rate of the solids. They are transferred to each of the subsequent CCDs until they are discharged from the sixth thickener. The liquid that overflows the sixth thickener advances to the fifth thickener, and continues through each of the CCDs to the first CCD tank. This countercurrent flow of liquid and solids washes the residual dissolved uranium compounds from the solids. The liquid that overflows the first thickener is collected and pumped to the first-stage leach.

### **3.1.5 Solvent Extraction Feed**

The pregnant acid solution decanted from the decant thickener following the first-stage leach is transferred to a clarifier. The liquid contains approximately 200 parts per million (ppm) solids. The clarified liquor, containing about 50 ppm solids, is pumped through sand filters to a storage tank which feeds the SX circuit. The filtered liquid is expected to contain less than 10 ppm solids. Settled solids from the clarifier are added to the second-stage leach circuit. Solids collected in the sand filters are removed by backwashing and discharged to the second stage of the leach circuit.

### **3.1.6 Solvent Extraction**

The primary purpose of the SX circuit is to concentrate the uranium. This circuit has two functions. First, the uranium is transferred from the aqueous acid solution to an immiscible organic liquid by ion exchange. Then a reverse ion exchange process strips the uranium from the solvent, using aqueous ammonium sulfate.

In the first operation, the clarified and filtered acid solution is mixed with an organic solvent in an extraction mixer tank. The two solutions then separate in a settling tank. After going through a series of four mixing and settling tanks, almost all of the uranium is removed from the acid solution. The uranium-rich organic solvent is advanced to the stripping operation. Most of the barren acid solution (raffinate) is returned for use as wash water in the countercurrent decantation tanks. A portion of the raffinate is bled from the circuit and discharged with the process tailings.

In the stripping process, the loaded organic solvent is mixed with an aqueous ammonium sulfate solution. Ammonia is added to the solution to control the pH. The ammonium sulfate solution strips the uranium from the organic solvent. After processing through

four mixing and stripping tanks, the barren organic solvent is recycled to the beginning of the solvent extraction operation. The uranium-rich ammonium sulfate solution advances to the precipitation circuit.

### **3.1.7 Precipitation**

The pregnant ammonium sulfate solution passes through a heat exchanger and into the reaction tanks. The heat exchanger is used to control the temperature of the solution. Ammonia is injected into the reaction tanks to neutralize the solution and precipitate the uranium as yellowcake. The barren ammonium sulfate solution is filtered and recycled to the stripping stage of the solvent extraction circuit.

### **3.1.8 Drying and Packaging**

The precipitated yellowcake is washed to remove soluble impurities, dewatered, and dried in a multiple-hearth furnace. The dried product is then passed through a crusher for reduction to minus 0.25 in. The finished product is transported to a packaging station, where the yellowcake is packaged in steel drums at a design rate of about 583 pounds per hour. Product output from the plant is, however, expected to be only about 196 pounds per hour. Filled drums will be stored until a sufficient quantity exists for transport off site, subject to sales schedule.

### **3.1.9 Vanadium Extraction Circuit**

The depleted aqueous solution from the uranium solvent extraction, the uranium raffinate, serves as the feed for vanadium concentration. Three raffinate holding tanks will discharge into any of three pH/electromotive force (EMF) adjustment tanks. Anhydrous ammonia and a sodium chlorate solution will be added to these tanks to adjust pH and oxidize tetravalent vanadium to the pentavalent state, respectively.

A sludge thickener will be provided to enable settling and densification of particulate matter. The thickener underflow slurry will be discharged to the tailings facility. The thickener overflow solution will still contain a low concentration (about 100 ppm) of solids that would interfere with subsequent solvent extraction. A flotation column cell with a rising stream of finely dispersed air bubbles will separate the solids into a floating froth that will be pumped to the tailings facility. The clarified liquor will flow to the vanadium SX feed tank with a 45-minute retention time.

The SX process for vanadium concentrates and purifies the dilute and impure aqueous solution containing vanadium. This is accomplished with a recyclable organic solvent that typically contains an amine-type reagent (extractant), a long-chain alcohol (modifier), and kerosene (diluent). The extractant combines with the vanadium to form

a specific complex. Amines are anionic in character and extract anionic complexes; only pentavalent vanadium forms anionic complexes, hence the oxidation step mentioned above.

There will be a maximum of six extraction stages: each comprises an agitated mixer box that overflows into a rectangular tank called a settler. Streams of aqueous solution and solvent enter the mixer and a suspension is formed of small droplets of one phase in a continuous liquid phase of the other. Whether that phase is “organic continuous” or “aqueous continuous” depends on the relative volumes of the two. The phases separate in the settler. The lighter organic solvent floats on the aqueous layer, allowing separation by an overflow/underflow weir arrangement. The vanadium raffinate from the extraction circuit, containing low concentrations of uranium and vanadium, is then delivered to the tailings facility.

The loaded solvent flows through a quiescent tank with 10-20 minutes retention time to allow entrained droplets of the aqueous solution to separate, coalesce, and sink to the bottom. It is then pumped back to the SX feed tank. The loaded solvent is then contacted with aqueous sodium carbonate. This solution strips most of the vanadium content.

Stripping requires fewer stages, typically 2-3, than extraction. The mixer/settler design is the same, although the sizes differ. The stripped solvent is recycled to the extraction circuit and the concentrated solution (vanadium pregnant liquor, VPL) flows to another flotation column in which entrained droplets in the solvent are separated. The clarified pregnant liquor is held in two tanks for up to 8 hours, isolating the extraction circuit from the purification and precipitation circuit during maintenance interruptions.

The VPL flows to either of two steam-heated sodium hexavanadate (red cake) precipitation tanks to which sulfuric acid and sodium chlorate is added. The red cake slurry is fed onto a belt filter, producing a water-washed filter cake and a filtrate that will be returned to the vanadium SX feed tank, or to tailings, depending on impurity content. The red cake is discharged into either of 2 steam-heated dissolving tanks along with sodium carbonate and sodium chlorate and held for approximately 3 hours. The resulting solution passes through a filter feed tank with 1-hour retention, then into a pressure filter that is pre-coated with diatomaceous earth, or equivalent. Solids periodically backwashed from the filter are sent to the tailings facility and the clarified solution is delivered through a water-cooled heat exchanger to the ammonium metavanadate (AMV) crystallizer feed tank.

Ammonium sulfate solution and ammonium hydroxide are combined with the clarified solution and fed into a series of three strongly-agitated crystallizer tanks. The slurry of AMV crystals is fed onto another water-washed belt filter and the crystals are conveyed to the AMV cake bin. The filtrate flows through a small propane-fired submerged combustion evaporator, then returns to the crystallizer feed tank.

The AMV cake is dried in a fuel-fired rotary dryer, then treated in one of three ways, depending on market requirements. The AMV may be:

- Packaged and sold;
- Fed directly to a multiple-hearth calcining furnace (“deammoniator”), melted in a fusion furnace, tapped into a water-cooled casting wheel, and packaged as 99.5% V<sub>2</sub>O<sub>5</sub> (black flake); or
- Dissolved with dilute sulfuric acid in an “acidulation” tank, followed by addition of ammonium hydroxide to a neutralization tank, from which the liquor flows through a water-cooled heat exchanger to a crystallizer tank. The slurry of re-crystallized AMV is fed to a washing belt filter, thence to the deammoniator, fusion furnace, and casting wheel described above. This product would contain 99.9% V<sub>2</sub>O<sub>5</sub> and would also be called black flake.

### **3.2 Sources of Plant Wastes, Control Equipment and Instrumentation**

The predominant waste stream is processed ore, or tailings. Tailings are disposed of by permanent storage in a lined tailings cell that utilizes a natural depression, or basin, located adjacent to the plant site. The plant and its support facilities also produce lesser quantities of other liquid and solid wastes and effluents that are either recycled in process operations; or discharged to the tailings facility or a sanitary waste leach field.

Eight stacks discharge gaseous wastes and dust released by the plant. Three of the stacks are exhaust stacks from diesel powered generators used to produce electricity. The other five stacks are shown on Figure 3.0-1. Estimated emissions and physical characteristics of the mill stacks that could or do release radionuclides from the milling process are listed in Table 3.2-1.

Dust/mist control equipment at the processing facility consists of the following:

- **Wet Dust Collectors.** This collector will be a Ducon, or equivalent. These units operate on high-energy venturi principles. Dust and fume removal is greater than 99 percent efficient in the sub-micron range. An externally adjustable orifice permits maximum collection efficiency at varying gas flow.
- **Mist Vapor and Fume Collector.** This system will be an American Air Filter mist vapor and fume collector, or equivalent. This is a wet collector system that uses a perforated plate (acid resistant) and fluid bed to provide large areas of flooded contact surfaces and efficient scrubbing of exhaust air or gas.

### **3.2.1 Ore Stockpiles and Crushing**

The ore processed at the Shootaring Canyon Uranium Processing Facility undergoes numerous transfer, screening, and temporary storage operations in preparation for the uranium extraction procedures described in Section 3.1. There are potential effluent discharges at each stage of the process, including particulates containing radionuclides. The following paragraphs describe the plans to control and limit discharges of effluents.

### **3.2.2 Ore Handling**

#### **Solid Effluents**

The ore stockpiled on the ore pad during normal operations is used primarily as an inactive reserve. The stockpile is harvested when the mines cannot deliver sufficient ore to the plant.

Ore may be stockpiled on the ore storage pad in quantities exceeding a two week reserve, particularly when the mill is shutdown for longer than one month. For example, a 94,181-ton (94-day) supply was present on the ore pad during the summer of 1984.

Dispersal of dust from the stockpiles is controlled by water sprinkling or other dust suppression techniques. Environmental air particulate sampling results and visual observations are used to indicate when additional dust suppression efforts are required.

The dump pocket will be dust controlled by an automatic water spray system. From here the ore accumulates in the 75-ton hopper.

The next transfer is from the hopper via an apron feeder to the conveyor belt. Dust is collected at discharge and transfer points and transferred to a wet dust collector. Exhaust from the dust collector will be released through a stack about 100 feet above plant grade. The slurry from the dust collector will be pumped into the process circuit at the SAG mill.

A semicircular hood encloses the conveyor from the dump pocket to the process building. A continuous flow of water is introduced at the point of entry into the SAG mill, along with the ore feed. Effluent air from the wet dust collectors is expected to contain 0.03 to 0.05 g/m<sup>3</sup> of ore dust.

**Table 3.2-1: Plant Stack Emissions**

	Stack Location			
	Ore Dump Pocket	SAG Mill Leach Tanks	Yellowcake Centrifuge and Calciner Product Drumming	Laboratory Fume Hood Manifold
Stack Number	S-1	S-5	S07	S-11A S-11B
Emission Control Equipment	Wet dust collector	De-mister	Wet dust collector	Water wash down
Collection Efficient (percent)	99.8	> 99.9	99.7 U <sub>3</sub> O <sub>8</sub>	-
Exit Flow Rate (cfm)	6000	5000	3000	2000
Exit Temperature (°F)	Ambient	60-70	150-200	60
Exit Diameter (in.)	18	18	18	12
Release Height (ft) <sup>a</sup>	100	90	90	35
Effluent Concentrations/Emissions	Ore dust 0.03-0.05 g/m <sup>2</sup>	Negligible amounts of sulfuric acid mist and radon-222	Yellowcake (90 percent U <sub>3</sub> O <sub>8</sub> ) 0.03 lb/hr: ammonia 5 ppm	Miscellaneous vapors

Notes:

<sup>a</sup>Feet above ground level

cfm = cubic feet per minute

°F = degrees Farenheit

ft = feet

g/m<sup>2</sup> = grams per square meter

in. = inches

ppm = parts per million

The sample preparation area, or bucking room, is entirely enclosed in its own building. All sample processing equipment is tied, via a ducting system, to the wet dust collector at the dump pocket.

#### Liquid Effluents

The limited rain water runoff from the ore stockpiles and ore stockpile pad is diverted to a lined collection pond. The water will then be transferred to the solution storage/evaporation pond for recycle or evaporation.

#### Gaseous Effluents

Negligible concentrations of radon-222 escape from the de-mister controlling emissions from the SAG mill.

### 3.2.3 Leaching

#### Solid Effluent

No solid effluents are released from the leaching circuit.

#### Liquid Effluent

The leaching tanks contain a slurry of about 47 percent solids. These tanks are located on a sloping floor which drains to a floor sump. Spillages from the tanks will drain into the sump and be pumped back into the process system. The recessed impoundment area of the floor is large enough to contain the entire volume of any of the leaching tanks.

#### Gaseous Effluent

Negligible concentrations of radon-222 escape from the de-mister controlling emissions from the leach tanks.

### 3.2.4 Countercurrent Decantation Thickening Effluents

Acid wash solution is separated from the ore slurry in the CCD tanks. The barren tailings are discharged to the tailings disposal facility as a slurry consisting of approximately 45 percent solids by weight. Estimated concentrations of cations, anions, and compounds assumed to be contained in the slurry water are given in Table 3.2-2

**Table 3.2-2: Tailings Slurry Constituents**

<b>Element/Compound</b>	<b>Concentration (ppm)</b>
U <sub>3</sub> O <sub>8</sub>	0.4
Fe (total)	1730
Al <sup>3+</sup>	320
Ca <sup>2+</sup>	26
Mg <sup>2+</sup>	3500
SiO	520
SO <sub>4</sub> <sup>2-</sup>	26,500
Cl <sup>-</sup>	160
V <sub>2</sub> O <sub>5</sub>	530

Once the tailings slurry is within the seven-part lined tailings cell, a belt press or similar fluid extraction equipment will be used to extract most of the tailings solution from the tailings slurry yielding moist tailings in solid form and a liquid stream of tailings solution which will be placed in a lined process solution storage and/or evaporation pond, where it will be recycled to the mill or evaporated. All fluid storage ponds and the fluid extraction equipment will be located within the perimeter of the seven-part liner system. The target moisture content of the reduced moisture tailings is 35% by weight. Further details are presented in Plateau, 1998a, Plateau, 2005.

Another tailings fluid separation method being considered is to filter the tailings slurry at the CCD circuit and transport the dewatered tailings to the tailings cell. The tailings solution would then either be recycled or transported to the solution storage/evaporation pond.

The surface area of tailings available for dust generation will be minimized by progressively covering a portion of a cell with moist tailings. When not working in the area, an interim cover or dust suppression chemical will be applied to control dust. These dust suppression methods will be used to control radioactive particulate emissions prior to placement of the final clay and rock cap on the cell.

The countercurrent decant thickeners are located outdoors. The thickeners are placed on a curbed, sloped concrete slab. A catch basin and pumps are located at the lower end of the slab. The sloping slab and sump are designed to contain the contents of one thickener. A 30-in. overflow pipe is connected to the sump. If a spill cannot be contained on the slab, this pipe will discharge the spill to the tailings facility by gravity. Alternatively, the spill could be pumped to the CCDs. For leaks and spills, or possibly a tank rupture, the spilled material is normally returned to the decant thickeners for reuse.

#### Gaseous Effluents

Some water vapor, acid mist, and minor amounts of radon-222 escape into the atmosphere from the open thickeners. Natural air currents will dilute and disperse these materials.

### **3.2.5 Solvent Extraction**

#### Solid Effluents

No solid effluents are released from the solvent extraction circuit.

#### Liquid Effluents

The solvent extraction and stripping tanks; and their associated mixers, pumps, piping, and small tanks, are located in an enclosed building. The concrete floor of this building is curbed and the volume below the top of the curb is large enough to accommodate at least the entire volume of the largest of the tanks.

The clarified solution storage and raffinate storage tank are located outside the solvent extraction building in areas surrounded by dikes. Spills are retained in the impoundments and are recovered for reuse or discharged to the tailings facility by a portable sump pump.

Approximately 75 gallons of kerosene are used each day in the solvent extraction circuit. Eventually, most of that kerosene is discharged from the plant to the tailings, where the kerosene remains adsorbed on tailings particles.

#### Gaseous Effluents

Approximately eight gallons of kerosene evaporate each day from the solvent extraction circuit. Air in the solvent extraction building is released into the atmosphere through three roof ventilators. These ventilators are located about 60 ft (18 m) above ground level, and each has a forced draft of about 12,000 cfm.

### **3.2.6 Precipitation**

#### Solid Effluents

No solid effluents are released from the precipitation circuit.

#### Liquid Effluents

The precipitation and yellowcake thickener tanks, as well as all associated piping and appurtenances, are contained in the product building. Spills are collected and returned to the system.

#### Gaseous Effluents

The exhaust gases contain traces of radon-222.

### **3.2.7 Precipitation, Drying, and Packaging**

#### Solid Effluents

After the precipitated yellowcake is washed and dewatered, it is dried in a multiple hearth furnace and then passed through a crusher. Exhaust from the furnace is vented to the atmosphere through a wet dust collector. Yellowcake dust (about 90 percent  $U_3O_8$ ) is emitted with this exhaust at a rate of about 0.016 lb/hr (7.3 g/hr).

The finished product is transported to a packaging station and loaded into steel drums. Packaging is done in an enclosed room. Air from the room is passed through the same wet dust collector as the furnace discharge described above. Product dust is emitted with the exhaust gases at a rate of about 0.02 lb/hr (9.5 g/hr).

#### Liquid Effluents

No liquid effluent is released from the drying and packaging circuits.

## Gaseous Effluents

The exhaust gas from the drying furnace contains about 5 ppm ammonia.

### **3.3 Controls of Plant Wastes and Effluents**

The control systems used to minimize emissions from the plant are discussed in this section. Volatile fuels and reagents are stored in closed tanks to minimize the escape of vapors to the atmosphere. Many unit operations are carried out within buildings or closed vessels. The air and gases from the process vessels are passed through wet dust collectors or de-misters to remove dust, mists, and gaseous pollutants. Gaseous effluents and dust are discharged from stacks to promote atmospheric dilution and dispersion.

Buildings housing various plant operations have concrete floors. These floors slope to concrete lined sumps that collect any spillage. Spilled materials are pumped back into the appropriate plant circuit. The floors of the buildings are curbed or recessed to contain the volume of at least the largest process tank. Fuel oil, kerosene, and acid storage tanks are located in open areas, and are placed within impoundments capable of holding the volume of the enclosed tanks.

The nuclear density gauges have been removed from the site and new gauges will be installed at appropriate locations. The license to possess these sources is administered by the State of Utah.

Sewage disposal is conducted in accordance with the requirements of the Bureau of Water Pollution Control of the Utah State Division of Health. The permit was approved in 1979.

The plant has an analytical and metallurgical laboratory that routinely analyzes and tests the ore and process streams to optimize the extraction of uranium from ores with differing properties. The laboratory routinely analyzes the various process reagents and the finished product as quality control measures. The fume hoods of the laboratory collect air, chemical fumes, and mists and discharge them through a scrubber and stack to the atmosphere. The effluent does not contain sufficient quantities of potential radionuclides or chemicals to constitute a significant impact.

## **4. Operations**

This section presents the corporate organization, site management activities, and employee qualifications required to control source materials both within the mill and in the environment around the mill. All activities related to assessing the environmental and health impacts from operations are conducted using Standard Operating Procedures.

### **4.1 Corporate Organization and Administrative Procedures**

The Vice President of Milling has overall policy and management responsibilities for the Shootaring Canyon Uranium Mill. The Mill Superintendent is responsible for enforcing the policies and procedures and has the ultimate on-site authority. Written operating procedures have been established for routine production activities involving the handling and processing of radioactive materials and routine radiation safety practices.

The Radiation Safety Officer (RSO) reports directly to the Vice President of Milling and is responsible for compliance with all environmental health and safety regulations, implementing all radiological and environmental monitoring procedures, and for compliance with the regulations and requirements administered by the State of Utah.

The basis for the radiation safety program is to maintain radiation exposures to levels that are as low as reasonably achievable (ALARA) for all employees, contractors, visitors, and members of the general public. The implementation of a successful ALARA program is the responsibility of management and all workers. Workers and management have the responsibility for developing work practices that minimize radiation exposure. ALARA is a primary consideration in worker training and developing work plans.

### **4.2 Personal Qualifications and Training**

Minimum education and experience qualifications for the RSO, Environmental and Safety Technicians, and Radiation Safety Technicians are specified by the Utah Department of Environmental Quality, Bureau of Radiation Control.

The radiological protection training program for all workers includes providing basic radiation protection training for new employees and contractors, on-the-job training, and annual refresher training. The formal training includes the fundamentals of radiation, regulatory limits, methods for limiting radiation exposure, and personnel monitoring methods.

### **4.3 Security**

The boundary limits of the processing facility are posted and enclosed by a fence except for sections where cliffs or other topographic features form a natural boundary. The process plant, mill ore storage area, ancillary facilities (such as laboratory, office building, warehouse and maintenance facilities, electrical power distribution, and reagent storage), and the entire tailings disposal area are located within the restricted area boundary of the facility. The restricted area is posted with "Caution Radioactive Materials" signs.

Access to all areas, except the general office building, employee parking and visitor parking, are controlled by fences and gates. Warning and information signs are posted near the main gate. Twenty-four hour security will be provided when the processing facility is in operation. During extended periods of non-operation, access to the restricted area is through the main gate which is locked when personnel are not present. Visitors, including temporary workers, will be admitted only after management is assured that the person has appropriate radiation safety training and controls are in place to limit his/her radiation exposure.

### **4.5 Radiation Safety**

The Radiation Safety Program is implemented by the RSO and a staff of technicians. The program consists of employee training, work-place monitoring, environmental and effluent monitoring, personnel monitoring and dose assessment, records management, and regulatory compliance. Supporting activities include job planning assistance, preparing radiation work permits, preparing and maintaining standard operating procedures, monitoring equipment calibration and maintenance, and conducting audits.

## 5. Environmental Characteristics of Mill Site

### 5.1 Demography

The population of Utah in 2004 was 2,389,039 (US Bureau of Census, 2004). This population represents an overall density of 29 persons per square mile (mi<sup>2</sup>), [(or 8.9 persons per square kilometer (km<sup>2</sup>)].

Utah is sparsely populated. More than 72 percent of Utah's population lives in four counties: Salt Lake, Utah, Davis, and Weber, which contain the cities Salt Lake City, Provo, Bountiful, and Ogden, respectively.

The population in the project area is also sparse. Garfield County is the fifth largest county in Utah, covering 5174 mi<sup>2</sup> (13,411 km<sup>2</sup>). However, the population density is 1 person per mi<sup>2</sup> (1.6 persons per km<sup>2</sup>). Approximately 89 percent of Garfield County land is owned by the U.S. Government in the form of national parks, forests, recreation areas, and resource lands. The U.S. Bureau of Land Management (BLM) has jurisdiction over surface and mineral rights on approximately 57 percent of the total area of Garfield County. These lands are used for recreation, mineral development, livestock grazing, and natural resource management. Ninety percent of the residents live in the western portion of the county near the north-south transportation corridor through Utah (Interstate 15 and U.S. Highway 89). There are also some ranches and farms scattered across Garfield County. The bordering counties of Wayne, San Juan, and Kane are also sparsely populated (See Table 5.1-1 for population data in the vicinity of the mill site).

**Table 5.1-1: 2004 Area Population for Wayne, Garfield, San Juan, and Kane Counties and the State of Utah**

County	Land Area <sup>a</sup>		2004 Population <sup>b</sup>		
	Square Kilometers	Square Miles	No.	People/km <sup>2</sup>	People/mi <sup>2</sup>
Wayne	6,446	2,489	2494	0.4	1.0
Garfield	13,512	5,217	4427	0.3	0.8
San Juan	20,419	7,884	14,015	0.7	1.8
Kane	10,632	4,105	6178	0.6	1.5
State totals	213,260	82,340	2,389,039	11.2	29

Notes:

km<sup>2</sup> = square kilometers

mi<sup>2</sup> = square miles

<sup>a</sup>\*\*\*

<sup>b</sup>U. S. Bureau of Census, 2004, Utah Office of Planning and Budget

Residents living near the mill site are located in Ticaboo, the Off Shore Marina, the Shipyard, Bullfrog Basin Marina, the Lake Powell Yacht Club, Halls Crossing Marina, and Hanksville.

Ticaboo and the Off Shore Marina lie about 2.5 and 3 miles (4 and 4.8 km) south of the mill site, respectively. The Shipyard is located on Highway 276, approximately 6 miles (9.5 km) south of the site. The Lake Powell Yacht Club is located on Highway 276 approximately 4 miles south of Ticaboo. Bullfrog Basin Marina lies on Lake Powell, about 14 miles (22 km) south of the mill site. Halls Crossing Marina lies approximately 3.5 miles (5 km) further south of Bullfrog Marina, on the opposite shore of Lake Powell. Hanksville is located about 46 air miles (74 air km) north of the site, in Wayne County. Green River and Moab, Utah are larger communities located approximately 93 and 86 air miles (150 and 138 air km) or 110 and 160 road miles away, respectively.

The population of Ticaboo was 60 in August 2004. The inhabitants are primarily Plateau Resources Limited employees and their families and most reside permanently in mobile homes. The population is expected to increase to approximately 200 when the mill operates. The community is constructed to accommodate 98 single-family homes, 144 mobile homes, and 41 recreational vehicles or camp trailers. The facilities available at Ticaboo consist of a 72 unit motel; restaurant and bar, grocery store (all open seasonally), and mobile-home park. During the school year, approximately 2 Ticaboo children attend school at Bullfrog Marina. The Shipyard and Off Shore Marina children also attend school at the Bullfrog Marina. It is expected that all employees will reside in Ticaboo; however, there may be a several who will commute daily from Hanksville and weekly from Green River, Utah and /or Grand Junction, Colorado.

The Off Shore Marina consists of approximately 18 employees and family members. The Shipyard is a privately owned and operated boat storage and gas station facility. Five people live and work at the Shipyard. Bullfrog Basin Marina consists of approximately 210 employees and family members. The marina is a recreational community, part of the Glen Canyon National Recreation Area. Transient residence at Bullfrog Basin Marina is limited by National Park Service regulations to two months at a time. Peak use of the Marina may approach 43,000 persons per month during summer. The Lake Powell Yacht Club houses six employees and family members. Halls Crossing Marina houses 94 permanent employees and family members. Hanksville has a current population of 250.

Gold Creek Ranch, consisting of private summer home sites, is located approximately 13 miles (20.5 km) northwest of the project. At this time, there are no permanent residents living in the development.

Few other permanent settlements exist in the general area surrounding the mill site. According to a field study conducted by Plateau Resources, the total number of permanent residents living within an 80 km radius of the mill site is 1544 (Plateau Resources, 1996 supplemented by August 2004 data). The permanent population within a 50 mile (80 km) radius of the facilities is 1,544 residents and distributed as shown in Table 5.1-2.

One national recreation area, three national parks, two national forests, one BLM primitive area, and one state park exist wholly or in part within a 50 mile (80 km) radius of the mill site. Traditional activities such as seasonal grazing, minerals prospecting, mining, and isolated ranching in these reserves have been supplemented with recreational

activities during the last 10 to 20 years, as adequate roads were built. The recreational activities include hiking, backpacking, camping, biking, sight-seeing, and hunting. Access to the area by the general public is facilitated by parks and recreation services and concessionaires, who report that their staffs may double or triple during the summer months to accommodate the influx of tourists.

Visitations to these park areas during the spring through fall months result in a substantial transient population. For example, Glen Canyon National Recreation Area receives an average of three million visitors per year. In addition, the Dixie National Forest campgrounds within the population distribution survey area reported 24,000 visitors from May 15 through Sept. 30, 1995 with 33,000 for the year. Natural Bridges National Monument received an average visitation of 97,236 per year from 2002 to 2004. Although permanent residency is limited within all the park boundaries, overnight visitors are common, thus increasing the number of people who may be present in the area at any given time.

**Table 5.1-2: Population Distribution within an 80 Kilometer Radius of the Shootaring Mill Site**

km	N 0°	NNE 22.5°	NE 45°	ENE 67.5°	E 90°	ESE 112.5°	SE 135°	SSE 157.5°	S 180°	SSW 202.5°	SW 225°	WSW 247.5°	W 270°	WNW 292.5°	NW 315°	NNW 337.5°
1.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.5	0	0	0	0	0	0	0	0	260	0	0	0	0	0	0	0
4.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.5	0	0	0	0	0	0	0	0	18	0	0	0	0	0	0	0
15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
25	2	0	0	0	0	0	0	0	304	0	0	0	0	0	0	0
35	0	0	21	0	2	0	0	0	0	0	0	0	0	0	0	0
45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4	0
55	4	0	0	0	0	0	0	0	0	0	0	0	0	0	8	0
65	0	0	0	0	8	1	0	0	60	0	0	0	0	180	2	3
75	250	2	0	0	0	0	0	0	360 <sup>a</sup>	0	0	0	0	10	0	45
Tot.	256	2	21	0	10	1	0	0	1002	0	0	0	0	190	14	48

Notes:

<sup>a</sup>The total population of the portion of the Navajo Indian Reservation included in the January 1996 survey was reported by the Navajo Mountain Trading Post at 360.

## 5.2 Meteorology

The climate in the vicinity of the site is semi-arid (steppe), although it varies with elevation and terrain features. Skies are usually clear with abundant sunshine and annual precipitation is low. Because of the low humidity, the rate of evaporation is high. Daily ranges in temperature are relatively large, and winds are normally light to moderate.

The data included in this section is the most recent site specific information available. The meteorological station at the processing facility was not monitored during the interim shutdown period.

### **5.2.1 Wind and Atmospheric Stability**

The relative frequency distribution for wind direction and wind speed by stability class is presented in Table 5.2-1 and is based on the one-year period from October 1979 through September 1980. Percentage data recovery is summarized by month in Table 5.2-2. The annual data recovery is about 76 percent, as shown in Table 5.2-3.

The frequency distributions of atmospheric stability; and dominant wind directions and speeds are presented in Tables 5.2-3 and 5.2-4, respectively. Calms are included in the lowest wind speed class. This is also true of the joint frequency distribution.


Winds of six knots or less comprise approximately 70 percent of the wind speed total frequency. The annual wind speed average is also six knots, with higher average speeds occurring in winter.

Compared to Supplement S2 of the Environmental Report for the Shootaring Canyon Uranium Project (Woodward-Clyde Consultants, 1978) herein the "1978 Environmental Report," there has been an apparent decrease in E stability with increases in B, C, and D stabilities.

The October 1979 through September 1980 wind direction distribution is similar to data collected at the processing facility from July 22 to September 30, 1977 (Woodward-Clyde, 1978). South-southwest is the predominant direction, with the S to SW and N to NE sectors containing approximately 57 percent of the wind direction occurrences.

A wind rose for the period October 1979 through September, 1980 is included as Figure 5.2-1. A statistical summary of the wind rose data is presented in Table 5.2-5.

**Figure 5.2-1: Shootaring Canyon Wind Rose**

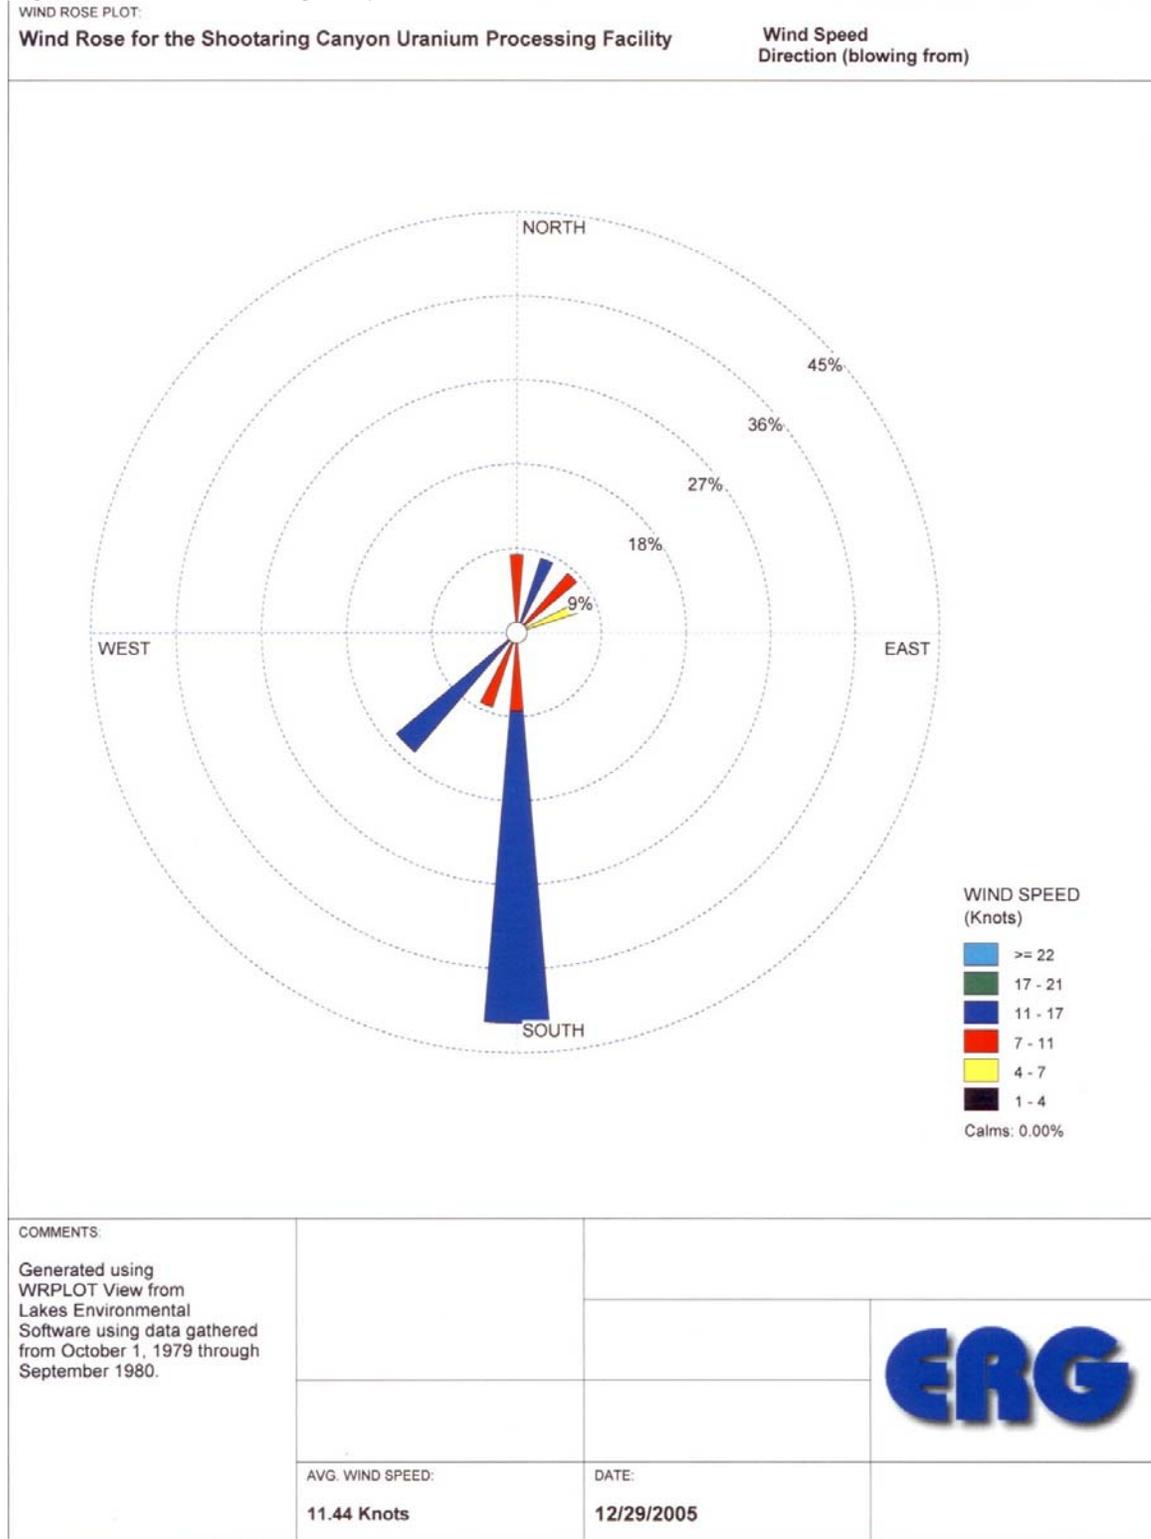

**Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class**

<b>Direction</b>	<b>North</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0.001789	0.002386	0.000895	0	0.000298	0
C	0.001807	0.000895	0.001193	0.000298	0	0
D	0.016139	0.013421	0.007754	0.000596	0.000298	0
E	0.018491	0.007754	0.002684	0.002982	0.000298	0
F	0.019982	0.012228	0.003877	0.000596	0	0
<b>Subtotal</b>	<b>0.058208</b>	<b>0.036684</b>	<b>0.016403</b>	<b>0.004472</b>	<b>0.000894</b>	<b>0</b>

<b>Direction</b>	<b>North-Northeast</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0.000596	0.001193	0.000895	0	0	0
C	0	0.000298	0.000298	0.000596	0	0
D	0.017035	0.008052	0.004772	0.002386	0	0.000596
E	0.023859	0.004772	0.002088	0.002982	0	0
F	0.015807	0.009246	0.001491	0.001491	0.000298	0.000298
<b>Subtotal</b>	<b>0.057297</b>	<b>0.023561</b>	<b>0.009544</b>	<b>0.007455</b>	<b>0.000298</b>	<b>0.000894</b>

<b>Direction</b>	<b>Northeast</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0	0	0.000298	0.000895	0	0
C	0	0	0.001193	0.000298	0	0
D	0.005081	0.000596	0.004175	0.004175	0.000596	0.000298
E	0.007754	0.001789	0.002386	0.006561	0.00507	0.000596
F	0.00507	0.002983	0.001491	0.001789	0.000894	0
<b>Subtotal</b>	<b>0.017905</b>	<b>0.005368</b>	<b>0.009543</b>	<b>0.013718</b>	<b>0.00656</b>	<b>0.000894</b>

**Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued)**

<b>Direction</b>	<b>East-Northeast</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0	0	0	0.000596	0	0
C	0	0	0	0.000895	0	0
D	0.008069	0.000895	0.000596	0.001789	0	0
E	0.005965	0.000298	0.001491	0.002684	0.001193	0
F	0.006561	0.000596	0.001193	0.000298	0	0
<b>Subtotal</b>	0.020595	0.001789	0.00328	0.006262	0.001193	0

<b>Direction</b>	<b>East</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0	0.000298	0	0	0	0
C	0	0	0.000596	0.000298	0	0
D	0.010759	0.001119	0.000895	0	0	0
E	0.011631	0	0.000895	0.000298	0	0
F	0.009842	0.009248	0.000298	0	0	0
<b>Subtotal</b>	0.032232	0.010665	0.002684	0.000596	0	0

<b>Direction</b>	<b>East-Southeast</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0	0.000596	0	0	0	0
C	0	0	0	0	0	0
D	0.005081	0.000895	2.98E-05	0	0	0
E	0.007158	0.00023	0.000298	0.000298	0.000596	0
F	0.001491	0.001193	0	0	0	0
<b>Subtotal</b>	0.01373	0.002914	0.000328	0.000298	0.000596	0

**Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued)**

<b>Direction</b>	<b>Southeast</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0	0	0	0
B	0	0.000596	0	0	0	0
C	0.000301	0.000298	0	0	0	0
D	0.004184	0.000596	0.000298	0	0	0
E	0.003281	0.001193	0.000895	0	0	0
F	0.004175	0.001789	0.000596	0.000298	0	0
<b>Subtotal</b>	0.011941	0.004472	0.001789	0.000298	0	0

<b>Direction</b>	<b>South-Southeast</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0	0	0.000298	0	0	0
B	0.000298	0.001491	0.000298	0	0	0
C	0.000602	0.000596	0.000596	0	0	0
D	0.01046	0.009544	0.003877	0.000596	0	0
E	0.00686	0.005965	0.002982	0	0	0
F	0.005666	0.003579	0.002982	0.000596	0	0
<b>Subtotal</b>	0.023886	0.021175	0.011033	0.001192	0	0

<b>Direction</b>	<b>South</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	<b>1.5</b>	<b>5.5</b>	<b>10</b>	<b>15.5</b>	<b>21.5</b>	<b>28</b>
A	0.000298	0	0.000596	0	0	0
B	0.005368	0.011333	0.010438	0.000298	0	0
C	0.006024	0.008947	0.004772	0.000895	0	0
D	0.014645	0.023859	0.022368	0.002088	0	0
E	0.013719	0.008351	0.011631	0.002982	0.000895	0
F	0.008947	0.003574	0.00328	0.000895	0.00023	0
<b>Subtotal</b>	0.049001	0.056064	0.053085	0.007158	0.001125	0

**Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued)**

<b>Direction</b>	<b>South-Southwest</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0.000298	0.000298	0.000895	0	0	0
B	0.007456	0.015807	0.008647	0.002386	0	0
C	0.00753	0.008649	0.010737	0.005667	0	0
D	0.012254	0.009842	0.008351	0.00686	0.000895	0
E	0.007456	0.001789	0.003281	0.001491	0.000298	0.000596
F	0.007157	0.002386	0.000895	0.000596	0	0.000298
<b>Subtotal</b>	0.042151	0.038771	0.032806	0.017	0.001193	0.000894

<b>Direction</b>	<b>Southwest</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0	0.000596	0	0	0	0
B	0.007754	0.003877	0.002982	0.000596	0	0
C	0.004217	0.002386	0.00507	0.003877	0	0
D	0.005678	0.003877	0.004175	0.004474	0.000298	0
E	0.001789	0.000895	0.00023	0.000596	0.000298	0
F	0.002684	0.000596	0.000298	0	0	0
<b>Subtotal</b>	0.022122	0.012227	0.012755	0.009543	0.000596	0

<b>Direction</b>	<b>West-Southwest</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0.000596	0.000298	0	0	0	0
B	0.008052	0.005368	0.002386	0.000895	0	0
C	0.003313	0.001491	0.002386	0.001491	0	0
D	0.007173	0.001789	0.003877	0.002684	0.000298	0
E	0.004477	0.000895	0.001491	0.000596	0	0.000895
F	0.007456	0.000894	0.000298	0	0	0.000298
<b>Subtotal</b>	0.031067	0.010735	0.010438	0.005666	0.000298	0.001193

**Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (continued)**

<b>Direction</b>	<b>West</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0	0.000298	0	0	0	0
B	0.004474	0.002684	0.004772	0.000596	0	0
C	0.003614	0.001789	0.002386	0.000895	0	0
D	0.015242	0.003281	0.00686	0.003281	0	0.000298
E	0.009544	0.001783	0.001193	0.000596	0	0.000895
F	0.008948	0.002088	0	0	0	0
<b>Subtotal</b>	0.041822	0.011923	0.015211	0.005368	0	0.001193

<b>Direction</b>	<b>West-Northwest</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0	0	0	0	0	0
B	0.001193	0.000895	0.000895	0.000298	0	0
C	0.000904	0.000596	0	0.000298	0	0
D	0.003885	0.001491	0.000596	0.001193	0.000298	0.000298
E	0.003281	0.000298	0	0	0	0
F	0.00507	0.000596	0.000894	0	0	0
<b>Subtotal</b>	0.014333	0.003876	0.002385	0.001789	0.000298	0.000298

<b>Direction</b>	<b>Northwest</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0	0	0	0	0	0
B	0.000596	0	0.000293	0.000596	0	0
C	0.001205	0	0.001193	0	0	0
D	0.001793	0.000596	0.000298	0.001193	0.000298	0.000596
E	0	0.000298	0	0.000298	0	0
F	0.001491	0.000298	0	0	0.000596	0
<b>Subtotal</b>	0.005085	0.001192	0.001784	0.002087	0.000894	0.000596

**Table 5.2-1: Relative Frequency Distribution for Wind Direction and Wind Speed by Stability Class (concluded)**

<b>Direction</b>	<b>North-Northwest</b>					
	<b>Wind Speed (mph)</b>					
<b>Stability Class</b>	1.5	5.5	10	15.5	21.5	28
A	0	0	0	0	0	0
B	0.001789	0.001789	0.000298	0	0	0.000298
C	0.000904	0.000596	0.000596	0.000298	0.000298	0
D	0.004483	0.002982	0.002088	0.001449	0.000895	0.000895
E	0.006561	0.002088	0.001789	0.000298	0	0
F	0.006562	0.000596	0.000328	0	0.001789	0.00023
<b>Subtotal</b>	0.006562	0.000596	0.000328	0	0.001789	0.00023

**Table 5.2-2: Wind Speed and Direction Data Recovery**

<b>Year</b>	<b>Month</b>	<b>Wind Speed and Direction Recovery (percent)</b>
1979	October	89.7
	November	12.2
	December	60.3
1980	January	86.2
	February	94.8
	March	85.2
	April	95.6
	May	70.6
	June	100.0
	July	67.2
	August	57.9
	September	98.8
	Summary for October 1979 to September 1980	76.4

**Table 5.2-3: Annual Relative Frequency Distribution of Atmospheric Stability at Shootaring Canyon**

<b>Pasquill Stability Class</b>	<b>Occurrence (percent)</b>
A	2.2
B	10.1
C	12.3
D	45.6
E	17.4
F	12.5

Period of Record: Oct. '79 through Sept. '80

**Table 5.2-4: Meteorological Parameter Summary for Shootaring Canyon, October 1979 through September 1980**

<b>Year</b>	<b>Month</b>	<b>Predominant Wind Direction</b>	<b>Wind Speed (Average Knots)</b>
1979	October	NE, S	6.1
	November	SSW, SW	5.0
	December	NE, E	3.6
1980	January	S	5.1
	February	N	5.5
	March	N, E	5.2
	April	S	6.8
	May	S	6.9
	June	S	7.3
	July	S	6.1
	August	SW	6.6
	September	SW	6.4
	Annual	S	6.0

**Table 5.2-5: Wind Statistical Summary January 1 to December 31, 1983**

Compass	Average Heading	Wind Speed (percent)	Wind (percent)
	N	5.20	8.91
	NNE	6.89	11.25
	NE	4.71	3.79
	EE	5.07	2.70
	E	4.71	4.39
	ESE	4.67	2.20
	SE	5.34	3.97
	SSE	5.28	5.78
	S	6.22	11.44
	SSW	7.31	15.96
	SW	7.45	7.70
	WSW	7.76	5.23
	W	5.39	2.29
	WNW	5.79	3.11
	NW	7.15	4.99
	NNW	5.34	6.27
Class	No. of Occurrences	Percent of Occurrences	Justification
Calm	8	0.13 of 6328	Observations
Variable	0	0.0 of 6328	Observations
Missing	2424	27.67 of 8760	Possible observations

Notes:  
Data Capture = 72.329 percent

### 5.2.2 Precipitation

The annual average precipitation is estimated to be about 11 inches at the processing facility based on regional data compiled for periods of more than 30 years (Table 5.2-6). Table 5.2-7 lists monthly precipitation recorded at the processing facility from 1980 through 1982 indicates precipitation during this short period of approximately 7 inches. Most precipitation at the site occurs as rainfall; a maximum of about 10 to 25 percent of the annual total is expected to occur as snowfall on nearby mountain slopes. Precipitation is about 20 inches or more on the upper slopes of Mount Hillers, north of the site.

A rain gauge exists at the site and is read daily. The total recorded rainfall for 2004 was 4.74 inches. The total for the first eleven months of 2005 was 9.9 inches.

**Table 5.2-6: Annual Precipitation at Selected Regional Weather Stations in Vicinity of the Processing Facility**

Station	Elevation (feet msl)	Precipitation (inches)
Bluff <sup>a</sup>	4316	15.2
Bullfrog Basin <sup>b</sup>	3822	11.2
Boulder <sup>c</sup>	6642	30.2
Escalante <sup>a</sup>	5786	20.7
Hanksville <sup>d</sup>	4308	10.3

Notes: National Climatic Data Center  
(<http://www.ncdc.noaa.gov/oa/climate/online/coop-precip.html>)

<sup>a</sup> Period of record: 67 years, 1931-1997.

<sup>b</sup> Period of record: 31 years, 1967-1997.

<sup>c</sup> Period of record: 44 years, 1954-1997.

<sup>d</sup> Period of record: 66 years, 1931-1996.

**Table 5.2-7: Monthly Precipitation at the Processing Facility, 1980-1982**

Month	Precipitation (inches)		
	1980	1981	1982
January	1.02	0	0.38
February	1.04	0	0.22
March	1.11	0.98	0.16
April	0.21	0.08	0
May	0.18	0.31	0.06
June	0	0.76	0
July	0.29	0.53	0.16
August	1.11	0.32	1.94
September	1.33	1.00	1.15
October	0.80	2.13	0
November	0.26	0.69	0.89
December	0.28	0.06	0.76
<b>Totals</b>	<b>7.63</b>	<b>6.86</b>	<b>5.72</b>

Two separate rainfall seasons exist in the region. The first occurs in late summer and early autumn, when occasional moisture-laden air masses from the Gulf of Mexico bring showers and thunderstorms. The second rainfall period occurs during the winter, when Pacific storms move into the region.

### 5.2.3 Severe Weather Events

Thunderstorms in July and August result in scattered precipitation over the site. The usually intermittent, scattered nature of thunderstorm precipitation is reflected in the data

collected during these months. Comparisons with concurrent data from several weather stations in the region presented in Table 5.2-8, indicate that thunderstorms produce varying amounts of rainfall with no consistent relation to elevation.

Related precipitation is usually light, but a heavy local storm can produce more than an inch of rain in a day. The maximum precipitation reported to have fallen within 24 hours over a 30-year period at Blanding, Utah was 1.98 inches (U.S. Department of Commerce, undated). Hailstorms are unusual in this area.

Table 5.2-9 shows the maximum precipitation estimated for the site (point precipitation) for specific durations and recurrence intervals. Maximum short-term precipitation is usually associated with summer thunderstorms, although winter storms may occasionally deposit comparable amounts.

Strong winds can occur along with the thunderstorms in the spring and summer. The site is also susceptible to occasional dust storms, which vary in intensity, duration, and time of occurrence. The basic conditions for blowing dust are found in the general vicinity: wide areas of exposed, dry topsoil; and occasional strong, turbulent winds. Dust storms usually occur during the warmer months following frontal passages and are occasionally associated with thunderstorm activities.

Tornadoes have been observed in the general region, but they occur infrequently. As presented in the 1978 Environmental Report (Woodward-Clyde, 1978), the probability of a tornado striking a given point in the vicinity of the facility site is estimated at 0.000032. The recurrence interval of such an incident is estimated at 31,000 years.

**Table 5.2-8: Total Monthly Precipitation Recorded for the Site and at Selection Regional Stations, 1980**

Month	Processing Facility (4650 ft)	Regional Station with Elevation			
		Bullfrog Basin Marina (3822 ft)	Bluff (4316 ft)	Boulder (6642 ft)	Hanksville (4308 ft)
January	1.02	1.27	2.49	2.73	0.27
February	1.04	1.49	0.87	2.35	1.86
March	1.11	0.44	0.54	0.39	0.32
April	0.21	0.52	0.88	0.89	0.63
May	0.18	0	0	0	0
June	0	0.08	0.13	0.24	0.06
July	0.29	0.5	0.15	0.74	0.23
August	1.11	0.61	0.26	2.41	2.73
September	1.33	0.5	0.88	1.03	0.49
October	0.80	0.07	0.22	0.07	0.1
November	0.26	0.55	0.13	0	0.03
December	0.28	8.01	8.11	13.58	7.31
<b>Totals</b>	7.63	14.04	14.66	24.43	14.03

Notes:

Source: National Climatic Data Center

(<http://www.ncdc.noaa.gov/oa/climate/online/coop-precip.html>)

**Table 5.2-9: Estimated Maximum Point Precipitation for Selected Durations and Recurrence Intervals**

Duration	Recurrence Interval (years)				
	2	10	25	50	100
	Precipitation (inches)				
1 hour	0.7	1.2	1.5	1.7	1.9
12 hours	1.1	1.8	2.2	2.5	2.7
24 hours	1.2	2.0	2.4	2.7	3.2
2 days	1.3	2.3	2.7	3.0	3.5
7 days	1.8	2.7	3.3	3.6	4.2
10 days	2.0	3.0	3.5	4.2	4.5

Notes: Sources are Hershfield, 1961; Miller, 1964.

### 5.3 Hydrology

Groundwater is the only water of substantial yield in the vicinity of the processing facility. No perennial streams occur at the site.

Information regarding ground water and surface water hydrology; and geology at the site is described in previous reports (Woodward-Clyde Consultants, 1984, Plateau, 1998c, Hydro-Engineering, 1998).

## **6. Radiological and Other Environmental Impacts from Proposed Action**

Radiological and other environmental impacts from the proposed action have been assessed from normal operations as well as from accidents at the mill site and from transport of ore and yellowcake to and from the mill site, respectively.

### **6.1 Off-Site Radiological Releases and Dose Assessment from Normal Operations**

The radiation exposure was quantified using the MILDOS-AREA program, version 2.20 beta (ORNL, 1998). MILDOS-AREA is a computer code developed at Argonne National Laboratory that calculates the radiation doses received by individuals and the general population within an 80-km radius of an operating uranium recovery facility. The MILDOS-AREA code was designed as a primary licensing and evaluation tool to provide an accurate analysis of uranium facilities for critical licensing and regulatory decisions. It is used by the Uranium Recovery Branch staff of the U.S. Nuclear Regulatory Commission (NRC) to perform compliance evaluations and routine radiological impact analyses for various uranium recovery operations. The code is also used by uranium recovery licensees to perform evaluations for a specific site. MILDOS-AREA adopts many assumptions in conjunction with input parameters detailed in the U.S. Nuclear Regulatory Commission Draft Regulatory Guide RH 802-4 and portions of the Uranium Dispersion and Dosimetry (UDAD) document (Argonne National Laboratory).

MILDOS-AREA (Argonne, 1998) can consider nine environmental pathways: external radiation, inhalation of particulates and radon; and ingestion of soil, plant foods, meat, milk, aquatic foods, and water. Models developed in MILDOS can consider both point sources (stacks, vents) and area sources (ore pads, tailing areas). Particulate releases considered are explicitly limited to uranium-238, thorium-230, radium-226, and lead-210. The model accounts for releases of associated decay progeny using an assumption of secular equilibrium. Secular equilibrium occurs when the parent radionuclide has a much longer half-life than its progeny, and a sufficiently long time has elapsed for in-growth of the progeny such that all members or portions of a decay chain have approximately the same activity. Gaseous releases are limited to consideration of radon-222 plus in-growth of decay progeny. The dose to exposed individuals is calculated for comparison with requirements in 40 CFR 190 and 10 CFR Part 20.

MILDOS-AREA computes doses to nearby workers and the public located within 80 kilometers (km) resulting from natural background and mill sources. The model accounts for contaminated sources such as water, soil, and food that arise from the mill operations.

A sector-average Gaussian plume-dispersion model is assumed in the calculation of concentrations of radioactive materials from fixed-point sources. For area sources, either a virtual-point method or finite-element integration method is used. The latter method considers a composite of several point sources with distributed dispersion. For vertical-dispersion, either Briggs dispersion coefficients or Martin-Tickvart coefficients are used. Briggs dispersion coefficients are appropriate for tall sources such as a uranium mill stack, while the Martin-Tickvart coefficients are more appropriate for near-ground level sources such as ore piles and tailings piles.

### **6.1.1 MILDOS-AREA Input Parameters**

MILDOS-AREA allows the user to define and adjust several input parameters that contribute to the potential dose to on-site workers and the public. Shootaring's mill processes are the primary sources of radionuclide release. The method by which these releases disperse are influenced by wind speed and direction, particulate sizes, distance, food and water parameters. These physical parameters and receptor-related parameters are summarized in Table 6.1-1 and discussed separately in the following sections.

#### **Wind Characteristics**

A 6x6x16 matrix consisting of stability class, wind speed in miles per hour (mph), and the direction of the wind defines the annual average for wind characteristics. Each matrix entry signifies a percentage of the entire matrix and therefore the summation of all entries in the matrix is equal to one. The data used in the model were obtained in 1979-1980 and first presented in the 1996 renewal application (Plateau, 1996b). According to the American Meteorological Society, only small changes of averaged annual meteorological data can be expected. Thus, the meteorological data are assumed to represent current conditions.

#### **Population Data**

The primary purpose of the MILDOS-AREA model is to determine doses to an on-site worker and the public near the mill. Model results can be compared to associated regulatory limits. Populations are input within a 12 x 16 matrix consisting of distance and direction up to 80 km from radionuclide sources in the mill site. According to Shootaring's site manager, the populations of the surrounding areas are as follows: Ticaboo lies four km south of the site and contains 47 permanent residents. Upon operation of the mill, the population of Ticaboo is expected to increase to approximately 200, supplemented with mill workers and their accompaniments. Bullfrog, 22 km south of the facility, has 210 residents. Approximately 5 km farther south from Bullfrog, located on the opposite shore of Lake Powell, is Halls Crossing

**Table 6.1-1: MILDOS Model Parameters for Radiological Assessment**

	<b>Parameter</b>	<b>Value</b>
Ore	Ore quality, U <sub>3</sub> O <sub>8</sub>	0.15 percent <sup>a</sup>
	Ore Production Rate	3.65 x 10 <sup>5</sup> ton/yr <sup>g</sup>
Food Pathway Parameters	Fraction of year cattle graze locally	33 percent <sup>a</sup>
	Fraction of stored feed that is grown locally	less than 1 percent <sup>a</sup>
Area Food-Production rate	Vegetables	494 kg/yr-km <sup>2e</sup>
	Meat	106 kg/yr-km <sup>2e</sup>
	Milk	461 kg/yr-km <sup>2e</sup>
Wind and Population Data	Wind statistics	see Appendix A
	Population statistics	see Appendix A
Particle Size Distributions	Yellowcake dryer and packaging	3 um <sup>b</sup>
	Ore activity (crushers and grinders)	1.5 um <sup>b</sup>
	Ore pile and tailings 30 percent 70 percent	7.7 um <sup>b</sup> 54
Ore Handling and Storage	Maximum area of ore pad	14800 m <sup>2a</sup>
	Height of ore storage pile	3-8 m <sup>a</sup>
	Ore pad storage time	12 days <sup>a</sup>
	Nuclide release rates Uranium-238 Thorium-230 Radium-226 Lead-210 Radon-222	7.75 x 10 <sup>-3</sup> Ci/yr <sup>c</sup> 7.75 x 10 <sup>-3</sup> Ci/yr <sup>c</sup> 7.75 x 10 <sup>-3</sup> Ci/yr <sup>c</sup> 7.75 x 10 <sup>-3</sup> Ci/yr <sup>c</sup> 100.7 Ci/yr

**Table 6.1-1: MILDOS Model Parameters for Radiological Assessment(continued)**

Crushers, Grinders, Rod Mills, Ore Blending, Solvent Extraction, Countercurrent Decantation, Ion Exchange and Leaching	Estimated dust lost to atmosphere via ore transportation devices (dumping of ore)	0.768 MT/yr <sup>a</sup>
	Estimated area of dust release from ore dumping	900 m <sup>2</sup> <sup>f</sup>
	Nuclide release rates	
	Uranium-238	6.5 x 10 <sup>-4</sup> Ci/yr <sup>c</sup>
Thorium-230	6.5 x 10 <sup>-4</sup> Ci/yr	
Radium-226	6.5 x 10 <sup>-4</sup> Ci/yr	
Lead-210	6.5 x 10 <sup>-4</sup> Ci/yr	
Radon-222	25.17 Ci/yr <sup>a</sup>	
Yellowcake Drying and Packaging	Yellowcake production rate	2131.88 Kg/day <sup>g</sup>
	Stack height	27.43m <sup>a</sup>
	Fraction of yellowcake released to atmosphere	0.05 percent <sup>b</sup>
	Activity fractions	
Thorium	0.275 percent <sup>b</sup>	
Radium	0.25	
Others	0.5	
Solid and Tailings Disposal Cell 1	Tailings area	88,200 m <sup>2</sup> <sup>d</sup>
	Covered tailings flux	20 pCi/m <sup>2</sup> -s <sup>b</sup>
	Nuclide release rates	
	Uranium-238	0
Thorium-230	0	
Radium-226	0	
Lead-210	0	
Radon-222	55.6 Ci/yr <sup>a</sup>	

**Table 6.1-1: MILDOS Model Parameters for Radiological Assessment(concluded)**

Solid and Tailings Disposal Cell 2	Tailings area	156,600 m <sup>2</sup> <sup>d</sup>
	Uncovered-dry tailings flux	467 pCi/m <sup>2</sup> -s <sup>b</sup>
	Nuclide release rates	
	Uranium-238	2.175 x 10 <sup>-2</sup> Ci/yr <sup>b</sup>
	Thorium-230	3 x 10 <sup>-1</sup> Ci/yr
	Radium-226	3 x 10 <sup>-1</sup> Ci/yr
	Lead-210	3 x 10 <sup>-1</sup> Ci/yr
	Radon-222	2.306 x 10 <sup>3</sup> Ci/yr <sup>a</sup>

**Notes:**

Ci/yr = Curies per year; kg/yr-km<sup>2</sup> = kilograms per year per square kilometer; m = meters; m<sup>2</sup> = square meters; MT/day = Metric tons per day; MT/yr = Metric tons per year; pCi/m<sup>2</sup>-s = picoCuries per square meter per second; μm = micrometer

<sup>a</sup> Plateau, 1998b, Table 5.4-10

<sup>b</sup> NRC, 1980

<sup>c</sup> Woodward-Clyde, 1980. Table S2-F-1. Appendix S2-F

<sup>d</sup> Plateau, 2005

<sup>e</sup> Bureau of Census, <http://www.census.gov/>

<sup>f</sup> Based on estimated area of ore loading opening from topographical map.

<sup>g</sup> Plateau, 1996c

Marina with 94 residents. About 6 km south of Ticaboo is a small commercial area on the highway called Offshore, which contains 18 residents. Also within 80 km of the site are two small towns called Boulder and Hanksville at 69 km North West and 74 km North of the Shootaring mill. A Utah population table indicates that the populations of Boulder and Hanksville are approximately 180 and 250 (Bureau of Census, 2005). The Navajo Indian Reservation with a total population of 360, is located south of Halls Crossing on the other side of the Lake Powell. Also near the site are rural communities and secluded houses and farms, approximately 50 air miles northwest beyond Henry Mountain. These populations are based on a 1998 survey of the area and updated in 2005 (Bureau of Census, 2005).

**Food Production**

Grazing season occurs 33 percent of the year during which cattle graze on pasture land. Cattle eat stored feed during the off-grazing season with less than one percent of the stored feed grown locally. This information was obtained from the 1998 Renewal Application. The food production rate used in the model is Utah’s average productivity in 1984 and represents the distributed density throughout the state. This information is based on data from the U.S. Bureau of Census.

## Particle Sizes

The distances that particles travel are directly related to their size. MILDOS-AREA allows particulate sizes to be defined for ore and tailings piles, crushers and grinders, and yellowcake dryers. The particle size distributions used for the Shootaring model were obtained from the Final Generic Environmental Impact Statement on Uranium Mining and are consistent with recommendations of the International Commission on Radiological Protection (Users Guide, 1998).

## Source Parameters

The Shootaring uranium mill has four primary sources of radioactive emissions: an ore pile, ore crushers and grinders, yellowcake dryer, and tailings pile. Based on a topographical map of the mill facility, each source is defined and assigned input parameters to model the emissions (See MILDOS printout in Appendix A). The ore pile area and height were taken from the 1998 renewal application and represent maximum values. Radiological release estimates of lead-210, radium-226, thorium-230, and uranium-238 are based on an average of 0.25 percent  $U_3O_8$  content in the ore. Estimates of plant releases have been scaled by a factor of 1.67 to account for the planned increase in ore grade compared to that from the original Environmental Report (ER) for the Shootaring Mill (Woodward-Clyde, 1978c appendix S2-F). They are based on information provided by the architect-engineer for the project, using assumptions and methods described in the ER and in response to NRC questions on the

ER dated August 29, 1978. The radon release for the ore pile was calculated using the estimated ore production of 365 thousand tons per year and the following assumptions provided by the Final Generic Impact Statement on Uranium Mining: 20 percent of the radon is available for release from the mineral grains (yields an emanating fraction of 0.2), 90 percent of equilibrium will be reached within 12 days, and the particular activity for the ore is 280 pCi/g. This value was adjusted using ratios to account for the area and grade of the Shootaring ore pile.

Ore processing includes the following sources: crushers, grinders, rod mills, fine ore blending, solvent extraction, countercurrent decantation, ion exchange and leaching. Ore dust emissions are controlled by automatic water spray systems. Also, at the point of entry into the semi-autogenous (SAG) mill, a continuous flow of water is introduced along with the ore feed. Due to emission control equipment, the ore dump pocket emits negligible amounts of sulfuric acid mist and radon-222. The radon released to the atmosphere from all ore activity sources was taken from the 1998 renewal application, scaled to the proposed ore grade. Radiological release estimates of lead-210, radium-226, thorium-230, and uranium-238 were also adjusted to reflect the anticipated ore grade of 0.25 percent  $U_3O_8$ .

Yellowcake production was derived by scaling the production rate from the 1998 renewal application by the increase in ore grade. The Final Generic Environmental Impact Statement on Uranium Milling (NRC, 1980) suggests that, an average of 0.05 percent of uranium produced in mills escapes as particulates into the atmosphere. They also provide releases of radionuclides other than uranium isotopes based on reported values for in situ leach facilities. The activities of thorium-230 and radium-226 are 0.275 percent and 0.25 percent of uranium-238 activity where other activity fractions such as lead and polonium are 0.5 percent of the uranium-238 activity in the yellowcake.

The tailings pile is the primary source of radon and particulate emissions at the mill. Radiological release estimates of lead-210, radium-226, thorium-230, and uranium-238 are based on an average of 0.25 percent  $U_3O_8$  content in the ore. The tailings will consist of two cells: 21.8 acres (Cell 1) and 38.7 acres (Cell 2). In terms of radon and particulate emissions, the most conservative scenario for the tailings pile occurs when Cell 1 is full and radon barrier has been placed, and Cell 2 is full and dry (Hydro Engineering, 2005). Particle emissions from the covered tailings pile will be insignificant and the maximum radon flux expected from the covered tailings pile is 20 pCi/m<sup>2</sup>-s as required in 10 CFR 40, Appendix A. The flux from the uncovered cell is estimated at 466 pCi/m<sup>2</sup>s for dry uncovered conditions (NRC, 1980). Table 6.1-1 presents a summary of the model input parameters.

### **6.1.2 Assumptions and Uncertainty Analysis**

Uncertainty is inherent in the risk assessment process (EPA, 1989). It can result in both over- and under- estimations of risk. The interpretation of the acceptable dose should consider the implications of an uncertainty analysis and any assumptions presented in the model. The uncertainties in the estimation of dose relate to the characteristics of the receptors and the movement of the radionuclides. The uncertainties and assumptions related to these factors are described in the following paragraphs.

#### **Transport Analysis**

The MILDOS-AREA model accounts for dry deposition of particulates, re-suspension, radioactive decay and progeny in-growth, and plume reflection. Deposition buildup and in-growth of radioactive progeny are considered where surface concentrations are estimated (ORNL, 1996). In MILDOS-AREA, one can vary the emission rates of the sources as a function of time. This is used to model sources such as tailings piles, from which radon and particulate emissions increase over time. In the Shootar model, the most conservative scenario is posed: Cell 1 is full and covered with an interim cover to limit radon flux to 20 pCi/m<sup>2</sup>s, and Cell 2 is full with exposed bare tailings.

## Receptor and Off-Site Population Analysis

The primary exposure pathway for site workers and the public is external radiation from emissions at the site. This pathway is defined by the thickness of contamination, the amount of time a person is present, and the amount of shielding provided by structures. The thickness of the contamination is modeled based on source outputs.

Because the amount of time a person is present affects the dose, exposure frequency and duration for the receptors is considered. Residents within 80 km of the mill are assumed to be at home for the entire duration of the model year (365 days). On-site receptors are assumed to be at the mill 2000 hours per year and in Ticaboo for the remaining time. No shielding such as buildings, houses, or walls is assumed because some receptors are expected to remain outdoors for a large portion of the time.

### 6.1.3 MILDOS Model Results

The Shootaring MILDOS model uses the source input parameters as well as wind speeds and directions, population distribution, and food distribution parameters to calculate doses to workers and public near the mill. Residents within an 80-km radius of the mill and two on-site receptors are placed in the model for evaluation. During operation of the mill, not all of the Shootaring Mill workers will be radiation workers and will, therefore, have a more conservative radiation dose limit. Non-radiation workers may be located in the mill office east of the ore pile.

According to the results of the MILDOS model the office worker at the Shootaring site will receive an effective dose equivalent of 16 mrem/year, assuming that he/she is working at the site for 2,000 hours per year. While not working on the mill site, Shootaring workers will most likely live in the town of Ticaboo. The dose at Ticaboo was calculated as 3.7 mrem/year per person. The sum of doses to the office worker is  $16 + (6760/8760)*3.7 = 19$  mrem/yr. This total effective dose equivalent for the nearby non-radiation workers is 19 percent of the NRC limit for the public of 100 mrem/year given in 10 CFR 20, §20.1301. On-site radiation workers will be subject to the highest dose when working near the tailings pile. A receptor standing next to the tailings pile will have a 55 mrem/y total effective dose equivalent, assuming 2000 hours on site a year. The total dose of this worker, assuming he/she lives in Ticaboo, is 58 mrem/yr ( $55 + 3.7*(6760/8760)$ ). This is less than two percent of the 5000 mrem/yr allowable effective dose equivalent for a radiation worker (10 CFR 20, §20.1201).

Ticaboo residents account for the largest doses to the public since it is the closest town to the mill. The total effective dose to Ticaboo is 0.974 person-rem which is 3.7 millirem per year per person ( $0.974/260 = 3.7$ ). The total effective dose equivalent to the population within 80 km is 1.17 person-rem per year which corresponds to 0.76

mrem/yr per person (1544/1.17). Regional doses to populations beyond 80 km of the Shootaring mill site are negligible. Table 6.1-2 provides a summary of these results.

**Table 6.1-2: MILDOS Model Total Effective Dose Equivalent Results**

<b>Receptor/Location</b>	<b>Total Effective Dose Non-Radiation Worker</b>	<b>Total Effective Dose Radiation Worker</b>
Office Worker	19 mrem/yr <sup>a</sup>	-
Tailings Worker	-	58 mrem/yr <sup>a</sup>
Ticaboo Resident	3.7 mrem/yr <sup>b</sup>	-
Within 80km of site	0.76 mrem/yr <sup>d</sup>	-
Beyond 80km of site	Negligible <sup>c</sup>	-

**Notes:**

mrem/yr = milirem per year

<sup>a</sup> Assumes individual is at mill site for 2000 hours and in Ticaboo all remaining hours.

<sup>b</sup> Assumes resident is in Ticaboo 365 days out of the year.

<sup>c</sup> Values are low enough to be considered zero by the MILDOS Modeling program.

<sup>d</sup> Average effective dose per person based on total population within 80 km of site.

## **6.2 Environmental Effects of Accidents**

The radioactive materials handled at the mill have specific activities of 10<sup>-9</sup> Ci/g for the tailings, 10<sup>-9</sup> Ci/g for the ore, and 10<sup>-6</sup> Ci/g for the refined yellowcake product. Because of the low specific activities, releases of large quantities are required to produce significant human health and environmental impacts. Engineering controls generally limit the potential for large-scale releases even during accidents. Four categories of plant-related accidents involving radioactivity have been considered as well as releases of hazardous chemicals:

1. Trivial incidents.
2. Small releases to the environment.
3. Large release to the environment.
4. Transportation accidents.
5. Releases of hazardous chemicals

Trivial incidents include spills, ruptures in tanks or plant piping containing solutions or slurries, overfilling process tanks, and the rupture of a tailings pond retention system pipe in which the tailings slurry is released into the tailings facility. Small releases include failure of the air-cleaning system serving the concentrate drying and packaging area, or in the yellowcake drier. Large releases include a tornado dispersing materials from the mill buildings or tailings area.

In the 1998 license renewal application (Plateau, 1998b), a large release of tailings solution off site was considered. A recent design change calls for the separation of the liquid from the tailings slurry prior to placement of the tailings in the tailings cell. The liquids will be transferred to a lined storage/evaporation pond. The location of the pond is such that if a breach of the pond embankment occurred with a loss of liquid, the liquid would be contained in the tailings cell. Therefore, this potential accident has been eliminated from further consideration.

### **6.2.1 Trivial Incidents Involving Radioactivity**

The following accidents at the mill caused by human error or equipment failure should not result in the release of radioactive material to the environment.

#### **LEAKS OR RUPTURE IN TANKS OR PIPING**

Uranium-bearing slurries and solutions are contained in several tanks comprising the leach, washing, clarification, and precipitation stages of the mill circuit. Human error during the filling or emptying of tanks or the failure of valves or piping in the circuit might be expected to occur several times annually during normal operations. Large spills from tank failures or uncorrected human error might involve the release of several hundred pounds of uranium in the liquid phase to the mill floor. However, the entire content of each tank would be contained within the mill sumps and the spill retention dike and therefore should not reach the environment.

#### **RUPTURE OF PIPE IN THE TAILINGS DISPOSAL SYSTEM**

The maximum throughput of the mill is approximately 1000 tons of ore per day. Operating three shifts a day approximately 44 T (40 MT) per hour of sands, silt and clay-sized particles are transported to the tailings area through the tailings disposal system piping. This material is transported as a slurry (approximately 45% solids), which contains mill chemicals and radioactive materials. Within the tailings area, the liquids are then separated from the solids and pumped to the nearby evaporation pond. Occasional ruptures in the tailings slurry pipeline are expected to occur. A rupture would allow liquids to flow into the 18-inch diameter polyethylene half pipe supporting the slurry pipeline. The liquids would then flow by gravity to the tailings facility. Fresh water from the mill can then be used to flush any residual materials in the trough into the tailings facility. Should a design for separation of the tailings solution at the CCD circuit be feasible, the mitigation measures for controlling releases will be designed into the system.

### **6.2.2 Small Release Involving Radioactivity**

The following accidents, caused by human error or equipment failure, are likely to release small quantities of radioactive materials to the environment. The releases, however, are expected to be small in comparison with the annual release from normal operations.

### **AIR-CLEANING SYSTEM FAILURE IN THE YELLOWCAKE DRYING AREA**

The off-gases from the yellowcake drying operation, which contain entrained solid particles of yellowcake, pass through a wet scrubber which collects roughly 98% of the solid material, depending on particle size. Should the scrubber fail, excessive quantities of yellowcake could be released to the environment. The stack is routinely monitored for uranium and the circuit is checked approximately every four hours of operation. Under conditions of scrubber failure, drier operations would be terminated until the scrubber is repaired. Although quantitative data on failures of wet dust collectors are unavailable, a catastrophic scrubber failure is highly unlikely. Progressive failure, in which case the plugging of vents causes back pressure, would be readily detectable during operational checks and result in inefficiencies, rather than complete failure.

Drying and packaging operations will be terminated when controls are inoperative. When the checks indicate the equipment is not operating within the range prescribed for peak efficiency, actions shall be taken to restore parameters to the prescribed range. When this cannot be done without shutdown and repairs, drying and packaging operations shall cease as soon as practicable. Operations will not be restarted after cessation due to off-normal performance until needed corrective actions have been identified and implemented. All such cessation's, corrective actions, and restarts shall be reported to the State of Utah Bureau of Radiation Protection in writing within 10 days of the subsequent restart.

### **GAS EXPLOSION IN THE YELLOWCAKE DRYING OPERATION**

A diesel-fuel-fired furnace is used to remove the water remaining in the yellowcake slurry after the filter wash operation. The furnace consists of several hearths enclosed within a large cylinder. The off-gas from the drier is vented through a wet scrubber. An explosion in the drier or the fuel piping, however, could blow off the duct work associated with the ventilation system and disperse yellowcake into the mill work space.

The consequences of explosion accidents are limited by the concentration of heavy material that can be maintained in the air, estimated to be approximately 100 mg/m<sup>3</sup>. For a room with a volume on the order of 10<sup>4</sup> m<sup>3</sup>, the quantity of yellowcake released to the room air is estimated to be approximately 1000g. Based on the conservative assumptions that (1) all of the material would be swept out into the environment when the room is ventilated and (2) that 100% of the insoluble particles are in the respirable size range, the office receptor would receive an effective dose equivalent of 0.3 mrem. The above calculation was made using MILDOS-AREA by adjusting the release to occur over a one-year period, the average wind speed and class directed toward the office worker receptor location, and occupancy of the receptor was 100 percent.

If such an event were to occur, downwind unrestricted areas would be surveyed for excess alpha activity. Contaminated soils could be removed and recycled through the mill circuit or disposed of in the tailings facility, thereby minimizing any long-term environmental impact.

### **6.2.3 Large Release Involving Radioactivity**

There is only one conceivable accident that could release large quantities of radioactive materials to the environment resulting in significant environmental and health impacts. This hypothetical accident assumes that a tornado strikes the yellowcake processing area.

High winds, thunderstorms and dust devils are frequent in spring and summer and may occasionally cause slight damage in their paths. Although tornadoes are an infrequent occurrence and tend to be less destructive than those appearing further east, their maximum probable impact has been estimated. In a typical tornado, the wind speed approximates 240 mph, of which approximately 190 mph is rotational and 50 mph is translational. The mill structures are not designed to withstand a tornado of this intensity.

The nature of the milling operation is such that little could be done to secure the facility even with advance tornado warning. It is not possible to accurately predict the release during such an event. A conservative approach was adopted where it is assumed that two days' production of yellowcake is in the process piping (2480 kg) and will be released. In addition, it is assumed that 48 drums containing 16 MT (18 T) of yellowcake are onsite when the tornado strikes; and that all of the unpackaged and 15% of the containerized material is released. Thus, the tornado is assumed to cause about 4880 kg (10736 lb) of yellowcake (equivalent to the contents of fourteen 55-gallon drums) to become airborne.

MILDOS-AREA is designed to calculate the dose to receptors from a constant release from the site over a one year period. For dispersion analysis from a single release, the input parameters were adjusted to distribute the release from the tornado over a year, assuming a constant but conservative wind direction and speed. The average annual wind speed was directed into a 45 degree cone to the south toward Ticaboo. Using the above assumptions, the total effective dose commitment to a Ticaboo resident was calculated to be 38 mrem.

### **6.2.4 Transportation Accidents**

Transportation of materials to and from the mill can be classified into three categories:

1. Shipments of refined yellowcake from the mill,
2. Shipments of ore from the mine to the mill, and
3. Shipments of process chemicals from suppliers to the mill. An accident in each of these categories has been considered.

#### **SHIPMENTS OF YELLOWCAKE**

The refined yellowcake product is placed in 55-gallon drums holding an average of 750 lb and classified by the Department of Transportation as Type A packaging (49 CFR Parts 171-189 and 10 CFR Part 71). We have assumed that the yellowcake will be shipped 2400 km (1500 miles) by truck to the conversion plant in Metropolis, IL. The average

truck shipment contains approximately 48 drums, or 36,000 pounds of yellowcake. Based upon the current mill capacity, 1.7 million pounds of yellowcake annually, approximately 46 such shipments will be required annually. Published accident statistics set the probability of a vehicle accident at approximately  $1.4 \times 10^{-6}/\text{km}$  (DOT, 2003).

The annual probability of a vehicle accident while transporting the yellowcake to the conversion plant is 0.15, or one accident in about 7 years. Using the method proposed in (NRC, 1980), a wind speed of 5 m/s, and a release time of 24 hours, the environmental release fraction is 0.009. Assuming all uranium particles are in the respirable size range and a population density of 7.5 persons per square mile, the 50-year collective dose commitment to the lungs of the nearby general population was calculated to be 0.7 manrems.

The assumptions in the calculations are conservative since the spilled yellowcake would be cleaned up as rapidly as possible to prevent spread of the contamination.

#### **SHIPMENTS OF ORE TO THE MILL**

While all sources of uranium ore to be milled have not been identified, it is assumed that ore will be hauled in trucks an average of 161 km (100 miles), the sources ranging from local mines as well as from mines as far away as Moab, UT, which is approximately 290 km miles. A conservative estimate (NRC, 1980) of the respirable fraction of ore dust in a truck is 0.01. If 25 ton trucks are used, 13,240 trucks per year will be required to supply the mill at full capacity of 331,000 tons per year. Using the accident rate from above and 100 miles per trip, three accidents are predicted per year. It should be noted that the NRC, 1980 predicts that 55 percent of these accidents will be minor accidents with no release.

It is estimated (NRC, 1980) that only 1 percent of the ore is in the respirable range. Applying the same 0.009 release fraction, the average respirable quantity to be released in an accident is only 2.04 kg (4.5 lb). Since the specific activity of the ore is three orders of magnitude less than that of yellowcake, it is obvious that the radiological exposure to this release is very small. Therefore it is easy to conclude that the radiological impact of ore transport is considered insignificant.

#### **SHIPMENTS OF CHEMICALS TO THE MILL**

The most serious trucking accident involving the transportation of chemical to the mill would most likely involve the shipment of anhydrous ammonia. The probability of a truck accident is  $1.4 \times 10^{-6}/\text{km}$ , but not all of those predicted accidents would release ammonia. If, however, large amounts of ammonia were released, human lives could be endangered.

### **6.2.5 Releases of Hazardous Chemicals**

The potential environmental effects from accidents involving nonradiological material is expected to be small. Ducting and ventilation systems in the solvent extraction and precipitation areas are designed to vent and dilute the chemical vapors emitted and protect the workers from hazardous fumes. Failure of these ventilation systems may result in the

short-term collection of these vapors in the building air. Since the vapors would ultimately be discharged to the atmosphere in either case, such a failure would have no incremental effect on the environment.

A number of chemical reagents used in the process are expected to be stored in relatively large quantities at the mill site. Specifically, storage tanks are provided for such materials as sulfuric acid, ammonia, and sodium chlorate. If an overflow or rupture were to occur, drainage of the liquid reagents would be contained in the mill sumps and the spill containment dikes.

The only chemical which may seriously impact the environment is ammonia. This event was assessed in Plateau's original application (Plateau, 1996c). A break in the ammonia storage tank's external piping would result in only a minor release. The line carrying ammonia to the storage tank from the tank truck could rupture, in which case the release rate is assumed to be limited to 0.2 lbs (100 g/s) of vapor. This would be released outside of the building. The truck delivery person would be trained to respond by avoiding the plume and advising nearby personnel to clear the area until the cloud disperses. The resulting concentration of ammonia at 2000 m was conservatively estimated to average approximately 35 mg/m<sup>3</sup> over the release period. Published information on ammonia (Texas, 2003) indicates that odors are readily detectable at concentrations between 20-50 ppm and that levels in the range of 150-200 ppm have a visible cloud with general discomfort and tearing for humans, normally with no lasting effect with short-term exposure. The most restrictive time-weighted average limit for workers exposure is given as 17 mg/m<sup>3</sup> by the American Conference of Government Industrial Hygienists. Since the exposure duration would be expected to be short compared to exposure in the work place, no significant off-site impact should result

## **7. Evaluation of Alternatives**

The Selected Alternative is to amend the license to allow operation of the uranium mill to process 0.25 percent ore as presented in Sections 3 and 4 and to allow the addition of a vanadium extraction circuit. This does not preclude continuing in the standby mode until the resources are obtained and the modifications made to the existing mill that are necessary to begin processing the uranium ore.

The Second Alternative, while less desirable, is to process ore under the original license conditions (Plateau, 1996b) where the ore grade averaged 0.15 percent uranium. No vanadium extraction circuit would be added.

The No Action alternative is to continue under the current approved license. Should the request for an operating license be denied, Plateau Resources will proceed to decommission the mill and reclaim the tailings facility.

### ***7.1 Unavoidable Adverse Environmental Impacts***

Unavoidable adverse environmental impacts associated with operating the mill includes the release of small quantities of radionuclides, diesel exhaust from operating the electrical generator, and vehicle exhaust from workers going to and from work. In addition, current employees and additional mill workers hired to support the operations will be exposed to direct radiation as well as airborne radionuclides.

The incidence of occupational safety accidents and the severity of the accidents are expected to be similar to those at other operating mills. Other sources for accidents arise from vehicular travel to and from the site. Site workers will normally drive from nearby Ticaboo or from the Hanksville area. In addition, it is estimated that an average of 40 ore trucks per day will be received at the site creating additional traffic on Highways 24, 95, and 276.

Tailings facility design for the Selected Alternative has improved significantly compared to the Second Alternative (original design). The tailings will be dewatered and the water will be recycled or evaporated in a lined evaporation pond. The original design disposed of the tailings and tailings liquids in the lined disposal cell. While the cell was designed to contain the liquid, the potential for liquid releases to the environment has been significantly reduced by placing only relatively low moisture tailings in the disposal cell.

The Selected Alternative and the Second Alternative will create a higher number of industrial accidents and total radiation exposure than the No Action Alternative since

the number of employees will be greater and the exposure period much longer. The selected alternative will create a slightly higher radiation exposure than operating the mill under the Second Alternative operating parameters.

## ***7.2 Irreversible and Irretrievable Commitments of Resources***

The Selected and Second Alternatives require significant energy and water consumption. Diesel generators are used to supply electrical power to the site. Diesel power levels and thus diesel fuel consumption would be significantly less for the No Action Alternative, especially over the long term. Also industrial chemicals are consumed in the milling process.

## ***7.3 Relationship between Local and Short-Term Uses of the Environment and the Maintenance of Long-Term Productivity***

Several construction projects will be required to prepare for the Selected Alternative including adding the vanadium circuit, restoring previously removed mill process components and laboratory equipment, and constructing the cell and solution storage/evaporation pond. Upon approval of the Selected Alternative, additional personnel will be hired to supplement the small staff currently at the site. Upon starting the mill, these staff will be trained to support the mill operations. This is expected to provide stable long-term employment opportunities for area residents in an area that has and is currently experiencing the highest unemployment rate in Utah.

## ***7.4 Socioeconomic Impacts***

Implementation of the Selected Alternative will require a total staff of approximately 70 at the site for the foreseeable future. In the near term, construction personnel will be imported and require temporary housing. Anticipated annual expenditure for personnel and other site operations is approximately \$8 million in year 2005 dollars. This is expected to have a significant positive effect on the local area.

If the Selected Alternative or Second Alternative are not approved, the No Action Alternative is to proceed with the decommissioning. The site staff will be increased to approximately 20 for the duration of the decommissioning, creating a positive short-term economic impact on the local area.

## **7.5 Cost-Benefit Balance of Environmental Action and Alternatives**

The cost-benefit balance of the Selected Alternative and Second Alternative is very similar with the exception that yellowcake production will be higher with higher grade ore and the recovery of vanadium from the tailings renders the tailings less hazardous and results in a useful product. Should an increase in grade ore not be allowed, additional low grade ore will have to be transported to the site to mix with the higher grade ore, creating greater transportation-related impacts and unfavorably changing the break-even economics of uranium processing. Under the No Action Alternative, there is a long-term local environmental benefit from closing the mill and reclaiming the tailings. This is, however, off-set by depriving the nuclear power industry of much-needed uranium for fuel and a permanent loss of high paying jobs for the area.

## 8. References

American Meteorological Society, <http://www.ametsoc.org/>

ANL, 1998. MILDOSE-AREA User's Guide, 1998, Environmental Assessment Division, Argonne National Laboratory, Argonne, IL.

DOC, undated. Final Environmental Impact Statement, Kaiparowits. U. S. Department of Commerce, Washington, D.C.

DOT, 2003. Traffic Safety Facts 2003:U.S. Department of Transportation, Washington, D.C.

Hershfield, 1961. "Rainfall Frequency Atlas of the United States from Durations from 30 minutes to 24 Hours and Return Periods from 1 to 100 years. D.M. Hershfield, 1961, Technical Paper 40. U.S. Weather Bureau.

Hydro-Engineering, 1998. Ground-Water Hydrology of the Shootaring Tailings Site. August 28, 1998. Prepared by Hydro-Engineering, L.L.C., 4685 East Magnolia, Casper, WY 82604.

Hydro-Engineering, 2005 "Tailings Reclamation and Decommissioning Plan for Shootaring Canyon Uranium Project," December 2005. Prepared by Hydro-Engineering, 4685 East Magnolia, Casper, WY 82604 and Environmental Restoration Group, Inc., 8809 Washington NE, Albuquerque, NM 87113.

Miller, 1964. "Two- to Ten-Day Precipitation for Return Periods of 2 to 100 Years in the Contiguous United States." J.F. Miller, 1964. Technical Paper 49. U.S. Weather Bureau.

No. SUA-1371, NRC Docket No. 40-8698, March 1, 1996. Plateau Resources Limited, Shootaring Canyon Uranium Mill, Garfield County, Utah.

NRC, 1979. Regulatory Guide 3.8, Preparation of Environmental Reports for Uranium Mills. U. S. Nuclear Regulatory Commission, Washington, DC 20555,

NRC, 1980. NUREG-0706. "Final Generic Environmental Impact Statement on Uranium Milling," 1980. Office of Nuclear Material Safety and Safeguards, U. S. Nuclear Regulatory Commission, Washington, DC 20555.

ORNL, 1996. MILDOS-AREA RSIC Computer Code Collection, Oak Ridge National Laboratory, Oak Ridge, TN 1996.

ORNL, 1998. "MILDOSE-AREA Calculation of Radiation Dose from Uranium Recovery Operations for Large-Area Sources." RSIC Computer Code Collection, Contributed by Argonne National Laboratory, Argonne, Illinois. September 1998. Oak Ridge National Laboratory, Oak Ridge, TN.

Plateau 1996a. Shootaring Canyon Uranium Processing Facility Decommissioning & Reclamation Plan, December 1996, Plateau Resources, Ltd. 877 North 8<sup>th</sup> West, Riverton, WY 82501.

Plateau, 1996b. Plateau Resources Limited, Source Material License

Plateau, 1997. Environmental Assessment for Renewal of Source Material License No. SUA-1371. April 1997, Plateau Resources Limited, Shootaring Canyon Uranium Mill, Garfield County, Utah.

Plateau, 1998a. Tailings Cover Infiltration Modeling for the Shootaring Canyon Uranium Processing Facility, September 1998, Prepared for Plateau Resources Limited by Hydro-Engineering, L.L.C., 4685 East Magnolia, Casper, WY 82604

Plateau, 1998b. Renewal of License for Operating the Shootaring Mill", Source Material License\SUA-1371\NRC Docket No. 40-8698, March 1, 1998. Prepared by Plateau Resources, Ltd., 877 North 8<sup>th</sup> West, Riverton, WY 82501.

Plateau, 1998c. Ground-Water Hydrology of the Shootaring Tailings Site. August 28, 1998. Prepared for Plateau Resources, Ltd. by Hydro-Engineering, L.L.C., 4685 East Magnolia, Casper, WY 82604.

Plateau, 2005. "Tailings Management Plan for Shootaring Canyon Uranium Processing Facility (Amended December 2005)." Prepared by Plateau Resources, Ltd., 877 North 8<sup>th</sup> West, Riverton, WY 82501 and Hydro-Engineering, 4685 East Magnolia, Casper, WY 82604.

Texas, 2003 "Ammonia Facts," December 30, 2003, Prepared by Texas Department of Health, Austin, TX 78756.

U.S. Bureau of Census, 2004. Utah Population Chart,  
<http://www.census.gov/popest/cities/tables/SUB-EST2003-04-49.pdf>

Woodward-Clyde, 1978a. June 16, 1980 revision. Environmental Report, Shootaring Canyon Uranium Project Garfield County. Prepared for Plateau Resources Limited by Woodward-Clyde Consultants.

Woodward-Clyde Consultants, 1978b. June 1978. Supplement S1 Environmental Report, Shootaring Canyon Uranium Project, Garfield County, Utah. Prepared for Plateau Resources Limited.

Woodward-Clyde Consultants, 1978c. September 1978. Supplement S2 Environmental Report, Shootaring Canyon Uranium Project, Garfield County, Utah. Prepared for Plateau Resources Limited.

Woodward Clyde, 1984. Summary of Ground Water Conditions in the Vicinity of Plateau Resources Limited, Shootaring Canyon Mill Site near Ticaboo, Utah, Woodward-Clyde Associates.

## **Appendix A MILDOS Model Output**

TABLE OF CONTENTS  
AAAAAAAAAAAAAAAAAAAA

METEOROLOGICAL DATA .....	2
INDIVIDUAL RECEPTORS & MISCELLANEOUS INPUT DATA .....	3
POPULATION DISTRIBUTION .....	4
SOURCE PARAMETERS .....	5
DOSE CONVERSION FACTORS .....	6
TIME STEP 1,	
CONCENTRATION DATA FOR SPATIAL INTERVALS .....	11
ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR	
INHALATION PATHWAY .....	16
GROUND PATHWAY .....	20
CLOUD PATHWAY .....	21
VEGETATION INGESTION PATHWAY .....	22
MEAT INGESTION PATHWAY .....	24
MILK INGESTION PATHWAY .....	26
POPULATION DOSE SUMMARY .....	28
INDIVIDUAL RECEPTOR PARTICULATE CONCENTRATIONS .....	29
INDIVIDUAL RECEPTOR RADON AND RADON DAUGHTER CONCENTRATIONS .....	30
INDIVIDUAL RECEPTOR ALC CHECK AND/OR ANNUAL DOSE COMMITMENTS .....	31

REGION: Shootar		CODE: MILDOS-AREA (02/97)									PAGE 2							
METSET:		DATA: SITE1.MIL									01/03/06		FREQWS=0.46168,0.24952,0.18826,0.08505,0.01697,0.00743					
JOINT FREQUENCY IN PERCENT,		DIRECTION INDICATES WHERE WIND IS FROM																
MPH	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTALS	
-----																		
STABILITY CLASS 1																		
1.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0300	0.0000	0.0600	0.0000	0.0000	0.0000	0.0000	0.1200	
5.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0600	0.0300	0.0300	0.0000	0.0000	0.0000	0.1500	
10.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0600	0.0900	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1800	
15.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
ALL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0900	0.1500	0.0600	0.0900	0.0300	0.0000	0.0000	0.0000	0.4500	
-----																		
STABILITY CLASS 2																		
1.5	0.1790	0.0600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.5370	0.7460	0.7750	0.8050	0.4470	0.1190	0.0600	0.1790	3.9370	
5.5	0.2390	0.1190	0.0000	0.0000	0.0300	0.0600	0.0600	0.1490	1.1330	1.5810	0.3880	0.5370	0.2680	0.0900	0.0000	0.1790	4.8330	
10.0	0.0900	0.0900	0.0300	0.0000	0.0000	0.0000	0.0000	0.0300	1.0440	0.8650	0.2980	0.2390	0.4770	0.0900	0.0290	0.0300	3.3120	
15.5	0.0000	0.0000	0.0900	0.0600	0.0000	0.0000	0.0000	0.0000	0.0300	0.2390	0.0600	0.0900	0.0600	0.0300	0.0600	0.0000	0.7190	
21.5	0.0300	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0300	
ALL	0.5380	0.2690	0.1200	0.0600	0.0300	0.0600	0.0600	0.2090	2.7440	3.4310	1.5210	1.6710	1.2520	0.3290	0.1490	0.4180	12.8610	
-----																		
STABILITY CLASS 3																		
1.5	0.1810	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0600	0.6020	0.7530	0.4220	0.3310	0.3610	0.0900	0.1210	0.0900	3.0410	
5.5	0.0900	0.0300	0.0000	0.0000	0.0000	0.0000	0.0300	0.0600	0.8950	0.8650	0.2390	0.1490	0.1790	0.0600	0.0000	0.0600	2.6570	
10.0	0.1190	0.0300	0.1190	0.0000	0.0600	0.0000	0.0000	0.0600	0.4770	1.0740	0.5070	0.2390	0.2390	0.0000	0.1190	0.0600	3.1030	
15.5	0.0300	0.0600	0.0300	0.0900	0.0300	0.0000	0.0000	0.0000	0.0900	0.5670	0.3880	0.1490	0.0900	0.0300	0.0000	0.0300	1.5840	
21.5	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0300	
28.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
ALL	0.4200	0.1200	0.1490	0.0900	0.0900	0.0000	0.0600	0.1800	2.0640	3.2590	1.5560	0.8680	0.8690	0.1800	0.2400	0.2700	10.4150	
-----																		
STABILITY CLASS 4																		
1.5	1.6100	1.7040	0.5080	0.8070	1.0760	0.5080	0.4180	1.0460	1.4650	1.2250	0.5680	0.7170	1.5240	0.3890	0.1790	0.4480	14.1920	
5.5	1.3400	0.8050	0.0600	0.0900	0.1120	0.0900	0.0600	0.9540	2.3860	0.9840	0.3880	0.1790	0.3280	0.1490	0.0600	0.2980	8.2830	
10.0	0.7750	0.4770	0.4180	0.0600	0.0900	0.0030	0.0300	0.3880	2.2370	0.8350	0.4180	0.3880	0.6860	0.0600	0.0300	0.2090	7.1040	
15.5	0.0600	0.2390	0.4180	0.1790	0.0000	0.0000	0.0000	0.0600	0.2090	0.6860	0.4470	0.2680	0.3280	0.1190	0.1190	0.1450	3.2770	
21.5	0.0300	0.0000	0.0600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0900	0.0300	0.0300	0.0000	0.0300	0.0300	0.0900	0.3900	
28.0	0.0000	0.0600	0.0300	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0300	0.0600	0.0900	0.3000	
ALL	3.8150	3.2850	1.4940	1.1360	1.2780	0.6010	0.5080	2.4480	6.2970	3.8200	1.8510	1.5820	2.8960	0.7770	0.4780	1.2800	33.5460	
-----																		
STABILITY CLASS 5																		
1.5	1.8500	2.3860	0.7750	0.5970	1.1630	0.7160	0.3280	0.6860	1.3720	0.7460	0.1790	0.4480	0.9540	0.3280	0.0000	0.6560	13.1840	
5.5	0.7750	0.4770	0.1790	0.0300	0.0000	0.0230	0.1190	0.5970	0.8350	0.1790	0.0900	0.0900	0.1780	0.0300	0.0300	0.2090	3.8410	
10.0	0.2680	0.2090	0.2390	0.1490	0.0900	0.0300	0.0900	0.2980	1.1630	0.3280	0.0230	0.1490	0.1190	0.0000	0.0000	0.1790	3.3340	
15.5	0.2980	0.2980	0.6560	0.2680	0.0300	0.0300	0.0000	0.0000	0.2980	0.1490	0.0600	0.0600	0.0600	0.0000	0.0300	0.0300	2.2670	
21.5	0.0300	0.0000	0.5070	0.1190	0.0000	0.0600	0.0000	0.0000	0.0900	0.0300	0.0300	0.0000	0.0000	0.0000	0.0000	0.0000	0.8660	
28.0	0.0000	0.0000	0.0600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0600	0.0000	0.0900	0.0900	0.0000	0.0000	0.0000	0.3000	
ALL	3.2210	3.3700	2.4160	1.1630	1.2830	0.8590	0.5370	1.5810	3.7580	1.4920	0.3820	0.8370	1.4010	0.3580	0.0600	1.0740	23.7920	
-----																		
STABILITY CLASS 6																		
1.5	2.0000	1.5810	0.5070	0.6560	0.9840	0.1490	0.4180	0.5670	0.8950	0.7160	0.2680	0.7460	0.8950	0.5070	0.1490	0.6560	11.6940	
5.5	1.2200	0.9250	0.2980	0.0600	0.9250	0.1190	0.1790	0.3580	0.3570	0.2390	0.0600	0.0890	0.2090	0.0600	0.0300	0.0600	5.1880	
10.0	0.3880	0.1490	0.1490	0.1190	0.0300	0.0000	0.0600	0.2980	0.3280	0.0900	0.0300	0.0300	0.0000	0.0890	0.0000	0.0330	1.7930	
15.5	0.0600	0.1490	0.1790	0.0300	0.0000	0.0000	0.0300	0.0600	0.0900	0.0600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.6580	
21.5	0.0000	0.0300	0.0890	0.0000	0.0000	0.0000	0.0000	0.0000	0.0230	0.0000	0.0000	0.0000	0.0000	0.0000	0.0600	0.1790	0.3810	
28.0	0.0000	0.0300	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0300	0.0000	0.0300	0.0000	0.0000	0.0000	0.0230	0.1130	
ALL	3.6680	2.8640	1.2220	0.8650	1.9390	0.2680	0.6870	1.2830	1.6930	1.1350	0.3580	0.8950	1.1040	0.6560	0.2390	0.9510	19.8270	
-----																		
ALL	11.6620	9.9080	5.4010	3.3140	4.6200	1.7880	1.8520	5.7310	16.6460	13.2870	5.7280	5.9430	7.5520	2.3000	1.1660	3.9930	100.8910	

-----INDIVIDUAL RECEPTOR LOCATION DATA, 2 LOCATIONS INPUT THIS RUN-----

I	LOCATION NAMES	X(KM)	Y(KM)	Z(M)	DIST(KM)	TYPE	I	LOCATION NAMES	X(KM)	Y(KM)	Z(M)	DIST(KM)	TYPE
1	Office Worker	0.13	0.17	0.00	0.21	1	2	Tailings Worker	-0.28	0.22	0.00	0.36	1

-----

MISCELLANEOUS INPUTABLE PARAMETER VALUES

DMM	DMA	TSTART	FFORI	FHAYI	FFORP	FHAYP	FPR(1)	FPR(2)	FPR(3)	ACTRAT
100.0	100.0	2005.00	0.30	0.70	0.30	0.70	494.00	106.00	461.00	2.50

-----

IPACT EQUALS 0, 0, 0, 0, 0,

JC EQUALS 1, 0, 1, 1, 0, 1, 1, 0, 1, 0

TIME STEP DATA.... STEP NAMES LENGTH, YRS IFTODO  
1 5.00 1

XRHO EQUALS 1.5, 2.5, 3.5, 4.5, 7.5, 15.0, 25.0, 35.0, 45.0, 55.0, 65.0, 75.0,

HDP EQUALS 50.0

POPULATION DISTRIBUTION

KILOMETERS	N 0.0	NNE 22.5	NE 45.0	ENE 67.5	E 90.0	ESE 112.5	SE 135.0	SSE 157.5	S 180.0	SSW 202.5	SW 225.0	WSW 247.5	W 270.0	WNW 292.5	NW 315.0	NNW 337.5
1.0- 2.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2.0- 3.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.0- 4.0	0	0	0	0	0	0	0	0	260	0	0	0	0	0	0	0
4.0- 5.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5.0-10.0	0	0	0	0	0	0	0	0	18	0	0	0	0	0	0	0
10.0-20.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
20.0-30.0	2	0	0	0	0	0	0	0	304	0	0	0	0	0	0	0
30.0-40.0	0	0	21	0	2	0	0	0	0	0	0	0	0	0	0	0
40.0-50.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4	0
50.0-60.0	4	0	0	0	0	0	0	0	0	0	0	0	0	0	8	0
60.0-70.0	0	0	0	0	8	1	0	0	60	0	0	0	0	180	2	3
70.0-80.0	250	2	0	0	0	0	0	0	360	0	0	0	0	10	0	45
1.0-80.0	256	2	21	0	10	1	0	0	1002	0	0	0	0	190	14	48

TOTAL 1-80 KM POPULATION IS 1544 PERSONS



## INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF INFANT

AMAD= 1.5 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	3.42E+03	3.85E+03	4.68E+03	6.49E+02	1.74E+02	4.10E+00	8.80E+02
BONE	4.84E+01	5.41E+01	2.17E+04	5.92E+02	5.47E+02	7.03E-02	2.10E+02
AVG.LUNG	2.69E+04	3.08E+04	3.10E+04	4.17E+03	5.07E+01	5.96E+01	3.36E+03
LIVER	3.51E-01	3.23E-01	1.16E+02	4.42E+01	2.83E+03	1.32E+00	2.54E+02
KIDNEY	4.67E+01	5.23E+01	1.21E+01	1.68E+01	1.08E+03	3.48E+01	1.32E+03
AMAD= 3.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	2.08E+03	2.33E+03	3.05E+03	4.63E+02	1.90E+02	3.25E+00	7.26E+02
BONE	3.56E+01	3.98E+01	1.57E+04	6.64E+02	5.94E+02	8.98E-02	2.37E+02
AVG.LUNG	1.70E+04	1.94E+04	1.96E+04	2.63E+03	5.51E+01	3.77E+01	2.12E+03
LIVER	2.48E-01	2.38E-01	8.41E+01	4.95E+01	3.08E+03	1.69E+00	2.88E+02
KIDNEY	3.44E+01	3.86E+01	8.73E+00	1.88E+01	1.16E+03	4.13E+01	1.49E+03
AMAD= 5.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.45E+03	1.62E+03	2.23E+03	3.49E+02	2.21E+02	3.11E+00	7.99E+02
BONE	4.32E+01	4.83E+01	1.45E+04	7.96E+02	7.15E+02	1.17E-01	2.85E+02
AVG.LUNG	1.14E+04	1.28E+04	1.29E+04	1.73E+03	6.40E+01	2.71E+01	1.40E+03
LIVER	2.90E-01	2.96E-01	9.28E+01	6.05E+01	3.56E+03	2.11E+00	3.34E+02
KIDNEY	4.45E+01	5.05E+01	9.45E+00	2.38E+01	1.34E+03	5.00E+01	1.75E+03
AMAD=54.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	2.49E+00	2.74E+00	5.25E+02	1.45E+02	2.17E+02	1.82E+00	4.98E+02
BONE	2.04E+01	2.28E+01	6.11E+03	7.79E+02	7.13E+02	1.40E-01	2.66E+02
AVG.LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.38E+01	0.00E+00	0.00E+00
LIVER	1.09E-01	1.40E-01	3.92E+01	5.93E+01	3.55E+03	2.53E+00	3.12E+02
KIDNEY	2.10E+01	2.38E+01	3.99E+00	2.34E+01	1.32E+03	4.75E+01	1.64E+03
AMAD= 0.3 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	6.97E+03	7.81E+03	9.06E+03	1.18E+03	1.75E+02	6.52E+00	1.30E+03
BONE	8.37E+01	9.35E+01	4.21E+04	5.42E+02	5.39E+02	4.04E-02	1.75E+02
AVG.LUNG	5.84E+04	6.67E+04	6.73E+04	9.03E+03	5.00E+01	1.21E+02	7.29E+03
LIVER	6.15E-01	5.35E-01	2.06E+02	3.04E+01	2.80E+03	1.62E-01	1.98E+02
KIDNEY	7.63E+01	8.55E+01	2.12E+01	1.43E+01	1.09E+03	2.51E+01	1.10E+03

## INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF CHILD

AMAD= 1.5 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.64E+03	1.84E+03	2.58E+03	1.62E+02	8.37E+01	1.97E+00	2.05E+02
BONE	3.23E+01	3.60E+01	1.91E+04	1.86E+02	4.00E+02	5.14E-02	2.27E+01
AVG.LUNG	1.32E+04	1.47E+04	1.49E+04	1.18E+03	2.30E+01	2.70E+01	9.53E+02
LIVER	1.62E-01	1.46E-01	6.50E+01	9.12E+00	1.18E+03	5.53E-01	6.00E+01
KIDNEY	2.04E+01	2.29E+01	7.00E+00	4.42E+00	4.98E+02	1.61E+01	3.19E+02
AMAD= 3.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	9.97E+02	1.12E+03	1.68E+03	1.16E+02	9.11E+01	1.56E+00	1.69E+02
BONE	2.38E+01	2.66E+01	1.38E+04	2.09E+02	4.35E+02	6.57E-02	2.57E+01
AVG.LUNG	8.32E+03	9.31E+03	9.39E+03	7.45E+02	2.50E+01	1.71E+01	6.01E+02
LIVER	1.14E-01	1.08E-01	4.70E+01	1.02E+01	1.29E+03	7.07E-01	6.78E+01
KIDNEY	1.51E+01	1.69E+01	5.07E+00	4.95E+00	5.37E+02	1.91E+01	3.61E+02
AMAD= 5.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	6.93E+02	7.76E+02	1.19E+03	7.60E+01	1.06E+02	1.50E+00	1.64E+02
BONE	1.76E+01	1.81E+01	1.09E+04	2.31E+02	4.68E+02	7.65E-02	2.85E+01
AVG.LUNG	5.48E+03	6.12E+03	6.18E+03	4.90E+02	2.65E+01	1.12E+01	3.96E+02
LIVER	9.81E-02	9.64E-02	4.06E+01	1.17E+01	1.41E+03	8.40E-01	7.56E+01
KIDNEY	1.37E+01	1.54E+01	4.40E+00	5.70E+00	5.90E+02	2.20E+01	4.04E+02
AMAD=54.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.19E+00	1.31E+00	2.81E+02	3.15E+01	1.04E+02	8.77E-01	1.02E+02
BONE	8.28E+00	8.54E+00	4.61E+03	2.26E+02	4.67E+02	9.15E-02	2.66E+01
AVG.LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.64E+01	0.00E+00	0.00E+00
LIVER	3.67E-02	4.54E-02	1.71E+01	1.15E+01	1.41E+03	1.00E+00	7.07E+01
KIDNEY	6.46E+00	7.24E+00	1.86E+00	5.58E+00	5.82E+02	2.09E+01	3.78E+02
AMAD= 0.3 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	3.34E+03	3.74E+03	5.00E+03	3.06E+02	8.76E+01	3.26E+00	3.24E+02
BONE	6.17E+01	6.89E+01	3.71E+04	1.77E+02	4.09E+02	3.06E-02	2.01E+01
AVG.LUNG	2.86E+04	3.20E+04	3.22E+04	2.56E+03	2.33E+01	5.66E+01	2.07E+03
LIVER	3.07E-01	2.68E-01	1.26E+02	8.39E+00	1.24E+03	3.39E-01	5.29E+01
KIDNEY	3.91E+01	4.38E+01	1.36E+01	3.92E+00	5.12E+02	1.18E+01	2.80E+02

## INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF TEENAGE

AMAD= 1.5 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	8.55E+02	9.62E+02	1.77E+03	9.20E+01	9.06E+01	2.13E+00	9.38E+01
BONE	4.15E+01	4.63E+01	1.97E+04	7.02E+02	9.58E+02	1.23E-01	1.46E+01
AVG.LUNG	6.88E+03	7.69E+03	7.76E+03	5.21E+02	9.51E+00	1.12E+01	4.20E+02
LIVER	8.43E-02	7.30E-02	3.76E+01	5.30E+00	5.07E+02	2.37E-01	2.73E+01
KIDNEY	1.17E+01	1.31E+01	4.28E+00	5.89E+00	2.39E+02	7.74E+00	1.65E+02
AMAD= 3.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	5.20E+02	5.83E+02	1.16E+03	6.56E+01	9.87E+01	1.69E+00	7.74E+01
BONE	3.06E+01	3.41E+01	1.43E+04	7.87E+02	1.04E+03	1.57E-01	1.65E+01
AVG.LUNG	4.34E+03	4.85E+03	4.90E+03	3.29E+02	1.03E+01	7.06E+00	2.65E+02
LIVER	5.95E-02	5.38E-02	2.72E+01	5.94E+00	5.51E+02	3.03E-01	3.08E+01
KIDNEY	8.61E+00	9.64E+00	3.10E+00	6.60E+00	2.58E+02	9.18E+00	1.87E+02
AMAD= 5.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	3.62E+02	4.05E+02	7.96E+02	6.65E+01	1.06E+02	1.50E+00	7.55E+01
BONE	2.97E+01	3.32E+01	1.11E+04	9.02E+02	1.17E+03	1.91E-01	1.92E+01
AVG.LUNG	2.86E+03	3.19E+03	3.22E+03	2.16E+02	1.19E+01	5.03E+00	1.75E+02
LIVER	4.90E-02	4.64E-02	2.13E+01	6.76E+00	6.34E+02	3.77E-01	3.56E+01
KIDNEY	7.42E+00	8.31E+00	2.42E+00	8.19E+00	2.95E+02	1.10E+01	2.16E+02
AMAD=54.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	6.22E-01	6.85E-01	1.88E+02	2.76E+01	1.04E+02	8.77E-01	4.70E+01
BONE	1.40E+01	1.57E+01	4.70E+03	8.83E+02	1.17E+03	2.29E-01	1.80E+01
AVG.LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.18E+01	0.00E+00	0.00E+00
LIVER	1.83E-02	2.19E-02	8.98E+00	6.62E+00	6.32E+02	4.50E-01	3.33E+01
KIDNEY	3.50E+00	3.92E+00	1.02E+00	8.02E+00	2.91E+02	1.05E+01	2.02E+02
AMAD= 0.3 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.74E+03	1.95E+03	3.44E+03	1.58E+02	8.76E+01	3.26E+00	1.48E+02
BONE	7.49E+01	8.37E+01	3.83E+04	6.46E+02	1.01E+03	7.54E-02	1.27E+01
AVG.LUNG	1.49E+04	1.67E+04	1.68E+04	1.13E+03	9.99E+00	2.42E+01	9.11E+02
LIVER	1.54E-01	1.28E-01	6.64E+01	4.76E+00	5.33E+02	1.45E-01	2.48E+01
KIDNEY	2.05E+01	2.29E+01	7.56E+00	4.76E+00	2.56E+02	5.91E+00	1.50E+02

INHALATION DOSE CONVERSION FACTORS, MREM/YR PER PCI/M3, FOR AGE GROUP OF ADULT

AMAD= 1.5 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	7.13E+02	8.02E+02	1.61E+03	5.41E+01	6.97E+01	1.64E+00	5.87E+01
BONE	2.30E+01	2.57E+01	1.97E+04	2.19E+02	5.64E+02	7.24E-02	5.82E+00
AVG.LUNG	5.73E+03	6.41E+03	6.47E+03	3.47E+02	7.92E+00	9.32E+00	2.80E+02
LIVER	7.03E-02	6.09E-02	3.42E+01	2.94E+00	4.23E+02	1.97E-01	1.82E+01
KIDNEY	9.73E+00	1.09E+01	3.89E+00	2.94E+00	1.99E+02	6.45E+00	1.10E+02

AMAD= 3.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	4.34E+02	4.85E+02	1.05E+03	3.86E+01	7.59E+01	1.30E+00	4.84E+01
BONE	1.70E+01	1.90E+01	1.43E+04	2.46E+02	6.12E+02	9.26E-02	6.58E+00
AVG.LUNG	3.62E+03	4.05E+03	4.08E+03	2.19E+02	8.61E+00	5.88E+00	1.77E+02
LIVER	4.96E-02	4.48E-02	2.47E+01	3.30E+00	4.59E+02	2.52E-01	2.05E+01
KIDNEY	7.17E+00	8.03E+00	2.81E+00	3.30E+00	2.15E+02	7.65E+00	1.25E+02

AMAD= 5.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	3.01E+02	3.37E+02	7.96E+02	3.17E+01	8.18E+01	1.15E+00	4.44E+01
BONE	1.35E+01	1.51E+01	1.11E+04	2.65E+02	6.50E+02	1.06E-01	7.12E+00
AVG.LUNG	2.38E+03	2.66E+03	2.69E+03	1.44E+02	9.14E+00	3.87E+00	1.16E+02
LIVER	3.77E-02	3.57E-02	1.93E+01	3.56E+00	4.88E+02	2.90E-01	2.22E+01
KIDNEY	5.71E+00	6.40E+00	2.20E+00	3.56E+00	2.27E+02	8.47E+00	1.35E+02

AMAD=54.0 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	5.18E-01	5.71E-01	1.88E+02	1.31E+01	8.03E+01	6.75E-01	2.77E+01
BONE	6.37E+00	7.12E+00	4.70E+03	2.60E+02	6.48E+02	1.27E-01	6.66E+00
AVG.LUNG	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.11E+00	0.00E+00	0.00E+00
LIVER	1.41E-02	1.68E-02	8.16E+00	3.49E+00	4.86E+02	3.46E-01	2.08E+01
KIDNEY	2.69E+00	3.01E+00	9.29E-01	3.49E+00	2.24E+02	8.05E+00	1.26E+02

AMAD= 0.3 æm	U-238	U-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
EFFECTIV	1.45E+03	1.63E+03	3.12E+03	9.86E+01	7.30E+01	2.72E+00	9.27E+01
BONE	4.41E+01	4.92E+01	3.83E+04	2.09E+02	5.92E+02	4.44E-02	5.29E+00
AVG.LUNG	1.24E+04	1.39E+04	1.40E+04	7.53E+02	8.33E+00	2.02E+01	6.07E+02
LIVER	1.40E-01	1.16E-01	6.64E+01	2.80E+00	4.44E+02	1.21E-01	1.65E+01
KIDNEY	1.86E+01	2.08E+01	7.56E+00	2.80E+00	2.13E+02	4.93E+00	1.00E+02

EXTERNAL WHOLE BODY DOSE CONVERSION FACTORS

	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214
GROUND, MR/YR PER PCI/M2	3.70E-06	6.12E-07	9.47E-07	2.27E-06	5.03E-08	1.10E-08	3.16E-05	1.85E-04
CLOUD, MR/YR PER PCI/M3	1.23E-04	3.59E-06	4.90E-05	1.43E-05	2.83E-06	6.34E-07	1.67E-03	1.16E-02
WORKING LEVEL CONCENTRATION FACTORS, WL PER PCI/M3	.....	.....	.....	.....	.....	1.03E-06	5.07E-06	3.73E-06

INGESTION DOSE CONVERSION FACTORS, MREM PER PCI INGESTED

AGE GROUP	TISSUE	U-238	U-234	Th-234	Th-230	Ra-226	Pb-210	Bi-210	Po-210
INFANT	EFFECTIV	1.61E-02	1.79E-02	8.57E-04	2.51E-02	2.11E-02	3.11E-02	3.88E-05	7.95E-02
INFANT	BONE	4.49E-02	5.43E-02	9.24E-07	4.39E-02	1.09E-01	1.86E-01	6.00E-07	3.29E-02
INFANT	LIVER	2.72E-04	3.15E-04	4.93E-07	3.74E-03	8.48E-03	3.62E-01	7.52E-06	4.48E-02
INFANT	KIDNEY	4.93E-02	5.71E-02	4.38E-07	3.53E-04	3.32E-03	1.35E-01	2.86E-04	2.23E-01
CHILD	EFFECTIV	9.95E-04	1.14E-03	5.30E-05	1.53E-03	2.38E-03	8.67E-03	1.08E-05	9.12E-03
CHILD	BONE	4.86E-03	5.43E-03	1.00E-07	3.32E-03	2.50E-02	7.86E-02	2.53E-07	2.07E-03
CHILD	LIVER	3.74E-05	4.20E-05	6.78E-08	1.45E-04	1.32E-03	8.81E-02	1.83E-06	6.88E-03
CHILD	KIDNEY	6.01E-03	6.75E-03	5.34E-08	1.54E-05	6.44E-04	3.54E-02	7.48E-05	3.44E-02
TEENAGE	EFFECTIV	7.90E-04	8.80E-04	4.22E-05	1.20E-03	4.22E-03	1.12E-02	1.40E-05	4.85E-03
TEENAGE	BONE	1.83E-02	2.05E-02	3.77E-07	3.32E-03	1.09E-01	2.35E-01	7.57E-07	1.65E-03
TEENAGE	LIVER	2.13E-05	2.39E-05	3.85E-08	5.94E-05	8.14E-04	4.75E-02	9.87E-07	3.68E-03
TEENAGE	KIDNEY	3.85E-03	4.33E-03	3.43E-08	6.80E-06	1.02E-03	2.18E-02	4.62E-05	2.04E-02
ADULT	EFFECTIV	2.55E-04	2.84E-04	1.36E-05	5.46E-04	1.32E-03	5.10E-03	6.36E-06	1.94E-03
ADULT	BONE	3.74E-03	4.18E-03	7.70E-08	1.33E-03	2.53E-02	8.10E-02	2.61E-07	4.22E-04
ADULT	LIVER	8.51E-06	9.55E-06	1.54E-08	2.20E-05	3.39E-04	2.26E-02	4.70E-07	1.60E-03
ADULT	KIDNEY	1.54E-03	1.73E-03	1.37E-08	2.52E-06	3.39E-04	1.04E-02	2.20E-05	9.29E-03

CONCENTRATION FACTOR		ENVIRONMENTAL CONCENTRATION FACTORS				
		FOOD TYPE	U-238	Th-230	Ra-226	Pb-210
BIV, DIMENSIONLESS	ED. ABG.		2.50E-03	4.20E-03	1.40E-02	4.00E-03
BIV, DIMENSIONLESS	POTATO		2.50E-03	4.20E-03	3.00E-03	4.00E-03
BIV, DIMENSIONLESS	BELOW G.		2.50E-03	4.20E-03	1.40E-02	4.00E-03
BIV, DIMENSIONLESS	FORAGE		2.50E-03	4.20E-03	1.80E-02	2.80E-02
BIV, DIMENSIONLESS	ST. FEED		2.50E-03	4.20E-03	8.20E-02	3.60E-02
FBI, PCI/KG PER PCI/DAY	MEAT		3.40E-04	2.00E-04	5.10E-04	7.10E-04
FMI, PCI/L PER PCI/DAY	MILK		6.10E-04	5.00E-06	5.90E-04	1.20E-04
FRACTION IN ED PORTION	ED. ABG.		1.00E+00	1.00E+00	1.00E+00	1.00E+00
FRACTION IN ED PORTION	POTATO		1.00E-01	1.00E-01	1.00E-01	1.00E-01
FRACTION IN ED PORTION	BELOW G.		1.00E-01	1.00E-01	1.00E-01	1.00E-01
FRACTION IN ED PORTION	FORAGE		1.00E+00	1.00E+00	1.00E+00	1.00E+00
FRACTION IN ED PORTION	ST. FEED		1.00E+00	1.00E+00	1.00E+00	1.00E+00

NO.	TIME STEP NAME	PAJUST	TIME STEP DEPENDENT VARIABLES							
			GFACT U-238	GFACT Th-230	GFACT Ra-226	GFACT Pb-210	TFACT U-238	TFACT Th-230	TFACT Ra-226	TFACT Pb-210
1		1.000E+00	1.525E+08	1.525E+08	1.523E+08	1.413E+08	1.622E+00	1.622E+00	1.622E+00	1.619E+00

XPFACT=2.640E+02    GPFACT(4)=1.707E+09 1.707E+09 1.679E+09 6.943E+08    TPFACT(4)=1.638E+00 1.638E+00 1.638E+00 1.624E+00

TIME STEP NUMBER 1, DURATION IN YRS IS... 5.0

CONCENTRATION DATA FOR THE N DIRECTION, THETA EQUALS 0.0 DEGREES

TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	1.085E-02	2.984E-05	2.713E-05	5.413E-05	3.000E+02	2.825E+02	1.199E+02	4.539E+01	2.885E-05	1.068E-03
2.5	5.489E-03	1.509E-05	1.372E-05	2.738E-05	1.364E+02	1.333E+02	8.022E+01	4.644E+01	5.954E-05	7.172E-04
3.5	3.274E-03	9.003E-06	8.185E-06	1.633E-05	8.594E+01	8.512E+01	6.027E+01	4.265E+01	8.767E-05	5.523E-04
4.5	2.255E-03	6.201E-06	5.637E-06	1.125E-05	6.085E+01	6.060E+01	4.695E+01	3.696E+01	1.087E-04	4.383E-04
7.5	9.881E-04	2.717E-06	2.470E-06	4.929E-06	3.273E+01	3.273E+01	2.847E+01	2.507E+01	1.508E-04	2.716E-04
15.0	2.866E-04	7.881E-07	7.165E-07	1.430E-06	1.418E+01	1.419E+01	1.350E+01	1.264E+01	1.777E-04	1.302E-04
25.0	1.071E-04	2.946E-07	2.678E-07	5.343E-07	7.685E+00	7.689E+00	7.588E+00	7.394E+00	1.808E-04	7.397E-05
35.0	5.416E-05	1.489E-07	1.354E-07	2.702E-07	5.129E+00	5.132E+00	5.122E+00	5.076E+00	1.784E-04	5.019E-05
45.0	3.162E-05	8.696E-08	7.906E-08	1.577E-07	3.787E+00	3.789E+00	3.798E+00	3.790E+00	1.750E-04	3.729E-05
55.0	2.001E-05	5.501E-08	5.001E-08	9.979E-08	2.989E+00	2.990E+00	3.001E+00	3.004E+00	1.727E-04	2.950E-05
65.0	1.331E-05	3.661E-08	3.328E-08	6.640E-08	2.445E+00	2.447E+00	2.457E+00	2.463E+00	1.701E-04	2.417E-05
75.0	9.180E-06	2.524E-08	2.295E-08	4.579E-08	2.053E+00	2.055E+00	2.064E+00	2.070E+00	1.672E-04	2.030E-05

GROUND SURFACE CONCENTRATIONS, PCI/M2

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210
1.5	1.020E+04	2.804E+01	2.547E+01	2.547E+01	0.000E+00	2.492E+02	2.492E+02	2.492E+02	1.223E+01
2.5	5.157E+03	1.418E+01	1.288E+01	1.288E+01	0.000E+00	1.184E+02	1.184E+02	1.184E+02	2.524E+01
3.5	3.076E+03	8.460E+00	7.683E+00	7.683E+00	0.000E+00	7.510E+01	7.510E+01	7.510E+01	3.717E+01
4.5	2.119E+03	5.826E+00	5.291E+00	5.291E+00	0.000E+00	5.329E+01	5.329E+01	5.329E+01	4.609E+01
7.5	9.285E+02	2.553E+00	2.319E+00	2.319E+00	0.000E+00	2.824E+01	2.824E+01	2.824E+01	6.395E+01
15.0	2.693E+02	7.405E-01	6.725E-01	6.725E-01	0.000E+00	1.191E+01	1.191E+01	1.191E+01	7.535E+01
25.0	1.007E+02	2.768E-01	2.514E-01	2.514E-01	0.000E+00	6.341E+00	6.341E+00	6.341E+00	7.666E+01
35.0	5.089E+01	1.399E-01	1.271E-01	1.271E-01	0.000E+00	4.192E+00	4.192E+00	4.192E+00	7.563E+01
45.0	2.971E+01	8.171E-02	7.421E-02	7.421E-02	0.000E+00	3.076E+00	3.076E+00	3.076E+00	7.420E+01
55.0	1.880E+01	5.169E-02	4.694E-02	4.694E-02	0.000E+00	2.415E+00	2.415E+00	2.415E+00	7.323E+01
65.0	1.251E+01	3.440E-02	3.124E-02	3.124E-02	0.000E+00	1.969E+00	1.969E+00	1.969E+00	7.210E+01
75.0	8.626E+00	2.372E-02	2.154E-02	2.154E-02	0.000E+00	1.649E+00	1.649E+00	1.649E+00	7.091E+01

TOTAL DEPOSITION RATES, PCI/M2-SEC

XRHO, KM	U-238	Th-230	Ra-226	Pb-210
1.5	1.085E-04	2.984E-07	2.713E-07	6.279E-07
2.5	5.489E-05	1.509E-07	1.372E-07	4.524E-07
3.5	3.274E-05	9.003E-08	8.185E-08	4.263E-07
4.5	2.255E-05	6.201E-08	5.637E-08	4.386E-07
7.5	9.881E-06	2.717E-08	2.470E-08	5.018E-07
15.0	2.866E-06	7.881E-09	7.165E-09	5.474E-07
25.0	1.071E-06	2.946E-09	2.678E-09	5.478E-07
35.0	5.416E-07	1.489E-09	1.354E-09	5.378E-07
45.0	3.162E-07	8.696E-10	7.906E-10	5.266E-07
55.0	2.001E-07	5.501E-10	5.001E-10	5.192E-07
65.0	1.331E-07	3.661E-10	3.328E-10	5.108E-07
75.0	9.180E-08	2.524E-10	2.295E-10	5.022E-07

TIME STEP NUMBER 1, DURATION IN YRS IS... 5.0

CONCENTRATION DATA FOR THE E DIRECTION, THETA EQUALS 90.0 DEGREES

TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	6.933E-03	1.907E-05	1.733E-05	3.458E-05	1.072E+02	1.058E+02	6.573E+01	3.519E+01	3.695E-05	5.735E-04
2.5	3.449E-03	9.486E-06	8.623E-06	1.721E-05	6.233E+01	6.200E+01	4.773E+01	3.368E+01	6.130E-05	4.315E-04
3.5	1.982E-03	5.452E-06	4.956E-06	9.888E-06	4.246E+01	4.237E+01	3.608E+01	2.933E+01	8.006E-05	3.360E-04
4.5	1.323E-03	3.639E-06	3.308E-06	6.600E-06	3.233E+01	3.230E+01	2.898E+01	2.545E+01	9.578E-05	2.751E-04
7.5	5.246E-04	1.443E-06	1.311E-06	2.617E-06	1.879E+01	1.879E+01	1.788E+01	1.702E+01	1.255E-04	1.735E-04
15.0	1.214E-04	3.338E-07	3.034E-07	6.055E-07	8.765E+00	8.770E+00	8.616E+00	8.424E+00	1.465E-04	8.414E-05
25.0	3.692E-05	1.015E-07	9.229E-08	1.841E-07	4.899E+00	4.901E+00	4.881E+00	4.833E+00	1.493E-04	4.782E-05
35.0	1.694E-05	4.659E-08	4.235E-08	8.451E-08	3.307E+00	3.309E+00	3.312E+00	3.301E+00	1.475E-04	3.251E-05
45.0	9.635E-06	2.650E-08	2.409E-08	4.806E-08	2.458E+00	2.460E+00	2.467E+00	2.467E+00	1.452E-04	2.424E-05
55.0	6.141E-06	1.689E-08	1.535E-08	3.063E-08	1.928E+00	1.930E+00	1.937E+00	1.940E+00	1.425E-04	1.905E-05
65.0	4.174E-06	1.148E-08	1.043E-08	2.082E-08	1.568E+00	1.569E+00	1.576E+00	1.580E+00	1.396E-04	1.550E-05
75.0	2.953E-06	8.121E-09	7.383E-09	1.473E-08	1.309E+00	1.310E+00	1.316E+00	1.320E+00	1.369E-04	1.294E-05

GROUND SURFACE CONCENTRATIONS, PCI/M2

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210
1.5	6.514E+03	1.791E+01	1.627E+01	1.627E+01	0.000E+00	1.001E+02	1.001E+02	1.001E+02	1.566E+01
2.5	3.241E+03	8.913E+00	8.094E+00	8.094E+00	0.000E+00	5.720E+01	5.720E+01	5.720E+01	2.599E+01
3.5	1.863E+03	5.122E+00	4.652E+00	4.652E+00	0.000E+00	3.821E+01	3.821E+01	3.821E+01	3.395E+01
4.5	1.243E+03	3.419E+00	3.105E+00	3.105E+00	0.000E+00	2.868E+01	2.868E+01	2.868E+01	4.061E+01
7.5	4.929E+02	1.356E+00	1.231E+00	1.231E+00	0.000E+00	1.612E+01	1.612E+01	1.612E+01	5.320E+01
15.0	1.141E+02	3.136E-01	2.848E-01	2.848E-01	0.000E+00	7.231E+00	7.231E+00	7.231E+00	6.209E+01
25.0	3.469E+01	9.539E-02	8.663E-02	8.663E-02	0.000E+00	3.969E+00	3.969E+00	3.969E+00	6.330E+01
35.0	1.592E+01	4.378E-02	3.975E-02	3.975E-02	0.000E+00	2.661E+00	2.661E+00	2.661E+00	6.255E+01
45.0	9.053E+00	2.490E-02	2.261E-02	2.261E-02	0.000E+00	1.971E+00	1.971E+00	1.971E+00	6.156E+01
55.0	5.770E+00	1.587E-02	1.441E-02	1.441E-02	0.000E+00	1.543E+00	1.543E+00	1.543E+00	6.040E+01
65.0	3.922E+00	1.078E-02	9.794E-03	9.794E-03	0.000E+00	1.253E+00	1.253E+00	1.253E+00	5.921E+01
75.0	2.775E+00	7.631E-03	6.930E-03	6.930E-03	0.000E+00	1.044E+00	1.044E+00	1.044E+00	5.803E+01

TOTAL DEPOSITION RATES, PCI/M2-SEC

XRHO, KM	U-238	Th-230	Ra-226	Pb-210
1.5	6.933E-05	1.907E-07	1.733E-07	4.567E-07
2.5	3.449E-05	9.486E-08	8.623E-08	3.560E-07
3.5	1.982E-05	5.452E-08	4.956E-08	3.391E-07
4.5	1.323E-05	3.639E-08	3.308E-08	3.533E-07
7.5	5.246E-06	1.443E-08	1.311E-08	4.026E-07
15.0	1.214E-06	3.338E-09	3.034E-09	4.454E-07
25.0	3.692E-07	1.015E-09	9.229E-10	4.498E-07
35.0	1.694E-07	4.659E-10	4.235E-10	4.434E-07
45.0	9.635E-08	2.650E-10	2.409E-10	4.361E-07
55.0	6.141E-08	1.689E-10	1.535E-10	4.277E-07
65.0	4.174E-08	1.148E-10	1.043E-10	4.191E-07
75.0	2.953E-08	8.121E-11	7.383E-11	4.107E-07

TIME STEP NUMBER 1, DURATION IN YRS IS... 5.0

CONCENTRATION DATA FOR THE S DIRECTION, THETA EQUALS 180.0 DEGREES

TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	1.156E-02	3.179E-05	2.890E-05	5.766E-05	1.752E+02	1.720E+02	9.831E+01	4.926E+01	4.688E-05	8.594E-04
2.5	6.065E-03	1.668E-05	1.516E-05	3.025E-05	1.035E+02	1.028E+02	7.462E+01	5.031E+01	8.496E-05	6.719E-04
3.5	3.471E-03	9.546E-06	8.678E-06	1.731E-05	7.128E+01	7.110E+01	5.795E+01	4.546E+01	1.163E-04	5.366E-04
4.5	2.259E-03	6.213E-06	5.648E-06	1.127E-05	5.401E+01	5.396E+01	4.682E+01	3.989E+01	1.413E-04	4.417E-04
7.5	8.456E-04	2.326E-06	2.114E-06	4.218E-06	3.063E+01	3.064E+01	2.867E+01	2.673E+01	1.860E-04	2.766E-04
15.0	1.863E-04	5.124E-07	4.658E-07	9.294E-07	1.364E+01	1.365E+01	1.339E+01	1.302E+01	2.122E-04	1.305E-04
25.0	5.655E-05	1.555E-07	1.414E-07	2.821E-07	7.357E+00	7.361E+00	7.342E+00	7.278E+00	2.107E-04	7.195E-05
35.0	2.545E-05	7.000E-08	6.363E-08	1.270E-07	4.850E+00	4.852E+00	4.863E+00	4.855E+00	2.041E-04	4.776E-05
45.0	1.387E-05	3.815E-08	3.468E-08	6.920E-08	3.533E+00	3.535E+00	3.548E+00	3.553E+00	1.972E-04	3.488E-05
55.0	8.400E-06	2.310E-08	2.100E-08	4.190E-08	2.738E+00	2.740E+00	2.752E+00	2.758E+00	1.913E-04	2.706E-05
65.0	5.424E-06	1.492E-08	1.356E-08	2.706E-08	2.205E+00	2.207E+00	2.217E+00	2.224E+00	1.857E-04	2.181E-05
75.0	3.659E-06	1.006E-08	9.148E-09	1.825E-08	1.826E+00	1.827E+00	1.836E+00	1.842E+00	1.805E-04	1.806E-05

GROUND SURFACE CONCENTRATIONS, PCI/M2

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210
1.5	1.086E+04	2.987E+01	2.713E+01	2.713E+01	0.000E+00	1.634E+02	1.634E+02	1.634E+02	1.988E+01
2.5	5.699E+03	1.567E+01	1.423E+01	1.423E+01	0.000E+00	9.565E+01	9.565E+01	9.565E+01	3.602E+01
3.5	3.262E+03	8.969E+00	8.146E+00	8.146E+00	0.000E+00	6.446E+01	6.446E+01	6.446E+01	4.929E+01
4.5	2.123E+03	5.837E+00	5.301E+00	5.301E+00	0.000E+00	4.804E+01	4.804E+01	4.804E+01	5.990E+01
7.5	7.946E+02	2.185E+00	1.984E+00	1.984E+00	0.000E+00	2.625E+01	2.625E+01	2.625E+01	7.888E+01
15.0	1.751E+02	4.814E-01	4.372E-01	4.372E-01	0.000E+00	1.125E+01	1.125E+01	1.125E+01	8.996E+01
25.0	5.314E+01	1.461E-01	1.327E-01	1.327E-01	0.000E+00	5.963E+00	5.963E+00	5.963E+00	8.934E+01
35.0	2.392E+01	6.577E-02	5.973E-02	5.973E-02	0.000E+00	3.903E+00	3.903E+00	3.903E+00	8.652E+01
45.0	1.304E+01	3.585E-02	3.255E-02	3.255E-02	0.000E+00	2.832E+00	2.832E+00	2.832E+00	8.361E+01
55.0	7.893E+00	2.171E-02	1.971E-02	1.971E-02	0.000E+00	2.190E+00	2.190E+00	2.190E+00	8.110E+01
65.0	5.097E+00	1.402E-02	1.273E-02	1.273E-02	0.000E+00	1.761E+00	1.761E+00	1.761E+00	7.873E+01
75.0	3.439E+00	9.456E-03	8.587E-03	8.587E-03	0.000E+00	1.456E+00	1.456E+00	1.456E+00	7.653E+01

TOTAL DEPOSITION RATES, PCI/M2-SEC

XRHO, KM	U-238	Th-230	Ra-226	Pb-210
1.5	1.156E-04	3.179E-07	2.890E-07	7.173E-07
2.5	6.065E-05	1.668E-07	1.516E-07	5.574E-07
3.5	3.471E-05	9.546E-08	8.678E-08	5.219E-07
4.5	2.259E-05	6.213E-08	5.648E-08	5.365E-07
7.5	8.456E-06	2.326E-08	2.114E-08	6.003E-07
15.0	1.863E-06	5.124E-09	4.658E-09	6.458E-07
25.0	5.655E-07	1.555E-09	1.414E-09	6.350E-07
35.0	2.545E-07	7.000E-10	6.363E-10	6.135E-07
45.0	1.387E-07	3.815E-10	3.468E-10	5.923E-07
55.0	8.400E-08	2.310E-10	2.100E-10	5.743E-07
65.0	5.424E-08	1.492E-10	1.356E-10	5.574E-07
75.0	3.659E-08	1.006E-10	9.148E-11	5.417E-07

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

CONCENTRATION DATA FOR THE SSW DIRECTION, THETA EQUALS 202.5 DEGREES

TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	1.146E-02	3.150E-05	2.864E-05	5.714E-05	3.143E+02	3.082E+02	1.668E+02	7.816E+01	6.677E-05	1.455E-03
2.5	5.757E-03	1.583E-05	1.439E-05	2.872E-05	1.520E+02	1.510E+02	1.073E+02	6.988E+01	1.086E-04	9.600E-04
3.5	3.198E-03	8.794E-06	7.994E-06	1.595E-05	9.514E+01	9.489E+01	7.685E+01	5.925E+01	1.414E-04	7.084E-04
4.5	2.039E-03	5.606E-06	5.096E-06	1.017E-05	6.695E+01	6.688E+01	5.811E+01	4.920E+01	1.646E-04	5.470E-04
7.5	7.313E-04	2.011E-06	1.828E-06	3.648E-06	3.387E+01	3.388E+01	3.192E+01	2.996E+01	2.025E-04	3.085E-04
15.0	1.493E-04	4.107E-07	3.733E-07	7.449E-07	1.342E+01	1.342E+01	1.321E+01	1.291E+01	2.125E-04	1.289E-04
25.0	4.224E-05	1.162E-07	1.056E-07	2.107E-07	6.814E+00	6.818E+00	6.801E+00	6.750E+00	2.014E-04	6.668E-05
35.0	1.834E-05	5.045E-08	4.586E-08	9.150E-08	4.359E+00	4.362E+00	4.369E+00	4.362E+00	1.904E-04	4.291E-05
45.0	9.899E-06	2.722E-08	2.475E-08	4.938E-08	3.116E+00	3.118E+00	3.128E+00	3.130E+00	1.812E-04	3.075E-05
55.0	6.024E-06	1.657E-08	1.506E-08	3.005E-08	2.397E+00	2.399E+00	2.408E+00	2.413E+00	1.748E-04	2.368E-05
65.0	3.942E-06	1.084E-08	9.854E-09	1.966E-08	1.924E+00	1.925E+00	1.934E+00	1.939E+00	1.694E-04	1.902E-05
75.0	2.707E-06	7.443E-09	6.767E-09	1.350E-08	1.588E+00	1.589E+00	1.596E+00	1.601E+00	1.643E-04	1.570E-05

GROUND SURFACE CONCENTRATIONS, PCI/M2

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210
1.5	1.076E+04	2.960E+01	2.688E+01	2.688E+01	0.000E+00	2.710E+02	2.710E+02	2.710E+02	2.831E+01
2.5	5.410E+03	1.488E+01	1.351E+01	1.351E+01	0.000E+00	1.331E+02	1.331E+02	1.331E+02	4.603E+01
3.5	3.005E+03	8.263E+00	7.504E+00	7.504E+00	0.000E+00	8.266E+01	8.266E+01	8.266E+01	5.996E+01
4.5	1.916E+03	5.268E+00	4.784E+00	4.784E+00	0.000E+00	5.776E+01	5.776E+01	5.776E+01	6.977E+01
7.5	6.872E+02	1.890E+00	1.716E+00	1.716E+00	0.000E+00	2.855E+01	2.855E+01	2.855E+01	8.585E+01
15.0	1.403E+02	3.859E-01	3.504E-01	3.504E-01	0.000E+00	1.098E+01	1.098E+01	1.098E+01	9.011E+01
25.0	3.969E+01	1.092E-01	9.913E-02	9.913E-02	0.000E+00	5.499E+00	5.499E+00	5.499E+00	8.539E+01
35.0	1.724E+01	4.740E-02	4.305E-02	4.305E-02	0.000E+00	3.498E+00	3.498E+00	3.498E+00	8.073E+01
45.0	9.302E+00	2.558E-02	2.323E-02	2.323E-02	0.000E+00	2.492E+00	2.492E+00	2.492E+00	7.684E+01
55.0	5.661E+00	1.557E-02	1.414E-02	1.414E-02	0.000E+00	1.914E+00	1.914E+00	1.914E+00	7.412E+01
65.0	3.704E+00	1.019E-02	9.249E-03	9.249E-03	0.000E+00	1.534E+00	1.534E+00	1.534E+00	7.181E+01
75.0	2.543E+00	6.994E-03	6.352E-03	6.352E-03	0.000E+00	1.265E+00	1.265E+00	1.265E+00	6.968E+01

TOTAL DEPOSITION RATES, PCI/M2-SEC

XRHO, KM	U-238	Th-230	Ra-226	Pb-210
1.5	1.146E-04	3.150E-07	2.864E-07	7.717E-07
2.5	5.757E-05	1.583E-07	1.439E-07	6.129E-07
3.5	3.198E-05	8.794E-08	7.994E-08	5.838E-07
4.5	2.039E-05	5.606E-08	5.096E-08	5.954E-07
7.5	7.313E-06	2.011E-08	1.828E-08	6.439E-07
15.0	1.493E-06	4.107E-09	3.733E-09	6.450E-07
25.0	4.224E-07	1.162E-09	1.056E-09	6.063E-07
35.0	1.834E-07	5.045E-10	4.586E-10	5.722E-07
45.0	9.899E-08	2.722E-10	2.475E-10	5.442E-07
55.0	6.024E-08	1.657E-10	1.506E-10	5.248E-07
65.0	3.942E-08	1.084E-10	9.854E-11	5.083E-07
75.0	2.707E-08	7.443E-11	6.767E-11	4.932E-07

TIME STEP NUMBER 1, DURATION IN YRS IS... 5.0

CONCENTRATION DATA FOR THE W DIRECTION, THETA EQUALS 270.0 DEGREES

TOTAL AIR CONCENTRATIONS, PCI/M3, AND WL

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	WL
1.5	5.780E-03	1.589E-05	1.445E-05	2.883E-05	2.671E+02	2.579E+02	1.043E+02	3.453E+01	1.804E-05	9.229E-04
2.5	2.970E-03	8.168E-06	7.425E-06	1.481E-05	9.700E+01	9.623E+01	6.284E+01	3.569E+01	4.165E-05	5.508E-04
3.5	1.667E-03	4.585E-06	4.168E-06	8.316E-06	5.649E+01	5.634E+01	4.436E+01	3.210E+01	6.265E-05	4.027E-04
4.5	1.068E-03	2.938E-06	2.671E-06	5.329E-06	3.819E+01	3.816E+01	3.294E+01	2.707E+01	7.771E-05	3.073E-04
7.5	3.785E-04	1.041E-06	9.463E-07	1.888E-06	1.879E+01	1.880E+01	1.789E+01	1.684E+01	1.051E-04	1.729E-04
15.0	7.052E-05	1.939E-07	1.763E-07	3.518E-07	7.477E+00	7.481E+00	7.416E+00	7.298E+00	1.178E-04	7.253E-05
25.0	1.688E-05	4.643E-08	4.221E-08	8.421E-08	3.827E+00	3.829E+00	3.835E+00	3.826E+00	1.145E-04	3.766E-05
35.0	6.230E-06	1.713E-08	1.557E-08	3.108E-08	2.460E+00	2.461E+00	2.471E+00	2.475E+00	1.096E-04	2.429E-05
45.0	2.947E-06	8.103E-09	7.366E-09	1.470E-08	1.776E+00	1.777E+00	1.785E+00	1.790E+00	1.058E-04	1.755E-05
55.0	1.622E-06	4.459E-09	4.054E-09	8.089E-09	1.362E+00	1.363E+00	1.370E+00	1.374E+00	1.022E-04	1.347E-05
65.0	9.811E-07	2.698E-09	2.453E-09	4.894E-09	1.088E+00	1.089E+00	1.094E+00	1.098E+00	9.889E-05	1.076E-05
75.0	6.320E-07	1.738E-09	1.580E-09	3.153E-09	8.946E-01	8.951E-01	8.995E-01	9.027E-01	9.588E-05	8.849E-06

GROUND SURFACE CONCENTRATIONS, PCI/M2

XRHO, KM	U-238	Th-230	Ra-226	Pb-210	Rn-222	Po-218	Pb-214	Bi-214	Pb-210
1.5	5.431E+03	1.493E+01	1.356E+01	1.356E+01	0.000E+00	2.178E+02	2.178E+02	2.178E+02	7.651E+00
2.5	2.791E+03	7.674E+00	6.969E+00	6.969E+00	0.000E+00	8.319E+01	8.319E+01	8.319E+01	1.766E+01
3.5	1.567E+03	4.308E+00	3.912E+00	3.912E+00	0.000E+00	4.854E+01	4.854E+01	4.854E+01	2.656E+01
4.5	1.004E+03	2.760E+00	2.507E+00	2.507E+00	0.000E+00	3.273E+01	3.273E+01	3.273E+01	3.295E+01
7.5	3.557E+02	9.781E-01	8.882E-01	8.882E-01	0.000E+00	1.578E+01	1.578E+01	1.578E+01	4.456E+01
15.0	6.627E+01	1.822E-01	1.655E-01	1.655E-01	0.000E+00	6.091E+00	6.091E+00	6.091E+00	4.994E+01
25.0	1.586E+01	4.362E-02	3.962E-02	3.962E-02	0.000E+00	3.073E+00	3.073E+00	3.073E+00	4.855E+01
35.0	5.854E+00	1.610E-02	1.462E-02	1.462E-02	0.000E+00	1.964E+00	1.964E+00	1.964E+00	4.645E+01
45.0	2.769E+00	7.614E-03	6.915E-03	6.915E-03	0.000E+00	1.414E+00	1.414E+00	1.414E+00	4.484E+01
55.0	1.524E+00	4.190E-03	3.805E-03	3.805E-03	0.000E+00	1.083E+00	1.083E+00	1.083E+00	4.332E+01
65.0	9.219E-01	2.535E-03	2.302E-03	2.302E-03	0.000E+00	8.647E-01	8.647E-01	8.647E-01	4.193E+01
75.0	5.939E-01	1.633E-03	1.483E-03	1.483E-03	0.000E+00	7.105E-01	7.105E-01	7.105E-01	4.065E+01

TOTAL DEPOSITION RATES, PCI/M2-SEC

XRHO, KM	U-238	Th-230	Ra-226	Pb-210
1.5	5.780E-05	1.589E-07	1.445E-07	3.424E-07
2.5	2.970E-05	8.168E-08	7.425E-08	2.731E-07
3.5	1.667E-05	4.585E-08	4.168E-08	2.711E-07
4.5	1.068E-05	2.938E-08	2.671E-08	2.864E-07
7.5	3.785E-06	1.041E-08	9.463E-09	3.342E-07
15.0	7.052E-07	1.939E-09	1.763E-09	3.569E-07
25.0	1.688E-07	4.643E-10	4.221E-10	3.443E-07
35.0	6.230E-08	1.713E-10	1.557E-10	3.290E-07
45.0	2.947E-08	8.103E-11	7.366E-11	3.174E-07
55.0	1.622E-08	4.459E-11	4.054E-11	3.066E-07
65.0	9.811E-09	2.698E-11	2.453E-11	2.967E-07
75.0	6.320E-09	1.738E-11	1.580E-11	2.877E-07

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS INHAL.

EXPOSED ORGAN IS EFFECTIV

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	2.241E-04	0.000E+00	0.000E+00	1.244E-04	0.000E+00	5.179E-03
NNE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.654E-05
NE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	4.669E-04	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ENE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
E	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	5.283E-05	0.000E+00	0.000E+00	1.126E-04	0.000E+00
ESE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	4.422E-06	0.000E+00
SE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SSE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
S	0.000E+00	0.000E+00	8.349E-01	0.000E+00	1.429E-02	0.000E+00	2.054E-02	0.000E+00	0.000E+00	0.000E+00	1.116E-03	5.974E-03
SSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
W	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	5.598E-04	2.920E-05
NW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.749E-05	2.964E-05	6.650E-06	0.000E+00
NNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	2.646E-05	3.478E-04

TOTAL DOSE COMMITMENT IS 8.841E-01 PERSON-REM/YR

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS INHAL.

EXPOSED ORGAN IS BONE

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	2.311E-04	0.000E+00	0.000E+00	4.157E-04	0.000E+00	2.495E-02
NNE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.791E-04
NE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.072E-03	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ENE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
E	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.775E-04	0.000E+00	0.000E+00	6.645E-04	0.000E+00
ESE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	2.827E-05	0.000E+00
SE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SSE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
S	0.000E+00	0.000E+00	8.907E-02	0.000E+00	3.184E-03	0.000E+00	3.931E-02	0.000E+00	0.000E+00	0.000E+00	6.627E-03	3.860E-02
SSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
W	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	4.083E-03	2.201E-04
NW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	9.835E-05	1.900E-04	4.599E-05	0.000E+00
NNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.431E-04	2.096E-03

TOTAL DOSE COMMITMENT IS 2.114E-01 PERSON-REM/YR

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS INHAL.

EXPOSED ORGAN IS AVG.LUNG

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.648E-03	0.000E+00	0.000E+00	6.209E-04	0.000E+00	1.804E-02
NNE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.241E-04
NE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	2.830E-03	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ENE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
E	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	2.628E-04	0.000E+00	0.000E+00	2.674E-04	0.000E+00
ESE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	8.280E-06	0.000E+00
SE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SSE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
S	0.000E+00	0.000E+00	6.929E+00	0.000E+00	1.169E-01	0.000E+00	1.326E-01	0.000E+00	0.000E+00	0.000E+00	2.608E-03	1.077E-02
SSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
W	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	5.332E-04	2.050E-05
NW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	4.657E-05	5.505E-05	8.899E-06	0.000E+00
NNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	7.619E-05	7.813E-04

TOTAL DOSE COMMITMENT IS 7.218E+00 PERSON-REM/YR

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS INHAL.

EXPOSED ORGAN IS BRONCHI

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.921E-02	0.000E+00	0.000E+00	1.494E-02	0.000E+00	6.417E-01
NNE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	4.394E-03
NE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	5.487E-02	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ENE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
E	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	8.268E-03	0.000E+00	0.000E+00	1.568E-02	0.000E+00
ESE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	6.503E-04	0.000E+00
SE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SSE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
S	0.000E+00	0.000E+00	2.316E+01	0.000E+00	6.891E-01	0.000E+00	2.796E+00	0.000E+00	0.000E+00	0.000E+00	1.654E-01	8.217E-01
SSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
W	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	9.165E-02	4.191E-03
NW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.482E-03	5.351E-03	1.070E-03	0.000E+00
NNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.811E-03	4.756E-02

TOTAL DOSE COMMITMENT IS 2.855E+01 PERSON-REM/YR

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS GROUND

EXPOSED ORGAN IS EFFECTIV

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.170E-06	0.000E+00	0.000E+00	2.505E-06	0.000E+00	1.135E-04
NNE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	7.882E-07
NE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	8.822E-06	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ENE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
E	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.283E-06	0.000E+00	0.000E+00	2.774E-06	0.000E+00
ESE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.148E-07	0.000E+00
SE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SSE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
S	0.000E+00	0.000E+00	5.614E-03	0.000E+00	1.309E-04	0.000E+00	4.242E-04	0.000E+00	0.000E+00	0.000E+00	2.866E-05	1.490E-04
SSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
W	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.605E-05	7.767E-07
NW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	5.449E-07	8.824E-07	1.863E-07	0.000E+00
NNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	6.543E-07	8.507E-06

TOTAL DOSE COMMITMENT IS 6.508E-03 PERSON-REM/YR

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS CLOUD

EXPOSED ORGAN IS EFFECTIV

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	1.625E-04	0.000E+00	0.000E+00	1.316E-04	0.000E+00	5.666E-03
NNE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.876E-05
NE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	4.754E-04	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ENE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
E	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	7.232E-05	0.000E+00	0.000E+00	1.384E-04	0.000E+00
ESE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	5.737E-06	0.000E+00
SE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SSE	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
S	0.000E+00	0.000E+00	1.339E-01	0.000E+00	5.318E-03	0.000E+00	2.425E-02	0.000E+00	0.000E+00	0.000E+00	1.460E-03	7.258E-03
SSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
SW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WSW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
W	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
WNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	8.094E-04	3.702E-05
NW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.071E-05	4.725E-05	9.454E-06	0.000E+00
NNW	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	3.365E-05	4.201E-04

TOTAL DOSE COMMITMENT IS 1.803E-01 PERSON-REM/YR

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS VEG. ING

EXPOSED ORGAN IS EFFECTIV

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	2.339E-03	2.019E-03	1.761E-03	1.650E-03	7.636E-03	1.720E-02	2.260E-02	2.863E-02	3.474E-02	4.104E-02	4.716E-02	5.308E-02
NNE	1.755E-03	1.565E-03	1.387E-03	1.305E-03	6.099E-03	1.413E-02	1.921E-02	2.489E-02	3.064E-02	3.642E-02	4.211E-02	4.761E-02
NE	8.247E-04	7.372E-04	6.669E-04	6.404E-04	3.104E-03	7.343E-03	1.003E-02	1.306E-02	1.614E-02	1.936E-02	2.254E-02	2.563E-02
ENE	1.060E-03	9.743E-04	8.757E-04	8.270E-04	3.925E-03	9.507E-03	1.324E-02	1.725E-02	2.131E-02	2.545E-02	2.944E-02	3.327E-02
E	1.506E-03	1.294E-03	1.105E-03	1.028E-03	4.761E-03	1.172E-02	1.683E-02	2.229E-02	2.776E-02	3.303E-02	3.810E-02	4.295E-02
ESE	6.343E-04	5.085E-04	4.177E-04	3.804E-04	1.751E-03	4.138E-03	5.911E-03	7.782E-03	9.588E-03	1.131E-02	1.294E-02	1.450E-02
SE	2.297E-04	1.895E-04	1.617E-04	1.524E-04	7.369E-04	1.680E-03	2.289E-03	3.043E-03	3.807E-03	4.548E-03	5.264E-03	5.952E-03
SSE	7.832E-04	7.125E-04	6.069E-04	5.498E-04	2.427E-03	5.799E-03	8.164E-03	1.061E-02	1.299E-02	1.527E-02	1.743E-02	1.948E-02
S	2.502E-03	2.251E-03	1.901E-03	1.714E-03	7.422E-03	1.721E-02	2.391E-02	3.093E-02	3.775E-02	4.437E-02	5.066E-02	5.662E-02
SSW	2.492E-03	2.166E-03	1.801E-03	1.616E-03	7.067E-03	1.644E-02	2.243E-02	2.859E-02	3.451E-02	4.042E-02	4.611E-02	5.149E-02
SW	9.228E-04	8.169E-04	7.044E-04	6.493E-04	2.968E-03	6.481E-03	7.973E-03	9.527E-03	1.103E-02	1.277E-02	1.449E-02	1.611E-02
WSW	8.368E-04	7.002E-04	5.799E-04	5.224E-04	2.331E-03	5.717E-03	8.118E-03	1.057E-02	1.295E-02	1.530E-02	1.753E-02	1.964E-02
W	1.247E-03	1.102E-03	9.229E-04	8.307E-04	3.662E-03	8.848E-03	1.250E-02	1.624E-02	1.996E-02	2.347E-02	2.680E-02	2.994E-02
WNW	5.441E-04	4.381E-04	3.600E-04	3.288E-04	1.525E-03	3.541E-03	4.757E-03	6.252E-03	7.694E-03	9.061E-03	1.036E-02	1.159E-02
NW	5.416E-04	4.376E-04	3.597E-04	3.247E-04	1.501E-03	3.561E-03	4.877E-03	6.354E-03	7.815E-03	9.199E-03	1.051E-02	1.176E-02
NNW	1.219E-03	9.678E-04	7.958E-04	7.392E-04	3.463E-03	7.980E-03	1.050E-02	1.321E-02	1.617E-02	1.910E-02	2.193E-02	2.464E-02

TOTAL DOSE COMMITMENT IS 2.251E+00 PERSON-REM/YR

WARNING--POPULATION FOOD INGESTION DOSES SHOWN  
 ABOVE HAVE NOT BEEN CORRECTED TO REFLECT POTENTIAL  
 FOOD EXPORT AND MAY EXCEED DOSES ACTUALLY RECEIVED  
 BY THE POPULATION OF THIS REGION. SEE SUMMARY  
 TABLE FOR THIS INFORMATION.

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS VEG. ING

EXPOSED ORGAN IS BONE

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	3.334E-02	2.862E-02	2.471E-02	2.287E-02	1.011E-01	2.084E-01	2.595E-01	3.216E-01	3.860E-01	4.532E-01	5.189E-01	5.827E-01
NNE	2.501E-02	2.220E-02	1.950E-02	1.812E-02	8.092E-02	1.709E-01	2.200E-01	2.790E-01	3.400E-01	4.019E-01	4.631E-01	5.225E-01
NE	1.172E-02	1.039E-02	9.282E-03	8.781E-03	4.048E-02	8.742E-02	1.137E-01	1.455E-01	1.783E-01	2.130E-01	2.475E-01	2.809E-01
ENE	1.505E-02	1.370E-02	1.213E-02	1.126E-02	5.036E-02	1.109E-01	1.482E-01	1.906E-01	2.343E-01	2.791E-01	3.224E-01	3.640E-01
E	2.142E-02	1.826E-02	1.539E-02	1.408E-02	6.140E-02	1.367E-01	1.881E-01	2.461E-01	3.051E-01	3.622E-01	4.172E-01	4.699E-01
ESE	9.007E-03	7.140E-03	5.759E-03	5.136E-03	2.216E-02	4.770E-02	6.571E-02	8.567E-02	1.052E-01	1.238E-01	1.416E-01	1.585E-01
SE	3.252E-03	2.643E-03	2.210E-03	2.041E-03	9.344E-03	1.962E-02	2.567E-02	3.369E-02	4.192E-02	4.995E-02	5.771E-02	6.519E-02
SSE	1.114E-02	1.006E-02	8.462E-03	7.536E-03	3.126E-02	6.749E-02	9.128E-02	1.172E-01	1.429E-01	1.675E-01	1.909E-01	2.131E-01
S	3.562E-02	3.184E-02	2.657E-02	2.358E-02	9.622E-02	2.012E-01	2.677E-01	3.419E-01	4.151E-01	4.865E-01	5.546E-01	6.194E-01
SSW	3.544E-02	3.054E-02	2.502E-02	2.203E-02	9.029E-02	1.901E-01	2.499E-01	3.151E-01	3.788E-01	4.428E-01	5.045E-01	5.630E-01
SW	1.307E-02	1.144E-02	9.673E-03	8.734E-03	3.758E-02	7.568E-02	8.989E-02	1.060E-01	1.220E-01	1.407E-01	1.592E-01	1.768E-01
WSW	1.190E-02	9.889E-03	8.066E-03	7.125E-03	2.964E-02	6.560E-02	9.001E-02	1.162E-01	1.420E-01	1.675E-01	1.917E-01	2.147E-01
W	1.777E-02	1.559E-02	1.287E-02	1.137E-02	4.678E-02	1.016E-01	1.384E-01	1.783E-01	2.185E-01	2.566E-01	2.928E-01	3.270E-01
WNW	7.742E-03	6.159E-03	4.957E-03	4.422E-03	1.914E-02	4.054E-02	5.265E-02	6.861E-02	8.419E-02	9.905E-02	1.132E-01	1.266E-01
NW	7.709E-03	6.167E-03	4.975E-03	4.394E-03	1.896E-02	4.089E-02	5.410E-02	6.984E-02	8.561E-02	1.006E-01	1.149E-01	1.284E-01
NNW	1.736E-02	1.366E-02	1.106E-02	1.010E-02	4.469E-02	9.400E-02	1.184E-01	1.466E-01	1.782E-01	2.098E-01	2.404E-01	2.697E-01

TOTAL DOSE COMMITMENT IS 2.520E+01 PERSON-REM/YR

WARNING--POPULATION FOOD INGESTION DOSES SHOWN  
 ABOVE HAVE NOT BEEN CORRECTED TO REFLECT POTENTIAL  
 FOOD EXPORT AND MAY EXCEED DOSES ACTUALLY RECEIVED  
 BY THE POPULATION OF THIS REGION. SEE SUMMARY  
 TABLE FOR THIS INFORMATION.

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS MEAT ING

EXPOSED ORGAN IS EFFECTIV

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	2.528E-05	2.244E-05	2.055E-05	2.037E-05	1.130E-04	3.313E-04	4.916E-04	6.510E-04	8.067E-04	9.638E-04	1.115E-03	1.261E-03
NNE	1.898E-05	1.734E-05	1.607E-05	1.596E-05	8.962E-05	2.733E-04	4.201E-04	5.682E-04	7.132E-04	8.566E-04	9.964E-04	1.131E-03
NE	9.054E-06	8.413E-06	8.087E-06	8.287E-06	4.842E-05	1.474E-04	2.240E-04	3.018E-04	3.784E-04	4.575E-04	5.352E-04	6.102E-04
ENE	1.166E-05	1.125E-05	1.083E-05	1.103E-05	6.447E-05	1.998E-04	3.030E-04	4.043E-04	5.044E-04	6.053E-04	7.021E-04	7.949E-04
E	1.643E-05	1.470E-05	1.338E-05	1.338E-05	7.696E-05	2.467E-04	3.863E-04	5.235E-04	6.578E-04	7.862E-04	9.091E-04	1.026E-03
ESE	6.983E-06	5.918E-06	5.276E-06	5.239E-06	2.997E-05	8.930E-05	1.371E-04	1.838E-04	2.280E-04	2.697E-04	3.093E-04	3.468E-04
SE	2.569E-06	2.276E-06	2.122E-06	2.168E-06	1.254E-05	3.527E-05	5.217E-05	7.113E-05	8.988E-05	1.079E-04	1.253E-04	1.419E-04
SSE	8.542E-06	8.059E-06	7.299E-06	7.126E-06	3.935E-05	1.225E-04	1.873E-04	2.488E-04	3.076E-04	3.630E-04	4.155E-04	4.652E-04
S	2.717E-05	2.527E-05	2.260E-05	2.186E-05	1.180E-04	3.599E-04	5.468E-04	7.253E-04	8.941E-04	1.056E-03	1.209E-03	1.353E-03
SSW	2.723E-05	2.469E-05	2.201E-05	2.138E-05	1.176E-04	3.519E-04	5.181E-04	6.739E-04	8.196E-04	9.636E-04	1.102E-03	1.232E-03
SW	1.030E-05	9.641E-06	9.059E-06	9.069E-06	5.076E-05	1.360E-04	1.800E-04	2.205E-04	2.583E-04	3.011E-04	3.431E-04	3.827E-04
WSW	9.148E-06	7.922E-06	7.055E-06	6.906E-06	3.936E-05	1.245E-04	1.892E-04	2.503E-04	3.084E-04	3.653E-04	4.190E-04	4.699E-04
W	1.350E-05	1.238E-05	1.109E-05	1.082E-05	6.097E-05	1.923E-04	2.918E-04	3.854E-04	4.764E-04	5.616E-04	6.418E-04	7.175E-04
WNW	5.925E-06	5.068E-06	4.580E-06	4.593E-06	2.676E-05	7.749E-05	1.112E-04	1.486E-04	1.837E-04	2.168E-04	2.481E-04	2.777E-04
NW	5.888E-06	5.005E-06	4.483E-06	4.433E-06	2.583E-05	7.744E-05	1.136E-04	1.505E-04	1.863E-04	2.198E-04	2.516E-04	2.816E-04
NNW	1.325E-05	1.097E-05	9.703E-06	9.707E-06	5.587E-05	1.642E-04	2.371E-04	3.072E-04	3.810E-04	4.532E-04	5.222E-04	5.881E-04

TOTAL DOSE COMMITMENT IS 5.152E-02 PERSON-REM/YR

WARNING--POPULATION FOOD INGESTION DOSES SHOWN  
 ABOVE HAVE NOT BEEN CORRECTED TO REFLECT POTENTIAL  
 FOOD EXPORT AND MAY EXCEED DOSES ACTUALLY RECEIVED  
 BY THE POPULATION OF THIS REGION. SEE SUMMARY  
 TABLE FOR THIS INFORMATION.

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS MEAT ING

EXPOSED ORGAN IS BONE

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	3.666E-04	3.218E-04	2.892E-04	2.806E-04	1.462E-03	3.961E-03	5.694E-03	7.460E-03	9.197E-03	1.096E-02	1.266E-02	1.430E-02
NNE	2.752E-04	2.490E-04	2.268E-04	2.206E-04	1.162E-03	3.264E-03	4.860E-03	6.504E-03	8.126E-03	9.737E-03	1.131E-02	1.283E-02
NE	1.305E-04	1.194E-04	1.122E-04	1.123E-04	6.159E-04	1.743E-03	2.578E-03	3.445E-03	4.304E-03	5.194E-03	6.070E-03	6.916E-03
ENE	1.679E-04	1.590E-04	1.491E-04	1.478E-04	8.071E-04	2.334E-03	3.467E-03	4.599E-03	5.724E-03	6.862E-03	7.955E-03	9.002E-03
E	2.373E-04	2.090E-04	1.857E-04	1.809E-04	9.681E-04	2.882E-03	4.416E-03	5.953E-03	7.464E-03	8.912E-03	1.030E-02	1.162E-02
ESE	1.005E-04	8.337E-05	7.209E-05	6.943E-05	3.706E-04	1.036E-03	1.564E-03	2.087E-03	2.585E-03	3.056E-03	3.503E-03	3.927E-03
SE	3.676E-05	3.168E-05	2.860E-05	2.842E-05	1.553E-04	4.122E-04	5.975E-04	8.096E-04	1.021E-03	1.224E-03	1.420E-03	1.608E-03
SSE	1.234E-04	1.148E-04	1.016E-04	9.647E-05	4.946E-04	1.430E-03	2.141E-03	2.830E-03	3.491E-03	4.116E-03	4.708E-03	5.268E-03
S	3.932E-04	3.610E-04	3.158E-04	2.976E-04	1.492E-03	4.210E-03	6.257E-03	8.250E-03	1.015E-02	1.197E-02	1.369E-02	1.533E-02
SSW	3.931E-04	3.506E-04	3.044E-04	2.874E-04	1.466E-03	4.093E-03	5.914E-03	7.656E-03	9.295E-03	1.092E-02	1.248E-02	1.394E-02
SW	1.475E-04	1.351E-04	1.230E-04	1.196E-04	6.277E-04	1.590E-03	2.066E-03	2.516E-03	2.939E-03	3.420E-03	3.894E-03	4.340E-03
WSW	1.320E-04	1.128E-04	9.775E-05	9.284E-05	4.886E-04	1.442E-03	2.155E-03	2.840E-03	3.496E-03	4.138E-03	4.745E-03	5.320E-03
W	1.957E-04	1.768E-04	1.544E-04	1.463E-04	7.601E-04	2.228E-03	3.323E-03	4.372E-03	5.396E-03	6.358E-03	7.265E-03	8.120E-03
WNW	8.566E-05	7.156E-05	6.243E-05	6.057E-05	3.284E-04	8.963E-04	1.266E-03	1.685E-03	2.081E-03	2.455E-03	2.809E-03	3.143E-03
NW	8.518E-05	7.099E-05	6.155E-05	5.893E-05	3.189E-04	8.971E-04	1.294E-03	1.708E-03	2.111E-03	2.490E-03	2.848E-03	3.187E-03
NNW	1.917E-04	1.561E-04	1.343E-04	1.308E-04	7.032E-04	1.929E-03	2.721E-03	3.501E-03	4.329E-03	5.141E-03	5.919E-03	6.661E-03

TOTAL DOSE COMMITMENT IS 5.894E-01 PERSON-REM/YR

WARNING--POPULATION FOOD INGESTION DOSES SHOWN  
 ABOVE HAVE NOT BEEN CORRECTED TO REFLECT POTENTIAL  
 FOOD EXPORT AND MAY EXCEED DOSES ACTUALLY RECEIVED  
 BY THE POPULATION OF THIS REGION. SEE SUMMARY  
 TABLE FOR THIS INFORMATION.

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS MILK ING

EXPOSED ORGAN IS EFFECTIV

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	3.645E-04	3.086E-04	2.595E-04	2.321E-04	8.889E-04	1.244E-03	1.078E-03	1.085E-03	1.153E-03	1.253E-03	1.365E-03	1.483E-03
NNE	2.734E-04	2.398E-04	2.055E-04	1.850E-04	7.161E-04	1.011E-03	8.930E-04	9.215E-04	9.995E-04	1.100E-03	1.211E-03	1.325E-03
NE	1.271E-04	1.105E-04	9.525E-05	8.629E-05	3.367E-04	4.715E-04	4.211E-04	4.475E-04	4.985E-04	5.628E-04	6.311E-04	6.998E-04
ENE	1.631E-04	1.447E-04	1.229E-04	1.082E-04	3.938E-04	5.227E-04	4.826E-04	5.334E-04	6.118E-04	7.021E-04	7.934E-04	8.832E-04
E	2.332E-04	1.945E-04	1.581E-04	1.377E-04	4.900E-04	6.400E-04	6.021E-04	6.795E-04	7.893E-04	9.059E-04	1.023E-03	1.137E-03
ESE	9.758E-05	7.507E-05	5.756E-05	4.813E-05	1.637E-04	2.043E-04	1.974E-04	2.273E-04	2.651E-04	3.041E-04	3.426E-04	3.798E-04
SE	3.495E-05	2.728E-05	2.150E-05	1.861E-05	6.960E-05	9.279E-05	8.545E-05	9.619E-05	1.116E-04	1.279E-04	1.443E-04	1.604E-04
SSE	1.213E-04	1.075E-04	8.726E-05	7.397E-05	2.484E-04	3.120E-04	2.932E-04	3.266E-04	3.729E-04	4.219E-04	4.708E-04	5.184E-04
S	3.885E-04	3.414E-04	2.759E-04	2.341E-04	7.834E-04	9.622E-04	8.747E-04	9.558E-04	1.080E-03	1.218E-03	1.358E-03	1.496E-03
SSW	3.854E-04	3.249E-04	2.555E-04	2.130E-04	6.940E-04	8.387E-04	7.700E-04	8.496E-04	9.638E-04	1.093E-03	1.224E-03	1.351E-03
SW	1.405E-04	1.193E-04	9.549E-05	8.091E-05	2.780E-04	3.583E-04	3.152E-04	3.232E-04	3.446E-04	3.777E-04	4.133E-04	4.485E-04
WSW	1.294E-04	1.056E-04	8.259E-05	6.894E-05	2.233E-04	2.709E-04	2.620E-04	3.027E-04	3.544E-04	4.094E-04	4.629E-04	5.144E-04
W	1.942E-04	1.672E-04	1.328E-04	1.112E-04	3.593E-04	4.238E-04	3.978E-04	4.550E-04	5.339E-04	6.155E-04	6.956E-04	7.726E-04
WNW	8.434E-05	6.497E-05	4.930E-05	4.096E-05	1.362E-04	1.642E-04	1.501E-04	1.739E-04	2.048E-04	2.369E-04	2.684E-04	2.987E-04
NW	8.405E-05	6.547E-05	5.017E-05	4.147E-05	1.390E-04	1.700E-04	1.585E-04	1.811E-04	2.117E-04	2.434E-04	2.746E-04	3.048E-04
NNW	1.893E-04	1.458E-04	1.131E-04	9.820E-05	3.575E-04	4.731E-04	4.155E-04	4.332E-04	4.810E-04	5.384E-04	5.984E-04	6.588E-04

TOTAL DOSE COMMITMENT IS 8.202E-02 PERSON-REM/YR

WARNING--POPULATION FOOD INGESTION DOSES SHOWN  
 ABOVE HAVE NOT BEEN CORRECTED TO REFLECT POTENTIAL  
 FOOD EXPORT AND MAY EXCEED DOSES ACTUALLY RECEIVED  
 BY THE POPULATION OF THIS REGION. SEE SUMMARY  
 TABLE FOR THIS INFORMATION.

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

EXPOSURE PATHWAY IS MILK ING

EXPOSED ORGAN IS BONE

DOSES SHOWN BELOW ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DIRECTION	XRHO 1.5	XRHO 2.5	XRHO 3.5	XRHO 4.5	XRHO 7.5	XRHO 15.0	XRHO 25.0	XRHO 35.0	XRHO 45.0	XRHO 55.0	XRHO 65.0	XRHO 75.0
N	3.778E-03	3.197E-03	2.686E-03	2.401E-03	9.158E-03	1.263E-02	1.073E-02	1.064E-02	1.118E-02	1.206E-02	1.307E-02	1.415E-02
NNE	2.833E-03	2.484E-03	2.128E-03	1.914E-03	7.379E-03	1.026E-02	8.877E-03	9.018E-03	9.680E-03	1.058E-02	1.159E-02	1.264E-02
NE	1.317E-03	1.144E-03	9.855E-04	8.918E-04	3.463E-03	4.765E-03	4.159E-03	4.352E-03	4.804E-03	5.392E-03	6.022E-03	6.660E-03
ENE	1.690E-03	1.498E-03	1.272E-03	1.118E-03	4.042E-03	5.244E-03	4.717E-03	5.141E-03	5.853E-03	6.690E-03	7.540E-03	8.380E-03
E	2.416E-03	2.015E-03	1.636E-03	1.423E-03	5.032E-03	6.419E-03	5.877E-03	6.540E-03	7.544E-03	8.626E-03	9.715E-03	1.079E-02
ESE	1.011E-03	7.772E-04	5.951E-04	4.968E-04	1.677E-03	2.038E-03	1.916E-03	2.178E-03	2.526E-03	2.889E-03	3.249E-03	3.598E-03
SE	3.620E-04	2.823E-04	2.222E-04	1.919E-04	7.132E-04	9.312E-04	8.368E-04	9.289E-04	1.069E-03	1.221E-03	1.374E-03	1.525E-03
SSE	1.257E-03	1.113E-03	9.031E-04	7.645E-04	2.551E-03	3.127E-03	2.863E-03	3.146E-03	3.568E-03	4.021E-03	4.475E-03	4.920E-03
S	4.026E-03	3.537E-03	2.856E-03	2.420E-03	8.052E-03	9.663E-03	8.552E-03	9.211E-03	1.033E-02	1.160E-02	1.290E-02	1.418E-02
SSW	3.993E-03	3.365E-03	2.643E-03	2.201E-03	7.119E-03	8.383E-03	7.489E-03	8.156E-03	9.194E-03	1.039E-02	1.162E-02	1.281E-02
SW	1.456E-03	1.235E-03	9.870E-04	8.349E-04	2.848E-03	3.596E-03	3.100E-03	3.140E-03	3.324E-03	3.624E-03	3.952E-03	4.277E-03
WSW	1.340E-03	1.094E-03	8.545E-04	7.122E-04	2.289E-03	2.696E-03	2.535E-03	2.895E-03	3.373E-03	3.887E-03	4.390E-03	4.873E-03
W	2.012E-03	1.732E-03	1.374E-03	1.149E-03	3.686E-03	4.220E-03	3.844E-03	4.342E-03	5.070E-03	5.832E-03	6.583E-03	7.307E-03
WNW	8.740E-04	6.728E-04	5.097E-04	4.226E-04	1.393E-03	1.632E-03	1.450E-03	1.658E-03	1.944E-03	2.244E-03	2.539E-03	2.824E-03
NW	8.710E-04	6.781E-04	5.189E-04	4.282E-04	1.424E-03	1.692E-03	1.535E-03	1.732E-03	2.013E-03	2.308E-03	2.601E-03	2.884E-03
NNW	1.962E-03	1.510E-03	1.170E-03	1.015E-03	3.672E-03	4.765E-03	4.087E-03	4.197E-03	4.618E-03	5.141E-03	5.695E-03	6.255E-03

TOTAL DOSE COMMITMENT IS 8.016E-01 PERSON-REM/YR

WARNING--POPULATION FOOD INGESTION DOSES SHOWN  
 ABOVE HAVE NOT BEEN CORRECTED TO REFLECT POTENTIAL  
 FOOD EXPORT AND MAY EXCEED DOSES ACTUALLY RECEIVED  
 BY THE POPULATION OF THIS REGION. SEE SUMMARY  
 TABLE FOR THIS INFORMATION.

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

SUMMARY PRINT OF POPULATION DOSES COMPUTED FOR TSTEP 1--DOSES SHOWN ARE ANNUAL POPULATION DOSE COMMITMENTS, PERSON-REM PER YEAR

DOSES RECEIVED BY PEOPLE WITHIN 80 KILOMETERS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	8.841E-01	2.114E-01	7.218E+00	1.054E-01	6.543E-02	2.855E+01
GROUND	6.508E-03	6.508E-03	6.508E-03	6.508E-03	6.508E-03	6.508E-03
CLOUD	1.803E-01	1.803E-01	1.803E-01	1.803E-01	1.803E-01	1.803E-01
VEG. ING	9.683E-02	1.084E+00	9.683E-02	3.396E-01	3.103E-01	9.683E-02
MEAT ING	3.837E-03	4.390E-02	3.837E-03	1.354E-02	1.157E-02	3.837E-03
MILK ING	2.856E-03	2.791E-02	2.856E-03	7.124E-03	1.033E-02	2.856E-03
RNPLUS50	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
TOTALS	1.174E+00	1.554E+00	7.508E+00	6.525E-01	5.844E-01	2.884E+01

DOSES RECEIVED BY PEOPLE BEYOND 80 KILOMETERS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
GROUND	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
CLOUD	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
VEG. ING	2.154E+00	2.411E+01	2.154E+00	7.555E+00	6.903E+00	2.154E+00
MEAT ING	4.768E-02	5.455E-01	4.768E-02	1.682E-01	1.437E-01	4.768E-02
MILK ING	7.916E-02	7.737E-01	7.916E-02	1.975E-01	2.865E-01	7.916E-02
RNPLUS50	2.239E+01	2.985E+02	4.229E+00	2.239E+01	2.239E+01	1.070E+02
TOTALS	2.467E+01	3.239E+02	6.510E+00	3.031E+01	2.972E+01	1.092E+02

TOTAL DOSES COMPUTED OVER ALL POPULATIONS

PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INHAL.	8.841E-01	2.114E-01	7.218E+00	1.054E-01	6.543E-02	2.855E+01
GROUND	6.508E-03	6.508E-03	6.508E-03	6.508E-03	6.508E-03	6.508E-03
CLOUD	1.803E-01	1.803E-01	1.803E-01	1.803E-01	1.803E-01	1.803E-01
VEG. ING	2.251E+00	2.520E+01	2.251E+00	7.895E+00	7.213E+00	2.251E+00
MEAT ING	5.152E-02	5.894E-01	5.152E-02	1.818E-01	1.553E-01	5.152E-02
MILK ING	8.202E-02	8.016E-01	8.202E-02	2.046E-01	2.968E-01	8.202E-02
RNPLUS50	2.239E+01	2.985E+02	4.229E+00	2.239E+01	2.239E+01	1.070E+02
TOTALS	2.584E+01	3.255E+02	1.402E+01	3.096E+01	3.031E+01	1.381E+02

INDIVIDUAL RECEPTOR PARTICULATE CONCENTRATIONS  
 AIRBORNE CONCENTRATIONS, PCI/M3

GROUND CONCENTRATIONS, PCI/M2

NO.	NAME	PTSZ	AIRBORNE CONCENTRATIONS, PCI/M3				GROUND CONCENTRATIONS, PCI/M2			
			U-238	Th-230	Ra-226	Pb-210	U-238	Th-230	Ra-226	Pb-210
1	Office Worker	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1	Office Worker	2	2.123E-02	5.838E-05	5.307E-05	1.059E-04	1.995E+04	5.485E+01	4.981E+01	4.981E+01
1	Office Worker	3	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1	Office Worker	4	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
CONCENTRATION TOTALS			2.123E-02	5.838E-05	5.307E-05	1.059E-04	1.995E+04	5.485E+01	4.981E+01	4.981E+01
2	Tailings Worker	1	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2	Tailings Worker	2	3.113E-03	8.560E-06	7.782E-06	1.553E-05	2.925E+03	8.044E+00	7.305E+00	7.305E+00
2	Tailings Worker	3	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2	Tailings Worker	4	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
CONCENTRATION TOTALS			3.113E-03	8.560E-06	7.782E-06	1.553E-05	2.925E+03	8.044E+00	7.305E+00	7.305E+00

REGION: Shootar  
METSET:

CODE: MILDOS-AREA (02/97)  
DATA: SITE1.MIL

PAGE 30  
01/03/06

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

INDIVIDUAL RECEPTOR RADON AND RADON DAUGHTER CONCENTRATIONS  
AIRBORNE CONCENTRATIONS, PCI/M3

GROUND CONCENTRATIONS, PCI/M2

NO.	Rn-222	Po-218	Pb-214	Bi-214	Pb-210	Bi-210	Po-210	WL	Po-218	Pb-214	Bi-214	Pb-210
1	6.632E+02	5.122E+02	1.004E+02	1.791E+01	4.551E-06	1.435E-09	1.331E-14	1.103E-03	4.057E+02	4.057E+02	4.057E+02	1.929E+00
2	3.189E+03	1.501E+03	9.780E+01	6.332E+00	5.772E-07	7.011E-11	3.695E-16	2.066E-03	1.189E+03	1.189E+03	1.189E+03	2.447E-01

TIME STEP NUMBER 1,

DURATION IN YRS IS... 5.0

NUMBER 1 NAME=Office Worker X= 0.1KM, Y= 0.2KM, Z= 0.0M, DIST= 0.2KM, IRTYPE= 1

40CFR190 ANNUAL DOSE COMMITMENTS COMPUTED FOR THIS LOCATION, MREM/YR

AGE	PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INFANT	TOTALS	9.40E+01	2.70E+00	7.75E+02	4.35E-01	1.90E+00	6.10E-02
CHILD	TOTALS	4.59E+01	6.14E+00	3.75E+02	4.38E-01	5.87E+00	6.10E-02
TEENAGE	TOTALS	2.47E+01	2.80E+01	1.96E+02	3.29E-01	5.82E+00	6.10E-02
ADULT	TOTALS	2.02E+01	9.23E+00	1.63E+02	2.48E-01	3.42E+00	6.10E-02

TOTAL ANNUAL DOSE COMMITMENTS COMPUTED FOR THIS LOCATION, MREM/YR

AGE	PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INFANT	TOTALS	1.44E+02	3.10E+00	7.75E+02	8.41E-01	2.29E+00	8.29E+02
CHILD	TOTALS	9.61E+01	6.53E+00	3.76E+02	8.39E-01	6.27E+00	8.29E+02
TEENAGE	TOTALS	7.48E+01	2.84E+01	1.96E+02	7.27E-01	6.22E+00	8.29E+02
ADULT	TOTALS	7.03E+01	9.63E+00	1.64E+02	6.45E-01	3.82E+00	8.29E+02

NUMBER 2 NAME=Tailings Worker X= -0.3KM, Y= 0.2KM, Z= 0.0M, DIST= 0.4KM, IRTYPE= 1

40CFR190 ANNUAL DOSE COMMITMENTS COMPUTED FOR THIS LOCATION, MREM/YR

AGE	PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INFANT	TOTALS	1.38E+01	3.96E-01	1.14E+02	6.38E-02	2.78E-01	8.95E-03
CHILD	TOTALS	6.74E+00	9.00E-01	5.50E+01	6.42E-02	8.61E-01	8.95E-03
TEENAGE	TOTALS	3.62E+00	4.11E+00	2.87E+01	4.83E-02	8.54E-01	8.95E-03
ADULT	TOTALS	2.96E+00	1.35E+00	2.39E+01	3.64E-02	5.02E-01	8.95E-03

TOTAL ANNUAL DOSE COMMITMENTS COMPUTED FOR THIS LOCATION, MREM/YR

AGE	PATHWAY	EFFECTIV	BONE	AVG.LUNG	LIVER	KIDNEY	BRONCHI
INFANT	TOTALS	2.53E+02	8.14E-01	1.14E+02	4.83E-01	6.96E-01	3.99E+03
CHILD	TOTALS	2.46E+02	1.32E+00	5.54E+01	4.83E-01	1.28E+00	3.99E+03
TEENAGE	TOTALS	2.43E+02	4.53E+00	2.91E+01	4.66E-01	1.27E+00	3.99E+03
ADULT	TOTALS	2.43E+02	1.77E+00	2.43E+01	4.54E-01	9.20E-01	3.99E+03

Program execution time = 2.31 seconds