

FILE COPY

STATE OF UTAH
DIVISION OF WATER QUALITY
DEPARTMENT OF ENVIRONMENTAL QUALITY
SALT LAKE CITY, UTAH

UTAH POLLUTANT DISCHARGE ELIMINATION SYSTEM (UPDES) PERMITS

Major Municipal Permit No. **UT0021628**
Storm Water Permit No. **UTR000000**

In compliance with provisions of the *Utah Water Quality Act, Title 19, Chapter 5, Utah Code Annotated ("UCA") 1953, as amended* (the "Act"),

SOUTH DAVIS SEWER DISTRICT SOUTH PLANT

is hereby authorized to discharge from its wastewater treatment facility to receiving waters named **JORDAN RIVER**,


and to discharge storm water,

in accordance with specific limitations, outfalls, and other conditions set forth herein.

This permit shall become effective on May 9, 2010

This permit expires at midnight on January 31, 2015

Signed this 9th day of May, 2010.

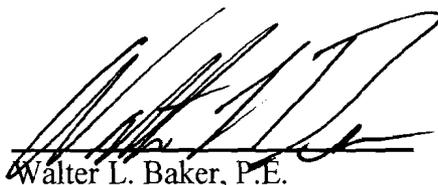

Walter L. Baker, P.E.
Executive Secretary
Utah Water Quality Board

Table of Contents

<u>Outline</u>	<u>Page Number</u>
I. DISCHARGE LIMITATIONS AND REPORTING REQUIREMENTS.....	1
A. Description of Discharge Point	1
B. Narrative Standard.....	1
C. Specific Limitations and Self-Monitoring Requirements.....	1
D. Reporting of Wastewater Monitoring Results	7
II. INDUSTRIAL PRETREATMENT PROGRAM.....	8
A. Pretreatment Program Delegation	8
B. Program Updates	9
C. Annual Report	9
D. General and Specific Prohibitions	10
E. Categorical Standards	10
F. Enforcement Notice.....	10
G. Formal Action.....	11
H. Self-Monitoring and Reporting Requirements	11
III. STORM WATER REQUIREMENTS	13
A. Coverage of This Section	13
B. Prohibition of Non-Storm Water Discharges	13
C. Storm Water Pollution Prevention Plan Requirements	13
D. Monitoring and Reporting Requirements.....	19
IV. MONITORING, RECORDING & GENERAL REPORTING REQUIREMENTS	21
A. Representative Sampling.....	21
B. Monitoring Procedures	21
C. Penalties for Tampering	21
D. Compliance Schedules	21
E. Additional Monitoring by the Permittee.....	21
F. Records Contents.....	21
G. Retention of Records	21
H. Twenty-four Hour Notice of Noncompliance Reporting	22
I. Other Noncompliance Reporting.....	23
J. Inspection and Entry.....	23
V. COMPLIANCE RESPONSIBILITIES.....	24
A. Duty to Comply.....	24
B. Penalties for Violations of Permit Conditions.....	24
C. Need to Halt or Reduce Activity not a Defense	24
D. Duty to Mitigate	24
E. Proper Operation and Maintenance	24
F. Removed Substances.....	24
G. Bypass of Treatment Facilities.....	25
H. Upset Conditions.....	26
VI. GENERAL REQUIREMENTS.....	28
A. Planned Changes	28
B. Anticipated Noncompliance	28
C. Permit Actions.....	28
D. Duty to Reapply.....	28
E. Duty to Provide Information	28
F. Other Information.....	28
G. Signatory Requirements	28
H. Penalties for Falsification of Report.....	29
I. Availability of Reports	30
J. Oil and Hazardous Substance Liability	30
K. Property Rights.....	30
L. Severability.....	30

DISCHARGE PERMIT NO. UT0021628

- M. Transfers..... 30
- N. State or Federal Laws 30
- O. Water Quality - Reopener Provision 31
- P. Biosolids – Reopener Provision 31
- Q. Toxicity Limitation - Reopener Provision..... 31
- R. Storm Water-Reopener Provision..... 32
- VII. DEFINITIONS 33
 - A. Wastewater 33
 - B. Biosolids..... 35
 - C. Storm Water. 37

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

I. DISCHARGE LIMITATIONS AND REPORTING REQUIREMENTS

- A. Description of Discharge Point. The authorization to discharge wastewater provided under this part is limited to those outfalls specifically designated below as discharge locations. Discharges at any location not authorized under a UPDES permit are violations of the *Act* and may be subject to penalties under the *Act*. Knowingly discharging from an unauthorized location or failing to report an unauthorized discharge may be subject to criminal penalties as provided under the *Act*.

Outfall Number
001

Location of Discharge Outfall
A 46" pipe on the west side of the facility discharges to the Jordan River at Latitude 40°50'33" and Longitude 111°56'30".

- B. Narrative Standard. It shall be unlawful, and a violation of this permit, for the permittee to discharge or place any waste or other substance in such a way as will be or may become offensive such as unnatural deposits, floating debris, oil, scum, or other nuisances such as color, odor or taste, or cause conditions which produce undesirable aquatic life or which produce objectionable tastes in edible aquatic organisms; or result in concentrations or combinations of substances which produce undesirable physiological responses in desirable resident fish, or other desirable aquatic life, or undesirable human health effects, as determined by a bioassay or other tests performed in accordance with standard procedures.
- C. Specific Limitations and Self-Monitoring Requirements.
1. Effective immediately, and lasting through the life of this permit, there shall be no acute toxicity in Outfall 001 as defined in *Part VIII*, and determined by test procedures described in *Part I. C.3.a* of this permit.
 2. Effective immediately and lasting the duration of this permit, the permittee is authorized to discharge from Outfall 001. Such discharges shall be limited and monitored by the permittee as specified below:

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

Parameter	Effluent Limitations			
	Maximum Monthly Avg.	Maximum Weekly Avg.	Daily Minimum	Daily Maximum
BOD ₅ , mg/L				
Summer (Jul-Sep)	20.0	27.0	NA	NA
Fall (Oct-Dec), Spring (Apr-Jun)	25.0	35.0	NA	NA
Winter (Jan-Mar)	25.0	35.0	NA	NA
BOD ₅ Min. % Removal	85	NA	NA	NA
TSS, mg/L	25	35	NA	NA
TSS Min. % Removal	85	NA	NA	NA
E. Coli, No./100mL	126	157	NA	NA
pH, Standard Units	NA	NA	6.5	9.0
Ammonia (as N), mg/L				
Summer (Jul-Sep)	15.0	30.0	NA	NA
Fall (Oct-Dec)	20.0	40.0	NA	NA
Winter (Jan-Mar)	15.0	30.0	NA	NA
Spring (Apr-Jun)	20.0	40.0	NA	NA
TRC, mg/L				
Summer (Jul-Sep)	NA	NA	NA	0.31
Fall (Oct-Dec), Spring (Apr-Jun)	NA	NA	NA	0.18
Winter (Jan-Mar)	NA	NA	NA	0.17
DO, mg/L	NA	NA	5.0	NA
Oil & Grease, mg/L (when sheen observed)	NA	NA	NA	10.0

NA – Not Applicable

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

Self-Monitoring and Reporting Requirements a/				
Parameter	Frequency	Sample Type	Units	Reporting
Total Flow b/ c/	Continuous	Recorder	MGD	Monthly
BOD ₅ , Influent d/ Effluent	3x Weekly	Composite	mg/L	Monthly
	3 x Weekly	Composite	mg/L	Monthly
TSS, Influent d/ Effluent	3 x Weekly	Composite	mg/L	Monthly
	3 x Weekly	Composite	mg/L	Monthly
E. Coli	3 x Weekly	Grab	No./100mL	Monthly
pH	Daily	Grab	SU	Monthly
Ammonia	3 x Weekly	Grab	mg/L	Monthly
TRC	Daily	Grab	mg/L	Monthly
DO	Daily	Grab	mg/L	Monthly
Phosphorus, Total e/	Monthly	Grab	mg/L	Monthly
Nitrate, NO ₃ e/	Monthly	Grab	mg/L	Monthly
Nitrite, NO ₂ e/	Monthly	Grab	mg/L	Monthly
WET, Acute Biomonitoring	Quarterly	Composite	Pass/Fail	Quarterly
Oil & Grease	Monthly If Sheen is Observed	Grab	mg/L	Monthly

- a/ See Definitions, *Part VII*, for definition of terms.
- b/ Flow measurements of influent/effluent volume shall be made in such a manner that the permittee can affirmatively demonstrate that representative values are being obtained.
- c/ If the rate of discharge is controlled, the rate and duration of discharge shall be reported.
- d/ In addition to monitoring the final discharge, influent samples shall be taken and analyzed for this constituent at the same frequency and sample as required for this constituent in the discharge.
- e/ Total Phosphorus, Nitrate (NO₃), and Nitrite (NO₂) are being sampled in support of the work being done for the TMDL currently underway for the Lower Jordan River. The Pollutants Of Concern will be monitored and reported by the facility on a monthly basis, but will not have a limit associated with them. Minimum sampling frequency requested is monthly, reporting the monthly average. If more sampling is done during the month, an average value should be reported. If weekly sampling is performed, and no significant changes to the process develop, sampling will no longer be required after 60 weeks (60 Samples) of sampling.

3. Acute/Chronic Whole Effluent Toxicity (WET) Testing.

- a. *Whole Effluent Testing – Acute Toxicity.* Starting on the effective date of this permit, the permittee shall conduct quarterly acute static replacement toxicity tests on a composite sample of the final effluent. The sample shall be collected at outfall 001.

The monitoring frequency for acute tests shall be quarterly unless a sample is found to be acutely toxic during a routine test. If that occurs, the monitoring

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

frequency shall become weekly (See *Part I.C.3, Accelerated Testing*). Samples shall be collected on a two day progression; i.e., if the first sample is on a Monday, during the next sampling period, the sampling shall begin on a Wednesday, etc.

The replacement static acute toxicity tests shall be conducted in general accordance with the procedures set out in the latest revision of *Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms, 5th Edition, (EPA 821/R/02/012), October 2002*, as per *40 CFR 136.3(a) TABLE 1A-LIST OF APPROVED BIOLOGICAL METHODS*, and the *Region VIII EPA NPDES Acute Test Conditions – Static Renewal Whole Effluent Toxicity Test (August, 1997)*. The permittee shall conduct the 48-hour static replacement toxicity test using Ceriodaphnia dubia and the acute 96-hour static replacement toxicity test using Pimephales promelas (fathead minnow). This will be done alternating quarterly between Ceriodaphnia dubia and Pimephales promelas (fathead minnow). A CO₂ atmosphere may be used (in conjunction with an unmodified test) in order to account for artificial pH drift, as previously demonstrated to and authorized by the Executive Secretary.

Acute toxicity occurs when 50 percent or more mortality is observed for either species at any effluent concentration. Mortality in the control must simultaneously be 10 percent or less for the results to be considered valid. If more than 10 percent control mortality occurs, the test shall be repeated until satisfactory control mortality is achieved. A variance to this requirement may be granted by the Executive Secretary if a mortality of less than 10 percent was observed in higher effluent dilutions.

If the permit contains a total residual chlorine limitation greater than 0.20 mg/L, the permittee may request from the Executive Secretary approval to de-chlorinate the sample, or collect the sample prior to chlorination.

Quarterly test results shall be reported along with the Discharge Monitoring Report (DMR) submitted for the end of the reporting calendar quarter e.g., biomonitoring results for the calendar quarter ending March 31 shall be reported with the DMR due April 28, with the remaining biomonitoring reports submitted with DMRs due each July 28, October 28, and January 28). All test results shall be reported along with the DMR submitted for that reporting period. The format for the report shall be consistent with the latest revision of the *Region VIII Guidance for Acute Whole Effluent Reporting (August, 1997)* and shall include all chemical and physical data as specified.

If the results for a minimum of ten consecutive tests indicate no acute toxicity, the permittee may request a reduction in testing frequency and/or reduction to one species. The Executive Secretary may approve, partially approve, or deny the request based on results and other available information. If approval is given, the modification will take place without a public notice.

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

- b. *Accelerated Testing.* When acute toxicity is indicated during routine biomonitoring as specified in this permit, the permittee shall notify the Executive Secretary in writing within five (5) days after becoming aware of the test result. The permittee shall perform an accelerated schedule of biomonitoring to establish whether a pattern of toxicity exists. Accelerated testing will begin within seven (7) days after the permittee becomes aware of the test result. Accelerated testing shall be conducted as specified under *Part I.C.3.c, Pattern of Toxicity*. If the accelerated testing demonstrates no pattern of toxicity, routine monitoring shall be resumed.
- c. *Pattern of Toxicity.* A pattern of toxicity is defined by the results of a series of up to five (5) biomonitoring tests pursuant to the accelerated testing requirements using 100 percent effluent on the single species found to be more sensitive, once every week for up to five (5) consecutive weeks.

If two (2) consecutive tests (not including the scheduled quarterly or monthly test which triggered the search for a pattern of toxicity) do not result in acute toxicity, no further accelerated testing will be required and no pattern of toxicity will be found to exist. The permittee will provide written verification to the Executive Secretary within five (5) days, and resume routine monitoring.

A pattern of toxicity is established if one of the following occurs:

- (1) If two (2) consecutive test results (not including the scheduled quarterly or monthly test, which triggered the search for a pattern of toxicity) indicate acute toxicity, this constitutes an established pattern of toxicity.
 - (2) If consecutive tests continue to yield differing results each time, the permittee will be required to conduct up to a maximum of five (5) acute tests (not including the scheduled quarterly or monthly test which triggered the search for a pattern of toxicity). If three out of five test results indicate acute toxicity, this will constitute an established pattern of toxicity.
- d. *Preliminary Toxicity Investigation.*
- (1) When a pattern of toxicity is detected the permittee will notify the Executive Secretary in writing within five (5) days and begin an evaluation of the possible causes of the toxicity. The permittee will have fifteen (15) working days from demonstration of the pattern to complete a Preliminary Toxicity Investigation (PTI) and submit a written report of the results to the Executive Secretary. The PTI may include, but is not limited to, additional chemical and biological monitoring, examination of pretreatment program records, examination of discharge monitoring reports, a thorough review of the testing protocol, evaluation of treatment processes and chemical use, inspection of material storage and transfer areas to determine if a spill may have occurred, and similar procedures.

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

- (2) If the PTI identifies a probable toxicant and/or a probable source of toxicity the permittee shall submit, as part of its final results written notification of that effect to the Executive Secretary. Within thirty (30) days of completing the PTI the permittee shall submit for approval a control program to control effluent toxicity and shall proceed to implement such a plan within seven (7) days following approval. The control program, as submitted to or revised by the Executive Secretary, may be incorporated into the permit.
 - (3) If no probable explanation for toxicity is identified in the PTI, the permittee shall notify the Executive Secretary as part of its final report, along with a schedule for conducting a Phase I Toxicity Reduction Evaluation (TRE) (See *Part I.C.3.e, Toxicity Reduction Evaluation*).
 - (4) If toxicity spontaneously disappears during the PTI, the permittee shall submit written notification to that effect to the Executive Secretary as part of the reporting requirements of paragraph a. of this section.
- e. *Toxicity Reduction Evaluation (TRE)*. If toxicity is detected during the life of this permit and it is determined by the Executive Secretary that a TRE is necessary, the permittee shall be so notified and shall initiate a TRE immediately thereafter. The purpose of the TRE will be to establish the cause of toxicity, locate the source(s) of the toxicity, and control or provide treatment for the toxicity.

A TRE may include but is not limited to one, all, or a combination of the following:

- (1) Phase I – Toxicity Characterization
- (2) Phase II – Toxicity Identification Procedures
- (3) Phase III – Toxicity Control Procedures
- (4) Any other appropriate procedures for toxicity source elimination and control.

If the TRE establishes that the toxicity cannot be immediately eliminated, the permittee shall submit a proposed compliance plan to the Executive Secretary. The plan shall include the proposed approach to control toxicity and a proposed compliance schedule for achieving control. If the approach and schedule are acceptable to the Executive Secretary, this permit may be reopened and modified.

If the TRE shows that the toxicity is caused by a toxicant(s) that may be controlled with specific numerical limitations, the permittee may:

PART I
DISCHARGE PERMIT NO. UT0021628
WASTEWATER

- (a) Submit an alternative control program for compliance with the numerical requirements.
- (b) If necessary, provide a modified biomonitoring protocol, which compensates for the pollutant(s) being controlled numerically.

If acceptable to the Executive Secretary, this permit may be reopened and modified to incorporate any additional numerical limitations, a modified compliance schedule if judged necessary by the Executive Secretary, and/or a modified biomonitoring protocol.

Failure to conduct an adequate TRE, or failure to submit a plan or program as described above, or the submittal of a plan or program judged inadequate by the Executive Secretary, shall be considered a violation of this permit.

- D. Reporting of Wastewater Monitoring Results. Monitoring results obtained during the previous month shall be summarized for each month and reported on a Discharge Monitoring Report Form (EPA No. 3320-1) or by NetDMR, post-marked or entered into NetDMR no later than the 28th day of the month following the completed reporting period. If no discharge occurs during the reporting period, "no discharge" shall be reported. Legible copies of these, and all other reports including whole effluent toxicity (WET) test reports required herein, shall be signed and certified in accordance with the requirements of *Signatory Requirements (see Part VII.G)*, and submitted by NetDMR, or to the Division of Water Quality at the following address:

Department of Environmental Quality
Division of Water Quality
PO Box 144870
Salt Lake City, Utah 84114-4870

PART II
DISCHARGE PERMIT NO. UT0021628
PRETREATMENT

II. INDUSTRIAL PRETREATMENT PROGRAM

- A. Pretreatment Program Delegation. The permittee has been delegated primary responsibility for enforcing against discharges prohibited by *40 CFR 403.5* and applying and enforcing any national Pretreatment Standards established by the United States Environmental Protection Agency in accordance with Section 307 (b) and (c) of *The Clean Water Act (CWA)*, as amended by *The Water Quality Act (WQA)*, of 1987.

The permittee shall implement the Industrial Pretreatment Program in accordance with the legal authorities, policies, and procedures described in the permittee's approved Pretreatment Program submission. Such program commits the permittee to do the following:

1. Carry out inspection, surveillance, and monitoring procedures, which will determine, independent of information supplied by the industrial user, whether the industrial user is in compliance with the pretreatment standards. At a minimum, all significant industrial users shall be inspected and sampled by the permittee at least once per year;
2. Control through permit, order, or similar means, the contribution to the POTW by each industrial user to ensure compliance with applicable pretreatment standards and requirements;
3. Require development, as necessary, of compliance schedules by each industrial user for the installation of control technologies to meet applicable pretreatment standards;
4. Maintain and update industrial user information as necessary, to ensure that all IUs are properly permitted and/or controlled at all times;
5. Enforce all applicable pretreatment standards and requirements and obtain appropriate remedies for noncompliance by any industrial user;
6. Annually publish a list of industrial users that were determined to be in significant noncompliance during the previous year. The notice must be published before March 28 of the following year;
7. Maintain an adequate revenue structure and staffing level for continued implementation of the Pretreatment Program.
8. Evaluate all significant industrial users at least once every two years to determine if they need to develop a slug prevention plan. If a slug prevention plan is required, the permittee shall insure that the plan contains at least the minimum elements required in *40 CFR 403.8(f)(2)(v)*;

PART II
DISCHARGE PERMIT NO. UT0021628
PRETREATMENT

9. Notify all significant industrial users of their obligation to comply with applicable requirements under *Subtitles C and D* of the *Resource Conservation and Recovery Act (RCRA)*; and
 10. Develop, implement, and maintain an enforcement response plan as required by *40 CFR 403.8(f)(5)* which shall, at a minimum,
 - a. Describe how the POTW will investigate instances of noncompliance;
 - b. Describe the types of escalating enforcement responses the POTW will take in response to all anticipated type of industrial user violations; and
 - c. Describe the time periods within which such responses will be taken and identify the POTW staff position(s) responsible for pursuing these actions.
 11. Establish and enforce specific local limits as necessary to implement the provisions of the *40 CFR Parts 403.5(a)* and *(b)*, and as required by *40 CFR Part 403.5(c)*.
- B. Program Updates. The permittee is required to modify its pretreatment program, as necessary, to reflect changes in the regulations of *40 CFR 403*. Such modifications shall be completed within the time frame set forth by the applicable regulations. Modification of the approved pretreatment program must be done in accordance with the requirements of *40 CFR 403.18*. Modifications of the approved program which result in less stringent industrial user requirements shall not be effective until after approval has been granted by the Executive Secretary.
- C. Annual Report. The permittee shall provide the Division of Water Quality and EPA with an annual report briefly describing the permittee's pretreatment program activities over the previous calendar year. Reports shall be submitted no later than March 28 of each year. These annual reports shall, at a minimum, include:
1. An updated listing of the permittee's industrial users.
 2. A descriptive summary of the compliance activities including numbers of any major enforcement actions, i.e., administrative orders, penalties, civil actions, etc.
 3. An assessment of the compliance status of the permittee's industrial users and the effectiveness of the permittee's Pretreatment Program in meeting its needs and objectives.
 4. A summary of all sampling data taken of the influent and effluent for those pollutants listed in *Part II.H*.
 5. A description of all substantive changes made to the permittee's pretreatment program referenced in *Section B* of this section. Substantive changes include, but are not limited to, any change in any ordinance, major modification in the

PART II
DISCHARGE PERMIT NO. UT0021628
PRETREATMENT

program's administrative structure or operating agreement(s), a significant reduction in monitoring, or a change in the method of funding the program.

6. Other information as may be determined necessary by the Executive Secretary.

- D. General and Specific Prohibitions. Pretreatment standards (*40 CFR 403.5*) specifically prohibit the introduction of the following pollutants into the waste treatment system from any source of non-domestic discharge:
1. Pollutants which create a fire or explosion hazard in the publicly owned treatment works (POTW), including, but not limited to, wastestreams with a closed cup flashpoint of less than 140°F (60°C);
 2. Pollutants, which will cause corrosive structural damage to the POTW, but in no case, discharges with a pH lower than 5.0;
 3. Solid or viscous pollutants in amounts which will cause obstruction to the flow in the POTW resulting in interference;
 4. Any pollutant, including oxygen demanding pollutants (BOD, etc.), released in a discharge at such volume or strength as to cause interference in the POTW;
 5. Heat in amounts, which will inhibit biological activity in the POTW, resulting in interference, but in no case, heat in such quantities that the influent to the sewage treatment works exceeds 104°F (40°C);
 6. Petroleum oil, nonbiodegradable cutting oil, or products of mineral oil origin in amounts that will cause interference or pass through;
 7. Pollutants, which result in the presence of toxic gases, vapor, or fumes within the POTW in a quantity that may cause worker health or safety problems;
 8. Any trucked or hauled pollutants, except at discharge points designated by the POTW; or
 9. Any pollutant that causes pass through or interference at the POTW.
 10. Any specific pollutant which exceeds any local limitation established by the POTW in accordance with the requirement of *40 CFR 403.5(c)* and *40 CFR 403.5(d)*.
- E. Categorical Standards. In addition to the general and specific limitations expressed in *Part A and D* of this section, applicable National Categorical Pretreatment Standards must be met by all industrial users of the POTW. These standards are published in the federal regulations at *40 CFR 405* et. seq.
- F. Enforcement Notice. *UCA 19-5-104* provides that the State may issue a notice to the POTW stating that a determination has been made that appropriate enforcement

PART II
DISCHARGE PERMIT NO. UT0021628
PRETREATMENT

action must be taken against an industrial user for noncompliance with any pretreatment requirements within 30 days. The issuance of such notice shall not be construed to limit the authority of the Executive Secretary.

G. Formal Action. The Executive Secretary retains the right to take legal action against any industrial user and/or POTW for those cases where a permit violation has occurred because of the failure of an industrial user to meet an applicable pretreatment standard.

H. Self-Monitoring and Reporting Requirements.

1. Influent and Effluent Monitoring and Reporting Requirements. The permittee shall sample and analyze both the influent and effluent quarterly, for the following parameters.

Metals Monitoring for Pretreatment Program				
Parameter	Sample Type	Frequency	Test Limit a./	Units
Total Arsenic	Composite	Quarterly	59	ug/L
Total Cadmium		Quarterly	0.8	
Total Chromium		Quarterly	46	
Total Copper		Quarterly	34	
Total Lead		Quarterly	19	
Total Cyanide	Grab	Quarterly	6	
Total Mercury	Composite/Grab	Quarterly	0.013	
Total Molybdenum	Composite	Quarterly		
Total Nickel		Quarterly	119	
Total Selenium		Quarterly	5.3	
Total Silver		Quarterly	42	
Total Zinc		Quarterly	407	

a./ The minimum detection limit (MDL) of the test method used for analysis must be below this limit, if a test method is not available the permittee must submit documentation to the Executive Secretary regarding the method that will be used.

In addition, the permittee shall analyze the treatment facility influent and effluent for the presence of the toxic pollutants listed in *40 CFR 122 Appendix D Table II (Organic Toxic Pollutants)* yearly. The pesticides fraction of *Appendix D, Table II* is suspended unless pesticides are expected to be present.

The results of the analyses of metals, cyanide and toxic organics shall be submitted along with the Discharge Monitoring Report (DMR) at the end of the earliest possible reporting period.

2. In accordance with the requirements of *40 CFR Part 403.5(c)*, the permittee shall determine if there is a need to develop or revise its local limits in order to implement the general and specific prohibitions of *40 CFR Part 403.5 (a)* and

PART II
DISCHARGE PERMIT NO. UT0021628
PRETREATMENT

Part 403.5 (b). A technical evaluation of the need to develop or revise local limits shall be submitted to the Division within **12 months** of the effective date of this permit. This evaluation should be conducted in accordance with the latest revision of the *Utah Model industrial Pretreatment Program, Section 4, Local Limits*. If a technical evaluation, which may be based on the *Utah Model Industrial Pretreatment Program, Section 4, Local Limits*, reveals that development or revision of local limits is necessary, the permittee shall submit the proposed local limits revision to the Division of Water Quality for approval, and after approval implement the new local limits, within **12 months** of the Division's determination that a revision is necessary.

III. STORM WATER REQUIREMENTS.

- A. Coverage of This Section. The requirements listed under this section shall apply to storm water discharges. Storm water discharges from the following portions of the facility may be eligible for coverage under this permit: biosolids drying beds, haul or access roads on which transportation of biosolids may occur, grit screen cleaning areas, chemical loading, unloading and storage areas, salt or sand storage areas, vehicle or equipment storage and maintenance areas, or any other wastewater treatment device or system, used in the storage, treatment, recycling, and reclamation of municipal or domestic sewage, including lands dedicated to the disposal of sewage sludge that are located within the confines of the facility that may have a reasonable expectation to contribute to pollutants in a storm water discharge.
- B. Prohibition of Non-Storm Water Discharges. Except for discharges identified in *Part I*, and discharges described below in this paragraph, non-storm water discharges are prohibited. The following non-storm water discharges may be authorized under this permit provided the non-storm water component of the discharge is in compliance with this section; discharges from fire fighting activities; fire hydrant flushing; potable water sources including waterline flushing; drinking fountain water; irrigation drainage and lawn watering; routine external building wash down water where detergents or other compounds have not been used in the process; pavement wash waters where spills or leaks of toxic or hazardous materials (including oils and fuels) have not occurred (unless all spilled material has been removed) and where detergents are not used; air conditioning condensate; uncontaminated compressor condensate; uncontaminated springs; uncontaminated ground water; and foundation or footing drains where flows are not contaminated with process materials such as solvents.
- C. Storm Water Pollution Prevention Plan Requirements. The permittee must have (on site) or develop and implement a storm water pollution prevention plan as a condition of this permit.
1. Contents of the Plan. The plan shall include, at a minimum, the following items:
 - a. *Pollution Prevention Team*. Each plan shall identify a specific individual or individuals within the facility organization as members of a storm water Pollution Prevention Team who are responsible for developing the storm water pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's storm water pollution prevention plan.
 - b. *Description of Potential Pollutant Sources*. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to storm water discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials, which may be reasonably expected to have the potential as a significant pollutant source. Each plan shall include, at a minimum:

PART III
STORM WATER PERMIT NO. UT000000

- (1) *Drainage.* A site map indicating drainage areas and storm water outfalls. For each area of the facility that generates storm water discharges associated with the waste water treatment related activity with a reasonable potential for containing significant amounts of pollutants, a prediction of the direction of flow and an identification of the types of pollutants that are likely to be present in storm water discharges associated with the activity. Factors to consider include the toxicity of the pollutant; quantity of chemicals used, produced or discharged; the likelihood of contact with storm water; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified. The site map shall include but not be limited to:
- (a) Drainage direction and discharge points from all wastewater associated activities including but not limited to grit screen cleaning, bio-solids drying beds and transport, chemical/material loading, unloading and storage areas, vehicle maintenance areas, salt or sand storage areas.
 - (b) Location of any erosion and sediment control structure or other control measures utilized for reducing pollutants in storm water runoff.
 - (c) Location of bio-solids drying beds where exposed to precipitation or where the transportation of bio-solids may be spilled onto internal roadways or tracked off site.
 - (d) Location where grit screen cleaning or other routinely performed industrial activities are located and are exposed to precipitation.
 - (e) Location of any handling, loading, unloading or storage of chemicals or potential pollutants such as caustics, hydraulic fluids, lubricants, solvents or other petroleum products, or hazardous wastes and where these may be exposed to precipitation.
 - (f) Locations where any major spills or leaks of toxic or hazardous materials have occurred.
 - (g) Location of any sand or salt piles.
 - (h) Location of fueling stations or vehicle and equipment maintenance and cleaning areas that are exposed to precipitation.
 - (i) Location of receiving streams or other surface water bodies.
 - (j) Locations of outfalls and the types of discharges contained in the drainage areas of the outfalls.

PART III
STORM WATER PERMIT NO. UT000000

- (2) *Inventory of Exposed Materials.* An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to storm water between the time of 3 years prior to the effective date of this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with storm water runoff between the time of 3 years prior to the effective date of this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in storm water runoff; and a description of any treatment the storm water receives.
- (3) *Spills and Leaks.* A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a storm water conveyance at the facility after the date of 3 years prior to the effective date of this permit. Such list shall be updated as appropriate during the term of the permit.
- (4) *Sampling Data.* A summary of existing discharge sampling data describing pollutants in storm water discharges from the facility, including a summary of sampling data collected during the term of this permit.
- (5) *Summary of Potential Pollutant Sources and Risk Assessment.* A narrative description of the potential pollutant sources from the following activities associated with treatment works: access roads/rail lines; loading and unloading operations; outdoor storage activities; material handling sites; outdoor vehicle storage or maintenance sites; significant dust or particulate generating processes; and onsite waste disposal practices. Specific potential pollutants shall be identified where known.
- (6) *Measures and Controls.* The permittee shall develop a description of storm water management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of storm water management controls shall address the following minimum components, including a schedule for implementing such controls:
 - (7) *Good Housekeeping.* All areas that may contribute pollutants to storm waters discharges shall be maintained in a clean, orderly manner. These are practices that would minimize the generation of pollutants at the source or before it would be necessary to employ sediment ponds or other control measures at the discharge outlets. Where applicable, such measures or other equivalent measures would include the following: sweepers and covered storage to minimize dust generation and storm runoff; conservation of vegetation where possible to minimize erosion;

PART III
STORM WATER PERMIT NO. UT000000

sweeping of haul roads, bio-solids access points, and exits to reduce or eliminate off site tracking; sweeping of sand or salt storage areas to minimize entrainment in storm water runoff; collection, removal, and proper disposal of waste oils and other fluids resulting from vehicle and equipment maintenance; other equivalent measures to address identified potential sources of pollution.

- (8) *Preventive Maintenance.* A preventive maintenance program shall involve timely inspection and maintenance of storm water management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- (9) *Spill Prevention and Response Procedures.* Areas where potential spills that can contribute pollutants to storm water discharges can occur, and their accompanying drainage points, shall be identified clearly in the storm water pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures and equipment for cleaning up spills shall be identified in the plan and made available to the appropriate personnel.
- (10) *Inspections.* In addition to the comprehensive site evaluation required under paragraph (*Part III.C.1.b.(16)*) of this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on a periodic basis. The following areas shall be included in all inspections: access roads/rail lines, equipment storage and maintenance areas (both indoor and outdoor areas); fueling; material handling areas, residual treatment, storage, and disposal areas; and wastewater treatment areas. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained. The use of a checklist developed by the facility is encouraged.
- (11) *Employee Training.* Employee training programs shall inform personnel responsible for implementing activities identified in the storm water pollution prevention plan or otherwise responsible for storm water management at all levels of responsibility of the components and goals of the storm water pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify how often training will take place, but training should be held at least annually (once per calendar year). Employee training must, at a minimum, address the following areas when applicable to a facility: petroleum product management; process chemical management; spill prevention and control; fueling procedures; general good housekeeping

PART III
STORM WATER PERMIT NO. UT000000

practices; proper procedures for using fertilizers, herbicides and pesticides.

- (12) *Record keeping and Internal Reporting Procedures.* A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of storm water discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- (13) *Non-storm Water Discharges.*
- (a) *Certification.* The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-storm water discharges. The certification shall include the identification of potential significant sources of non-storm water at the site, a description of the results of any test and/or evaluation for the presence of non-storm water discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with *Part VI.G* of this permit.
- (b) *Exceptions.* Except for flows from fire fighting activities, sources of non-storm water listed in *Part III.B. (Prohibition of Non-storm Water Discharges)* of this permit that are combined with storm water discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-storm water component(s) of the discharge.
- (c) *Failure to Certify.* Any facility that is unable to provide the certification required (testing for non-storm water discharges), must notify the *Executive Secretary* within 180 days after the effective date of this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-storm water discharges; the results of such test or other relevant observations; potential sources of non-storm water discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-storm water discharges to waters of the State, which are not, authorized by a *UPDES* permit are unlawful, and must be terminated.
- (14) *Sediment and Erosion Control.* The plan shall identify areas, which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.

PART III
STORM WATER PERMIT NO. UT000000

- (15) *Management of Runoff.* The plan shall contain a narrative consideration of the appropriateness of traditional storm water management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage storm water runoff in a manner that reduces pollutants in storm water discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to storm water discharges associated with industrial activity *Part III.C.1.b* (Description of Potential Pollutant Sources) of this permit] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected storm water (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, wet detention/retention devices and discharging storm water through the waste water facility for treatment.
- (16) *Comprehensive Site Compliance Evaluation.* Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the plan, but in no case less than once a year. Such evaluations shall provide:
- (a) Areas contributing to a storm water discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system. Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural storm water management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - (b) Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with *Part III.C.1.b* (Description of Potential Pollutant Sources) of this section and pollution prevention measures and controls identified in the plan in accordance with *Part III.C.1.b.(6)* (Measures and Controls) of this section shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
 - (c) A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the storm water pollution

PART III
STORM WATER PERMIT NO. UT000000

prevention plan, and actions taken in accordance with paragraph *i.* (above) shall be made and retained as part of the storm water pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the storm water pollution prevention plan and this permit. The report shall be signed in accordance with *Part VI.G* (Signatory Requirements) of this permit.

(17) *Deadlines for Plan Preparation and Compliance.* The permittee shall prepare and implement a plan in compliance with the provisions of this section within 270 days of the effective date of this permit. If the permittee already has a plan, it shall be revised according to *Part III.C.1.b.(16)*, Comprehensive Site Evaluation.

(18) *Keeping Plans Current.* The permittee shall amend the plan whenever there is a change in design, construction, operation, or maintenance, that has a significant effect on the potential for the discharge of pollutants to the waters of the state or if the storm water pollution prevention plan proves to be ineffective in eliminating or significantly minimizing pollutants from sources identified by the plan, or in otherwise achieving the general objective of controlling pollutants in storm water discharges associated with the activities at the facility.

D. Monitoring and Reporting Requirements.

1. Quarterly Visual Examination of Storm Water Quality. Facilities shall perform and document a visual examination of a storm water discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each of the following designated periods during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event: January through March; April through June; July through September; and October through December.

a. *Sample and Data Collection.* Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of storm water pollution. The examination must be conducted in a well lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.

PART III
STORM WATER PERMIT NO. UT000000

- b. *Visual Storm Water Discharge Examination Reports.* Visual examination reports must be maintained onsite in the pollution prevention plan. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the storm water discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of storm water pollution), and probable sources of any observed storm water contamination.

- c. *Representative Discharge.* When the permittee has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the observation data also applies to the substantially identical outfall(s) provided that the permittee includes in the storm water pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

- d. *Adverse Conditions.* When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the results of the visual examination. Adverse weather conditions, which may prohibit the collection of samples, include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

- e. *Inactive and Unstaffed Site.* When a discharger is unable to conduct visual storm water examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

PART IV
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UT00000

IV. MONITORING, RECORDING & GENERAL REPORTING REQUIREMENTS

- A. Representative Sampling. Samples taken in compliance with the monitoring requirements established under *Part I* shall be collected from the effluent stream prior to discharge into the receiving waters. Samples and measurements shall be representative of the volume and nature of the monitored discharge. Samples of biosolids shall be collected at a location representative of the quality of biosolids immediately prior to the use-disposal practice.
- B. Monitoring Procedures. Monitoring must be conducted according to test procedures approved under *Utah Administrative Code ("UAC") R317-2-10 and 40CFR Part 503*, unless other test procedures have been specified in this permit.
- C. Penalties for Tampering. The *Act* provides that any person who falsifies, tampers with, or knowingly renders inaccurate, any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than six months per violation, or by both.
- D. Compliance Schedules. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any Compliance Schedule of this permit shall be submitted no later than 14 days following each schedule date.
- E. Additional Monitoring by the Permittee. If the permittee monitors any parameter more frequently than required by this permit, using test procedures approved under *UAC R317-2-10 and 40 CFR 503* or as specified in this permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the DMR or the Biosolids Report Form. Such increased frequency shall also be indicated. Only those parameters required by the permit need to be reported.
- F. Records Contents. Records of monitoring information shall include:
1. The date, exact place, and time of sampling or measurements;
 2. The individual(s) who performed the sampling or measurements;
 3. The date(s) and time(s) analyses were performed;
 4. The individual(s) who performed the analyses;
 5. The analytical techniques or methods used; and,
 6. The results of such analyses.
- G. Retention of Records. The permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least five years from the date of the sample, measurement, report or application. This period may be extended by request of the Executive Secretary at any time. A copy of this UPDES permit must be maintained on site during the duration of activity at the permitted location

PART IV
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UT00000

H. Twenty-four Hour Notice of Noncompliance Reporting.

1. The permittee shall (orally) report any noncompliance including transportation accidents, spills, and uncontrolled runoff from biosolids transfer or land application sites which may seriously endanger health or environment, as soon as possible, but no later than twenty-four (24) hours from the time the permittee first became aware of circumstances. The report shall be made to the Division of Water Quality, (801) 538-6146, or 24-hour answering service (801) 536-4123.
2. The following occurrences of noncompliance shall be reported by telephone (801) 536-4123 as soon as possible but no later than 24 hours from the time the permittee becomes aware of the circumstances:
 - a. Any noncompliance which may endanger health or the environment;
 - b. Any unanticipated bypass, which exceeds any effluent limitation in the permit (See *Part V.G, Bypass of Treatment Facilities.*);
 - c. Any upset which exceeds any effluent limitation in the permit (See *Part V.H, Upset Conditions.*);
 - d. Violation of a maximum daily discharge limitation for any of the pollutants listed in the permit; or,
 - e. Violation of any of the Table 3 metals limits, the pathogen limits, the vector attraction reduction limits or the management practices for biosolids that have been sold or given away.
3. A written submission shall also be provided within five days of the time that the permittee becomes aware of the circumstances. The written submission shall contain:
 - a. A description of the noncompliance and its cause;
 - b. The period of noncompliance, including exact dates and times;
 - c. The estimated time noncompliance is expected to continue if it has not been corrected;
 - d. Steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance; and,
 - e. Steps taken, if any, to mitigate the adverse impacts on the environment and human health during the noncompliance period.

PART IV
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UT00000

4. The Executive Secretary may waive the written report on a case-by-case basis if the oral report has been received within 24 hours by the Division of Water Quality, (801) 538-6146.
 5. Reports shall be submitted to the addresses in *Part I.D, Reporting of Monitoring Results*.
- I. Other Noncompliance Reporting. Instances of noncompliance not required to be reported within 24 hours shall be reported at the time that monitoring reports for *Part I.D* are submitted. The reports shall contain the information listed in *Part IV.H.3*
- J. Inspection and Entry The permittee shall allow the Executive Secretary, or an authorized representative, upon the presentation of credentials and other documents as may be required by law, to:
1. Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of the permit;
 2. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
 3. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit, including but not limited to, biosolids treatment, collection, storage facilities or area, transport vehicles and containers, and land application sites;
 4. Sample or monitor at reasonable times, for the purpose of assuring permit compliance or as otherwise authorized by the *Act*, any substances or parameters at any location, including, but not limited to, digested biosolids before dewatering, dewatered biosolids, biosolids transfer or staging areas, any ground or surface waters at the land application sites or biosolids, soils, or vegetation on the land application sites; and,
 5. The permittee shall make the necessary arrangements with the landowner or leaseholder to obtain permission or clearance, the Executive Secretary, or authorized representative, upon the presentation of credentials and other documents as may be required by law, will be permitted to enter without delay for the purposes of performing their responsibilities.

PART V
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

V. COMPLIANCE RESPONSIBILITIES

- A. Duty to Comply. The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application. The permittee shall give advance notice to the Executive Secretary of any planned changes in the permitted facility or activity, which may result in noncompliance with permit requirements.
- B. Penalties for Violations of Permit Conditions. The *Act* provides that any person who violates a permit condition implementing provisions of the *Act* is subject to a civil penalty not to exceed \$10,000 per day of such violation. Any person who willfully or negligently violates permit conditions or the *Act* is subject to a fine not exceeding \$25,000 per day of violation. Any person convicted under *UCA 19-5-115(2)* a second time shall be punished by a fine not exceeding \$50,000 per day. Except as provided at *Part V.G, Bypass of Treatment Facilities* and *Part V.H, Upset Conditions*, nothing in this permit shall be construed to relieve the permittee of the civil or criminal penalties for noncompliance.
- C. Need to Halt or Reduce Activity not a Defense. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
- D. Duty to Mitigate. The permittee shall take all reasonable steps to minimize or prevent any discharge in violation of this permit, which has a reasonable likelihood of adversely affecting human health or the environment. The permittee shall also take all reasonable steps to minimize or prevent any land application in violation of this permit.
- E. Proper Operation and Maintenance. The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems, which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit.
- F. Removed Substances. Collected screening, grit, solids, sludge, or other pollutants removed in the course of treatment shall be disposed of in such a manner so as to prevent any pollutant from entering any waters of the state or creating a health hazard. Sludge/digester supernatant and filter backwash

PART V
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

shall not directly enter either the final effluent or waters of the state by any other direct route.

G. Bypass of Treatment Facilities.

1. Bypass Not Exceeding Limitations. The permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to paragraph 2 and 3 of this section.

2. Prohibition of Bypass.

a. Bypass is prohibited, and the Executive Secretary may take enforcement action against a permittee for bypass, unless:

(1) Bypass was unavoidable to prevent loss of human life, personal injury, or severe property damage;

(2) There were no feasible alternatives to bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate backup equipment should have been installed in the exercise of reasonable engineering judgement to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance, and

(3) The permittee submitted notices as required under *section V.G.3.*

b. The executive Secretary may approve an anticipated bypass, after considering its adverse effects, if the Executive Secretary determines that it will meet the three conditions listed in *sections V.G.2.a (1), (2) and (3).*

3. Notice.

a. *Anticipated bypass.* Except as provided above in *section V.G.2* and below in *section V.G.3.b*, if the permittee knows in advance of the need for a bypass, it shall submit prior notice, at least ninety days before the date of bypass. The prior notice shall include the following unless otherwise waived by the Executive Secretary:

(1) Evaluation of alternative to bypass, including cost-benefit analysis containing an assessment of anticipated resource damages:

PART V
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

- (2) A specific bypass plan describing the work to be performed including scheduled dates and times. The permittee must notify the Executive Secretary in advance of any changes to the bypass schedule;
 - (3) Description of specific measures to be taken to minimize environmental and public health impacts;
 - (4) A notification plan sufficient to alert all downstream users, the public and others reasonably expected to be impacted by the bypass;
 - (5) A water quality assessment plan to include sufficient monitoring of the receiving water before, during and following the bypass to enable evaluation of public health risks and environmental impacts; and,
 - (6) Any additional information requested by the Executive Secretary.
- b. *Emergency Bypass.* Where ninety days advance notice is not possible, the permittee must notify the Executive Secretary, and the Director of the Department of Natural Resources, as soon as it becomes aware of the need to bypass and provide to the Executive Secretary the information in *section V.G.3.a.(1) through (6)* to the extent practicable.
- c. *Unanticipated bypass.* The permittee shall submit notice of an unanticipated bypass to the Executive Secretary as required under *Part IV.H, Twenty Four Hour Reporting*. The permittee shall also immediately notify the Director of the Department of Natural Resources, the public and downstream users and shall implement measures to minimize impacts to public health and environment to the extent practicable.

H. Upset Conditions.

1. Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with technology based permit effluent limitations if the requirements of paragraph 2 of this section are met. Executive Secretary's administrative determination regarding a claim of upset cannot be judiciously challenged by the permittee until such time as an action is initiated for noncompliance.
2. Conditions necessary for a demonstration of upset. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:

PART V
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

- a. An upset occurred and that the permittee can identify the cause(s) of the upset;
 - b. The permitted facility was at the time being properly operated;
 - c. The permittee submitted notice of the upset as required under *Part IV.H, Twenty-four Hour Notice of Noncompliance Reporting*; and,
 - d. The permittee complied with any remedial measures required under *Part V.D, Duty to Mitigate*.
3. Burden of proof. In any enforcement proceeding, the permittee seeking to establish the occurrence of an upset has the burden of proof.

PART VI
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

VI. GENERAL REQUIREMENTS

- A. Planned Changes. The permittee shall give notice to the Executive Secretary as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required only when the alteration or addition could significantly change the nature or increase the quantity of parameters discharged or pollutant sold or given away. This notification applies to pollutants, which are not subject to effluent limitations in the permit. In addition, if there are any planned substantial changes to the permittee's existing sludge facilities or their manner of operation or to current sludge management practices of storage and disposal, the permittee shall give notice to the Executive Secretary of any planned changes at least 30 days prior to their implementation.
- B. Anticipated Noncompliance. The permittee shall give advance notice to the Executive Secretary of any planned changes in the permitted facility or activity, which may result in noncompliance with permit requirements.
- C. Permit Actions. This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance, does not stay any permit condition.
- D. Duty to Reapply. If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee shall apply for and obtain a new permit. The application shall be submitted at least 180 days before the expiration date of this permit.
- E. Duty to Provide Information. The permittee shall furnish to the Executive Secretary, within a reasonable time, any information which the Executive Secretary may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The permittee shall also furnish to the Executive Secretary, upon request, copies of records required to be kept by this permit.
- F. Other Information. When the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or any report to the Executive Secretary, it shall promptly submit such facts or information.
- G. Signatory Requirements. All applications, reports or information submitted to the Executive Secretary shall be signed and certified.

PART VI
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

1. All permit applications shall be signed by either a principal executive officer or ranking elected official.
2. All reports required by the permit and other information requested by the Executive Secretary shall be signed by a person described above or by a duly authorized representative of that person. A person is a duly authorized representative only if:
 - a. The authorization is made in writing by a person described above and submitted to the Executive Secretary, and,
 - b. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility, such as the position of plant manager, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters. A duly authorized representative may thus be either a named individual or any individual occupying a named position.
3. Changes to authorization. If an authorization under *paragraph VI.G.2* is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of *paragraph VI.G.2* must be submitted to the Executive Secretary prior to or together with any reports, information, or applications to be signed by an authorized representative.
4. Certification. Any person signing a document under this section shall make the following certification:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

- H. Penalties for Falsification of Reports. The *Act* provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or noncompliance shall, upon conviction be punished by a fine of not more than

PART VI
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

\$10,000.00 per violation, or by imprisonment for not more than six months per violation, or by both.

- I. Availability of Reports. Except for data determined to be confidential under *UAC R317-8-3.2*, all reports prepared in accordance with the terms of this permit shall be available for public inspection at the office of Executive Secretary. As required by the *Act*, permit applications, permits and effluent data shall not be considered confidential.
- J. Oil and Hazardous Substance Liability. Nothing in this permit shall be construed to preclude the permittee of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject under the *Act*.
- K. Property Rights. The issuance of this permit does not convey any property rights of any sort, or any exclusive privileges, nor does it authorize any injury to private property or any invasion of personal rights, nor any infringement of federal, state or local laws or regulations.
- L. Severability. The provisions of this permit are severable, and if any provisions of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.
- M. Transfers. This permit may be automatically transferred to a new permittee if:
 - 1. The current permittee notifies the Executive Secretary at least 20 days in advance of the proposed transfer date;
 - 2. The notice includes a written agreement between the existing and new permittee's containing a specific date for transfer of permit responsibility, coverage, and liability between them; and,
 - 3. The Executive Secretary does not notify the existing permittee and the proposed new permittee of his or her intent to modify, or revoke and reissue the permit. If this notice is not received, the transfer is effective on the date specified in the agreement mentioned in paragraph 2 above.
- N. State or Federal Laws. Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable state law or regulation under authority preserved by *UCA 19-5-117* and *Section 510* of the *Act* or any applicable Federal or State transportation regulations, such as but not limited to the Department of Transportation regulations.

PART VI
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

- O. Water Quality - Reopener Provision. This permit may be reopened and modified (following proper administrative procedures) to include the appropriate effluent limitations and compliance schedule, if necessary, if one or more of the following events occurs:
1. Water Quality Standards for the receiving water(s) to which the permittee discharges are modified in such a manner as to require different effluent limits than contained in this permit.
 2. A final wasteload allocation is developed and approved by the State and/or EPA for incorporation in this permit.
 3. Revisions to the current CWA § 208 areawide treatment management plans or promulgations/revisions to TMDLs (40 CFR 130.7) approved by the EPA and adopted by DWQ which calls for different effluent limitations than contained in this permit.
- P. Biosolids – Reopener Provision. This permit may be reopened and modified (following proper administrative procedures) to include the appropriate biosolids limitations (and compliance schedule, if necessary), management practices, other appropriate requirements to protect public health and the environment, or if there have been substantial changes (or such changes are planned) in biosolids use or disposal practices; applicable management practices or numerical limitations for pollutants in biosolids have been promulgated which are more stringent than the requirements in this permit; and/or it has been determined that the permittees biosolids use or land application practices do not comply with existing applicable state or federal regulations.
- Q. Toxicity Limitation - Reopener Provision. This permit may be reopened and modified (following proper administrative procedures) to include, whole effluent toxicity (WET) limitations, a compliance date, a compliance schedule, a change in the whole effluent toxicity (biomonitoring) protocol, additional or modified numerical limitations, or any other conditions related to the control of toxicants if one or more of the following events occur;
1. Toxicity is detected, as per *Part I.C.4.a* of this permit, during the duration of this permit.
 2. The TRE results indicate that compliance with the toxic limits will require an implementation schedule past the date for compliance and the Executive Secretary agrees with the conclusion.

PART VI
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

3. The TRE results indicate that the toxicant(s) represent pollutant(s) that may be controlled with specific numerical limits, and the Executive Secretary agrees that numerical controls are the most appropriate course of action.
 4. Following the implementation of numerical control(s) of toxicant(s), the Executive Secretary agrees that a modified biomonitoring protocol is necessary to compensate for those toxicant that are controlled numerically.
 5. The TRE reveals other unique conditions or characteristics, which in the opinion of the permit issuing authority justify the incorporation of unanticipated special conditions in the permit.
- R. Storm Water-Reopener Provision. At any time during the duration (life) of this permit, this permit may be reopened and modified (following proper administrative procedures) as per *UAC R317.8*, to include, any applicable storm water provisions and requirements, a storm water pollution prevention plan, a compliance schedule, a compliance date, monitoring and/or reporting requirements, or any other conditions related to the control of storm water discharges to "waters-of-State".

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

VII. DEFINITIONS

A. Wastewater.

1. The "7-day (and weekly) average", other than for e-coli bacteria, fecal coliform bacteria, and total coliform bacteria, is the arithmetic average of all samples collected during a consecutive 7-day period or calendar week, whichever is applicable. Geometric means shall be calculated for e-coli bacteria, fecal coliform bacteria, and total coliform bacteria. The 7-day and weekly averages are applicable only to those effluent characteristics for which there are 7-day average effluent limitations. The calendar week, which begins on Sunday and ends on Saturday, shall be used for purposes of reporting self-monitoring data on discharge monitoring report forms. Weekly averages shall be calculated for all calendar weeks with Saturdays in the month. If a calendar week overlaps two months (i.e., the Sunday is in one month and the Saturday in the following month), the weekly average calculated for that calendar week shall be included in the data for the month that contains Saturday.
2. The "30-day (and monthly) average," other than for e-coli bacteria, fecal coliform bacteria and total coliform bacteria, is the arithmetic average of all samples collected during a consecutive 30-day period or calendar month, whichever is applicable. Geometric means shall be calculated for e-coli bacteria, fecal coliform bacteria and total coliform bacteria. The calendar month shall be used for purposes of reporting self-monitoring data on discharge monitoring report forms.
3. "Act," means the *Utah Water Quality Act*.
4. "Acute toxicity" occurs when 50 percent or more mortality is observed for either test species at any effluent concentration.
5. "Bypass," means the diversion of waste streams from any portion of a treatment facility.
6. "Chronic toxicity" occurs when the survival, growth, or reproduction for either test species exposed to a dilution of 25 percent effluent (or lower) is significantly less (at the 95 percent confidence level) than the survival, growth, or reproduction of the control specimens.
7. "IC₂₅" is the concentration of toxicant (given in % effluent) that would cause a 25% reduction in mean young per female or a 25% reduction in overall growth for the test population.

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

8. "Composite Samples" shall be flow proportioned. The composite sample shall, as a minimum, contain at least four (4) samples collected over the compositing period. Unless otherwise specified, the time between the collection of the first sample and the last sample shall not be less than six (6) hours nor more than 24 hours. Acceptable methods for preparation of composite samples are as follows:
 - a. Constant time interval between samples, sample volume proportional to flow rate at time of sampling;
 - b. Constant time interval between samples, sample volume proportional to total flow (volume) since last sample. For the first sample, the flow rate at the time the sample was collected may be used;
 - c. Constant sample volume, time interval between samples proportional to flow (i.e., sample taken every "X" gallons of flow); and,
 - d. Continuous sample volume, with sample collection rate proportional to flow rate.
9. "CWA," means *The Federal Water Pollution Control Act*, as amended, by *The Clean Water Act of 1987*.
10. "Daily Maximum" (Daily Max.) is the maximum value allowable in any single sample or instantaneous measurement.
11. "EPA," means the United States Environmental Protection Agency.
12. "Executive Secretary," means Executive Secretary of the Utah Water Quality Board.
13. A "grab" sample, for monitoring requirements, is defined as a single "dip and take" sample collected at a representative point in the discharge stream.
14. An "instantaneous" measurement, for monitoring requirements, is defined as a single reading, observation, or measurement.
15. "Severe Property Damage," means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

16. "Upset," means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventative maintenance, or careless or improper operation.

B. Biosolids.

1. "Biosolids," means any material or material derived from sewage solids that have been biologically treated.
2. "Dry Weight-Basis," means 100 percent solids (i.e. zero percent moisture).
3. "Land Application" is the spraying or spreading of biosolids onto the land surface; the injection of biosolids below the land surface; or the incorporation of biosolids into the land so that the biosolids can either condition the soil or fertilize crops or vegetation grown in the soil. Land application includes distribution and marketing (i.e. the selling or giving away of the biosolids).
4. "Pathogen," means an organism that is capable of producing an infection or disease in a susceptible host.
5. "Pollutant" for the purposes of this permit is an organic substance, an inorganic substance, a combination of organic and inorganic substances, or pathogenic organisms that after discharge and upon exposure, ingestion, inhalation, or assimilation into an organism either directly from the environment or indirectly by ingestion through the food-chain, could on the basis of information available to the Administrator of EPA, cause death, disease, behavioral abnormalities, cancer, genetic mutations, physiological malfunctions (including malfunction in reproduction), or physical deformations in either organisms or offspring of the organisms.
6. "Runoff" is rainwater, leachate, or other liquid that drains over any part of a land surface and runs off the land surface.
7. "Similar Container" is either an open or closed receptacle. This includes, but is not limited to, a bucket, a box, a carton, and a vehicle or trailer with a load capacity of one metric ton or less.
8. "Total Solids" are the materials in the biosolids that remain as a residue if the biosolids are dried at 103° or 105° Celsius.

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

9. "Treatment Works" are either Federally owned, publicly owned, or privately owned devices or systems used to treat (including recycling and reclamation) either domestic sewage or a combination of domestic sewage and industrial waste or liquid manure.
10. "Vector Attraction" is the characteristic of biosolids that attracts rodents, flies mosquito's or other organisms capable of transporting infectious agents.
11. "Animals" for the purpose of this permit are domestic livestock.
12. "Annual Whole Sludge Application Rate" is the amount of sewage sludge (dry-weight basis) that can be applied to a unit area of land during a cropping cycle.
13. "Agronomic Rate is the whole sludge application rate (dry-weight basis) designed to: (1) provide the amount of nitrogen needed by the crop or vegetation grown on the land; and (2) minimize the amount of nitrogen in the sewage sludge that passes below the root zone of the crop or vegetation grown on the land to the ground water.
14. "Annual Pollutant Loading Rate" is the maximum amount of a pollutant (dry-weight basis) that can be applied to a unit area of land during a 365-day period.
15. "Application Site or Land Application Site" means all contiguous areas of a users' property intended for sludge application.
16. "Cumulative Pollutant Loading Rate" is the maximum amount of an inorganic pollutant (dry-weight basis) that can be applied to a unit area of land.
17. "Grit and Screenings" are sand, gravel, cinders, other materials with a high specific gravity and relatively large materials such as rags generated during preliminary treatment of domestic sewage at a treatment works and shall be disposed of according to *40 CFR 258*.
18. "High Potential for Public Contact Site" is land with a high potential for contact by the public. This includes, but is not limited to, public parks, ball fields, cemeteries, plant nurseries, turf farms, and golf courses.
19. "Low Potential for Public Contact Site" is the land with a low potential for contact by the public. This includes, but is not limited to, farms, ranches, reclamation areas, and other lands which are private lands, restricted

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

public lands, or lands which are not generally accessible to or used by the public.

20. "Monthly Average" is the arithmetic mean of all measurements taken during the month.
21. "Volatile Solids" is the amount of the total solids in sewage sludge lost when the sludge is combusted at 550 degrees Celsius for 15-20 minutes in the presence of excess air.

C. Storm Water.

1. "Best Management Practices" ("BMPs") means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of waters of the State. BMPs also include treatment requirements, operating procedures, and practices to control facility site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.
2. "Coal pile runoff" means the rainfall runoff from or through any coal storage pile.
3. "Co-located industrial activity" means when a facility has industrial activities being conducted onsite that are described under more than one of the coverage sections of *Appendix II* in the General Multi-Sector Permit for Storm Water Discharges Associated with Industrial Activity. Facilities with co-located industrial activities shall comply with all applicable monitoring and pollution prevention plan requirements of each section in which a co-located industrial activity is described.
4. "Commercial Treatment and Disposal Facilities" means facilities that receive, on a commercial basis, any produced hazardous waste (not their own) and treat or dispose of those wastes as a service to the generators. Such facilities treating and/or disposing exclusively residential hazardous wastes are not included in this definition.
5. "Landfill" means an area of land or an excavation in which wastes are placed for permanent disposal, and that is not a land application unit, surface impoundment, injection well, or waste pile.
6. "Land application unit" means an area where wastes are applied onto or incorporated into the soil surface (excluding manure spreading operations) for treatment or disposal.

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

7. “Municipal separate storm sewer system” (large and/or medium) means all municipal separate storm sewers that are either:
 - a. Located in an incorporated place (city) with a population of 100,000 or more as determined by the latest Decennial Census by the Bureau of Census (at the issuance date of this permit, Salt Lake City is the only city in Utah that falls in this category); or
 - b. Located in the counties with unincorporated urbanized populations of 100,000 or more, except municipal separate storm sewers that are located in the incorporated places, townships or towns within such counties (at the issuance date of this permit Salt Lake County is the only county that falls in this category); or
 - c. Owned or operated by a municipality other than those described in paragraph *a.* or *b.* (above) and that are designated by the *Executive Secretary* as part of the large or medium municipal separate storm sewer system.
8. “NOI” means ”notice of intent”, it is an application form that is used to obtain coverage under the General Multi-Sector Permit for Storm Water Discharges Associated with Industrial Activity.
9. “NOT” means “notice of termination”, it is a form used to terminate coverage under the General Multi-Sector Permit for Storm Water Discharges Associated with Industrial Activity.
10. “Point source” means any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel or other floating craft from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture or agricultural storm water runoff.
11. “Section 313 water priority chemical” means a chemical or chemical categories that:
 - a. Are listed at *40 CFR 372.65* pursuant to *Section 313* of the *Emergency Planning and Community Right-to-Know Act (EPCRA)* (also known as *Title III of the Superfund Amendments and Reauthorization Act (SARA)* of 1986);
 - b. Are present at or above threshold levels at a facility subject to *EPCRA Section 313* reporting requirements; and

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

c. Meet at least one of the following criteria:

- (1) Are listed in *Appendix D* of *40 CFR Part 122* on either Table II (organic priority pollutants), Table III (certain metals, cyanides, and phenols) or Table V (certain toxic pollutants and hazardous substances);
- (2) Are listed as a hazardous substance pursuant to *Section 311(b)(2)(A)* of the *CWA* at *40 CFR 116.4*; or
- (3) Are pollutants for which EPA has published acute or chronic water quality criteria. See *Appendix III* of this permit. This appendix was revised based on final rulemaking EPA published in the *Federal Register* November 30, 1994.

12. "Significant materials" includes, but is not limited to: raw materials; fuels; materials such as solvents, detergents, and plastic pellets; finished materials such as metallic products; raw materials used in food processing or production; hazardous substances designated under *Section 101(14)* of *CERCLA*; any chemical the facility is required to report pursuant to *EPCRA Section 313*; fertilizers; pesticides; and waste products such as ashes, slag and sludge that have the potential to be released with storm water discharges.
13. "Significant spills" includes, but is not limited to: releases of oil or hazardous substances in excess of reportable quantities under *Section 311 of the Clean Water Act* (see *40 CFR 110.10* and *CFR 117.21*) or *Section 102 of CERCLA* (see *40 CFR 302.4*).
14. "Storm water" means storm water runoff, snowmelt runoff, and surface runoff and drainage.
15. "SWDMR" means "storm water discharge monitoring report", a report of the results of storm water monitoring required by the permit. The Division of Water Quality provides the storm water discharge monitoring report form.
16. "Storm water associated with industrial activity" (*UAC R317-8-3.8(6)(c) & (d)*) means the discharge from any conveyance that is used for collecting and conveying storm water and that is directly related to manufacturing, processing or raw materials storage areas at an industrial plant. The term does not include discharges from facilities or activities excluded from the *UPDES* program. For the categories of industries identified in paragraphs (*a*) through (*j*) of this definition, the term

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

includes, but is not limited to, storm water discharges from industrial plant yards; immediate access roads and rail lines used or traveled by carriers of raw materials, manufactured products, waste material, or by-products used or created by the facility; material handling sites; refuse sites; sites used for the application or disposal of process waste waters (as defined in *40 CFR Part 401*); sites used for the storage and maintenance of material handling equipment; sites used for residual treatment, storage, or disposal; shipping and receiving areas; manufacturing buildings; storage areas (including tank farms) for raw materials, and intermediate and finished products; and areas where industrial activity has taken place in the past and significant materials remain and are exposed to storm water. For the categories of industries identified in paragraph *(k)* of this definition, the term includes only storm water discharges from all areas (except access roads and rail lines) listed in the previous sentence where material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, or industrial machinery are exposed to storm water. For the purposes of this paragraph, material handling activities include the storage, loading and unloading, transportation, or conveyance of any raw material, intermediate product, finished product, by-product or waste product. The term excludes areas located on plant lands separate from the plant's industrial activities, such as office buildings and accompanying parking lots as long as the drainage from the excluded areas is not mixed with storm water drained from the above described areas. Industrial facilities (including industrial facilities that are Federally, State, or municipally owned or operated that meet the description of the facilities listed in paragraphs *(a)* to *(k)* of this definition) include those facilities designated under *UAC R317-8-3.8(1)(a)5*. The following categories of facilities are considered to be engaging in "industrial activity" for purposes of this subsection:

- a. Facilities subject to storm water effluent limitations guidelines, new source performance standards, or toxic pollutant effluent standards under *40 CFR Subchapter N* (except facilities with toxic pollutant effluent standards that are exempted under category *(k)* of this definition);
- b. Facilities classified as Standard Industrial Classifications 24 (except 2434), 26 (except 265 and 267), 28 (except 283 and 285), 29, 311, 32 (except 323), 33, 3441, 373;
- c. Facilities classified as Standard Industrial Classifications 10 through 14 (mineral industry) including active or inactive mining operations (except for areas of coal mining operations no longer meeting the definition of a reclamation area under *40 CFR 434.11(l)*) because the performance bond issued to the facility by the appropriate SMCRA

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

authority has been released, or except for areas of non-coal mining operations that have been released from applicable State or Federal reclamation requirements after December 17, 1990) and oil and gas exploration, production, processing, or treatment operations, or transmission facilities that discharge storm water contaminated by contact with or that has come into contact with, any overburden, raw material, intermediate products, finished products, byproducts or waste products located on the site of such operations; inactive mining operations are mining sites that are not being actively mined, but that have an identifiable owner/operator;

- d. Hazardous waste treatment, storage, or disposal facilities, including those that are operating under interim status or a permit under Subtitle C of RCRA;
- e. Landfills, land application sites, and open dumps that have received any industrial wastes (waste that is received from any of the facilities described under this subsection) including those that are subject to regulation under *Subtitle D* of RCRA;
- f. Facilities involved in the recycling of materials, including metal scrapyards, battery reclaimers, salvage yards, and automobile junkyards, including but limited to those classified as Standard Industrial Classification 5015 and 5093;
- g. Steam electric power generating facilities, including coal handling sites;
- h. Transportation facilities classified as Standard Industrial Classifications 40, 41, 42 (except 4221-25), 43, 44, 45 and 5171 that have vehicle maintenance shops, equipment cleaning operations, or airport deicing operations. Only those portions of the facility that are either involved in vehicle maintenance (including vehicle rehabilitation, mechanical repairs, painting, fueling, and lubrication), equipment cleaning operations, airport deicing operations, or that are otherwise identified under paragraphs (a) to (g) or (I) to (k) of this subsection are associated with industrial activity;
- i. Treatment works treating domestic sewage or any other sewage sludge or wastewater treatment device or system, used in the storage treatment, recycling, and reclamation of municipal or domestic sewage, including land dedicated to the disposal of sewage sludge that are located within the confines of the facility, with a design flow of 1.0 mgd or more, or required to have an approved pretreatment program under *40 CFR Part 403*. Not included are farm lands, domestic

PART VII
DISCHARGE PERMIT NO. UT0021628
STORM WATER PERMIT NO. UTR000000

gardens or lands used for sludge management where sludge is beneficially reused and that are not physically located in the confines of the facility, or areas that are in compliance with *40 CFR Part 503*;

- j. Construction activity including clearing, grading and excavation activities except: operations that result in the disturbance of less than 5 acres of total land area that are not part of a larger common plan of development or sale;
- k. Facilities under Standard Industrial Classifications 20, 21, 22, 23, 2434, 25, 265, 267, 27, 283, 285, 30, 31 (except 311), 323, 34 (except 3441), 35, 36, 37 (except 373), 38, 39, 4221-25, (and that are not otherwise included within categories (a) to (j))

17. "Waste pile" means any non-containerized accumulation of solid, non-flowing waste that is used for treatment or storage.

**FACT SHEET STATEMENT OF BASIS
SOUTH DAVIS SEWER DISTRICT SOUTH TREATMENT PLANT
RENEWAL PERMIT: DISCHARGE, BIOSOLIDS & STORM WATER
UPDES PERMIT NUMBER: UT0021628
MAJOR MUNICIPAL**

FILE COPY

FACILITY CONTACTS

Dal D. Wayment, P.E., General Manager
Eddie D. Marsing, Plant Superintendent
Eric Nemeck, South Plant Lead Operator

Mailing Address: P.O. Box 140111
Salt Lake City, UT 84114-0111

Facility Address: 1380 West Center Street
North Salt Lake City, Utah 84054
(801) 936-8005

DESCRIPTION OF FACILITY

This facility was originally placed in service in 1962, and was most recently expanded and upgraded in 1994. The South Davis Sewer District South Plant (SDSS) serves the cities of North Salt Lake, Woods Cross and a portion of Bountiful. It has an average design flow of 4 million gallons per day (MGD) with a design population equivalent of 27,000. It utilizes a two-stage trickling filter treatment process with chlorination and dechlorination. The plant consists of fine screens, one grit chamber, three primary clarifiers, one primary trickling filter, one intermediate clarifier, two final trickling filters, two final clarifiers, two granular media filters (not in use), one chlorine contact chamber, a re-aeration basin, dechlorination, sludge gravity thickener, two anaerobic digesters run in series, and sludge drying beds. The facility is located in North Salt Lake City, Davis County, with Outfall 001 which discharges to the Jordan River at latitude 40° 50' 33" and longitude 111° 56'30" and STORET Number 499181.

SUMMARY OF CHANGES FROM PREVIOUS PERMIT

The discharge from this facility was evaluated for impact to the receiving waters as part of the normal permitting cycle five years ago. The permit renewal time is upon us. However, in as much as the Division is involved in a TMDL to evaluate and find solutions to the impairment of the beneficial resources of the river (dissolved oxygen and total dissolved solids), the development of new Wasteload Analysis for the 2010 permit reissuing cycle will be held in abeyance until the TMDL is completed. In the meantime, the permit will be re-issued using the current effluent values. There are no significant increases in concentrations or loadings expected.

When the results of the TMDL are available the permit will then be re-opened with a new wasteload analysis being conducted at that time with all effluent limits of the facility being re-evaluated.

DISCHARGE

DESCRIPTION OF DISCHARGE

<u>Outfall</u>	<u>Description of Discharge Point</u>
001	Located at latitude 40°50'33" and longitude 111°56'30". The discharge is through a concrete pipe leading from the chlorine contact basin directly to the Jordan River.

RECEIVING WATERS AND STREAM CLASSIFICATION

The discharge flows into the Jordan River, which is partially diverted into a canal that waters the Farmington Bay Waterfowl Management Area (FBWMA). All the water flows through this area or adjacent wetlands and finally into the Great Salt Lake. The Jordan River is Class 2B, 3B, 3D, and 4, the FBWMA is class 3C and 3D, and Farmington Bay of the Great Salt Lake is Class 5D, according to *Utah Administrative Code (UAC) R317-2-13*:

Class 2B	-Protected for secondary contact recreation such as boating, wading, or similar uses.
Class 3B	-Protected for warm water species of game fish and other warm water aquatic life, including the necessary aquatic organisms in their food chain.
Class 3C	-Protected for nongame fish and other aquatic life, including the necessary aquatic organisms in their food chain.
Class 3D	-Protected for waterfowl, shore birds and other water oriented wildlife not included in Class 3A, 3B, or 3C, including the necessary aquatic organisms in their food chain.
Class 4	-Protected for agricultural uses including irrigation of crops and stock watering.
Class 5D	- Protected for infrequent primary and secondary contact recreation, waterfowl, shore birds and other water-oriented wildlife including their necessary food chain.

BASIS FOR EFFLUENT LIMITATIONS

Limitations on total suspended solids (TSS), E. Coli, pH and percent removal for TSS and BOD₅ are based on current Utah Secondary Treatment Standards, *UAC R317-1-3.2*. Total residual chlorine (TRC), ammonia, biochemical oxygen demand (BOD₅) and DO limits are water quality based and derived from the Waste Load Analysis, (see ADDENDUM). The oil and grease limit is based on Best Professional Judgment.

Parameter	Effluent Limitations			
	Maximum Monthly Avg.	Maximum Weekly Avg.	Daily Minimum	Daily Maximum
BOD ₅ , mg/L				
Summer (Jul-Sep)	20.0	27.0	NA	NA
Fall (Oct-Dec), Spring (Apr-Jun)	25.0	35.0	NA	NA
Winter (Jan-Mar)	25.0	35.0	NA	NA
BOD ₅ Min. % Removal	85	NA	NA	NA
TSS, mg/L	25	35	NA	NA
TSS Min. % Removal	85	NA	NA	NA
E. Coli, No./100mL	126	157	NA	NA
pH, Standard Units	NA	NA	6.5	9.0
Ammonia (as N), mg/L				
Summer (Jul-Sep)	15.0	30.0	NA	NA
Fall (Oct-Dec)	20.0	40.0	NA	NA
Winter (Jan-Mar)	15.0	30.0	NA	NA
Spring (Apr-Jun)	20.0	40.0	NA	NA
TRC, mg/L				
Summer (Jul-Sep)	NA	NA	NA	0.31
Fall (Oct-Dec), Spring (Apr-Jun)	NA	NA	NA	0.18
Winter (Jan-Mar)	NA	NA	NA	0.17
DO, mg/L	NA	NA	5.0	NA
Oil & Grease, mg/L (when sheen observed)	NA	NA	NA	10.0

NA – Not Applicable.

SELF-MONITORING AND REPORTING REQUIREMENTS

The following self-monitoring requirements are the same as in the previous permit. The permit will require reports to be submitted monthly and quarterly, as applicable, on Discharge Monitoring Report (DMR) forms due 28 days after the end of the monitoring period. Lab sheets for biomonitoring must be attached to the biomonitoring DMR.

Self-Monitoring and Reporting Requirements				
Parameter	Frequency	Sample Type	Units	Reporting
Total Flow	Continuous	Recorder	MGD	Monthly
BOD ₅ , Influent a/ Effluent	3x Weekly	Composite	mg/L	Monthly
	3 x Weekly	Composite	mg/L	Monthly
TSS, Influent a/ Effluent	3 x Weekly	Composite	mg/L	Monthly
	3 x Weekly	Composite	mg/L	Monthly
E. Coli	3 x Weekly	Grab	No./100mL	Monthly
pH	Daily	Grab	SU	Monthly
Ammonia	3 x Weekly	Grab	mg/L	Monthly
TRC	Daily	Grab	mg/L	Monthly
DO	Daily	Grab	mg/L	Monthly
Phosphorus, Total b/	Monthly	Grab	mg/L	Monthly
Nitrate, NO ₃ b/	Monthly	Grab	mg/L	Monthly
Nitrite, NO ₂ b/	Monthly	Grab	mg/L	Monthly
WET, Acute Biomonitoring	Quarterly	Composite	Pass/Fail	Quarterly
Oil & Grease	Monthly If Sheen is Observed	Grab	mg/L	Monthly

a/ In addition to monitoring the final discharge, influent samples shall be taken and analyzed for this constituent at the same frequency as required for this constituent in the discharge.

b/ Total Phosphorus, Nitrate (NO₃), and Nitrite (NO₂) are being sampled in support of the work being done for the TMDL currently underway for the Lower Jordan River. The Pollutants Of Concern (POC's) will be monitored and reported by the facility on a monthly basis, but will not have a limit associated with them. Minimum sampling frequency requested is monthly, reporting the monthly average. If more sampling is done, an average value should be reported. At the end of each Calendar year, South Davis will report the results of all sampling done for the POC.

BIOSOLIDS

The South Davis Sewer District (SDSD) operates two wastewater treatment plants, the South Plant and North Plant, which have identical treatment systems. All biosolids produced and disposed at these two plants are permitted under South Davis North's UPDES Permit No. UT0021636. The two biosolids permits have been combined because the biosolids produced at both plants are often combined at the time of disposal and it increases efficiency, because only one annual report is required as opposed to two.

STORM WATER

STORMWATER REQUIREMENTS

Storm water provisions are included in this combined UPDES permit.

The storm water requirements are based on the UPDES Multi-Sector General Permit for Storm Water Discharges for Industrial Activity, General Permit No. UTR000000 (MSGP). All sections of the MSGP that pertain to discharges from wastewater treatment plants have been included and sections which are redundant or do not pertain have been deleted.

The permit requires the preparation and implementation of a storm water pollution prevention plan for all areas within the confines of the plant. Elements of this plan are required to include: 1. The development of a pollution prevention team: 2. Development of drainage maps and materials stockpiles: 3. An inventory of exposed materials: 4. Spill reporting and response procedures: 5. A preventative maintenance program: 6. Employee training: 7. Certification that storm water discharges are not mixed with non-storm water discharges: 8. Compliance site evaluations and potential pollutant source identification, and: 9. Visual examinations of storm water discharges.

South Davis Sewer District – South Plant is currently covered under the UPDES Multi Sector General Permit for Industrial Activities.

PRETREATMENT REQUIREMENTS

The pretreatment requirements remain the same as in the current permit with the permittee administering an approved pretreatment program. Any changes to the program must be submitted for approval to the Division of Water Quality. Authority to require a pretreatment program is provided for in *19-5-108 UCA, 1953 ann.* and *UAC R317-8-8.*

The permittee will be required to perform an evaluation of the need to revise or develop technically based local limits to implement the general and specific prohibitions of *40 CFR, Part 403.5(a)* and *Part 403.5(b)*. This evaluation may indicate that present local limits are sufficiently protective, or that they must be revised. As part of this evaluation, the permit requires quarterly influent and effluent monitoring for metals and yearly organic toxics listed in *R317-8-7.5* and sludge monitoring for potential pollutants listed in *40 CFR 503.*

BIOMONITORING REQUIREMENTS

A nationwide effort to control toxic discharges where effluent toxicity is an existing or potential concern is regulated in accordance with the *State of Utah Permitting and Enforcement Guidance Document for Whole Effluent Toxicity Control (biomonitoring)*. Authority to require effluent biomonitoring is provided in *Permit Conditions, UAC R317-8-4.2, Permit Provisions, UAC R317-8-5.3* and *Water Quality Standards, UAC R317-2-5* and *R317 -2-7.2.*

Since the permittee is classified as a major municipal discharger, the renewal permit will again require Whole Effluent Toxicity (WET) testing. Acute toxicity tests will be conducted quarterly, alternating between Ceriodaphnia dubia and Pimephales promelas (fathead minnows) species, as detailed in the permit. Alternating species has been previously granted to the permittee, and will continue in this permit renewal as well, based upon the absence of toxicity and the permitting authorities best professional judgment. Chronic WET testing has not been included once again based upon the absence of toxicity, the permitting authority's best professional judgment and because the discharge goes into a Class 5 receiving water. This rationale is consistent with similar permits and with the WET Guidance Document referenced above. A review of previous WET tests indicates no WET testing failures and no pattern of toxicity being established. Therefore, no changes are being proposed to the permittee's biomonitoring requirements.

The permit also contains standard requirements for accelerated testing upon failure of a WET test, and a PTI (Preliminary Toxicity Investigation) and TRE (Toxicity Reduction Evaluation) as necessary. The permit will also maintain the Toxicity Limitation Re-opener provision that allows for modification of the permit at any time to include additional WET testing requirements, limits and/or alternative test methods should additional information indicate the presence of toxicity in future discharges.

PERMIT DURATION

It is recommended that this permit be effective for a duration of five (5) years.

Drafted by Matthew Garn, P.E.
Utah Division of Water Quality
January 04, 2010

PUBLIC NOTICE

Began: March 15, 2010
Ended: April 15, 2010
Public Noticed in The Salt Lake Tribune and Deseret News

Comments were received and a copy of the comments and response to comments are attached to this document. No changes were made to the permit.



May 06, 2010

Utah Division of Water Quality
Salt Lake City, Utah

ADDENDUM

**Statement of Basis (Wasteload Analysis & TMDL)
Level I Antidegradation Review**

Date: December 23, 2009

Facilities: South Valley WWTP
Central Valley WWTP
South Davis South WWTP
South Davis North WWTP

Receiving water: Jordan River -> New State Canal

Finding of Insignificant Impact – Negative Declaration

The discharge from the above listed facilities were evaluated for impact to their receiving waters as a part of the normal permitting cycle five years ago. The permit renewal time is upon us. However, in as much as the Division is involved in a TMDL to evaluate and find solutions to the impairment of the beneficial resources of the river (dissolved oxygen and total dissolved solids), the development of new Wasteload Analyses for the 2010 permit reissuing cycle will be held in abeyance until the TMDL is completed. In the meantime, the permit writers will re-issue the permits now using current effluent values. There are no significant increases in concentrations nor loadings expected.

When the results of the TMDL are available the permits will be then be re-opened with the wasteload analyses being conducted at that time with all effluent limits of all facilities being re-evaluated.

It has been determined that these discharges will not cause a violation of water quality standards (Utah Water Quality Standards, R317-2-3.5.3.b. Utah Administrative Code in downstream receiving waters.

Additionally, wasteload allocations based upon water quality numeric criteria are not required with the effluent limits of the previous wasteloads being the basis for the current (Jan 2010) permit renewals.

Other permit limits should be set according to rules found in R-317-1.

Antidegradation Level I Review

An Anti-degradation Level II review is not required since the water quality of the receiving water will not be degraded by the proposed activity (e.g., a discharge to a dry wash where the effluent will not reach a stream or river; or, a UPDES permit is being renewed and the proposed effluent concentration value and pollutant loading is equal to or less than the existing effluent concentrations value and pollutant loading. [R317-2-3.4.1b.1]

Prepared by:
William O. Moellmer, Ph.D.
Utah Division of Water Quality



**Utah Division of Water Quality
Salt Lake City, Utah**

**Wasteload Analysis - Total Maximum Daily Load (TMDL)
Addendum: Statement of Basis**

9-Sep-09
3:00 PM

Facilities: South Davis South
Discharging to: Jordan River

UPDES No: UT- 0021628

I. Introduction

Wasteload analyses are performed to determine point source effluent limitations necessary to maintain designated beneficial uses by evaluating projected effects of discharge concentrations on in-stream water quality. The wasteload analysis also takes into account downstream designated uses [R317-2-8, UAC]. Projected concentrations are compared to numeric water quality standards to determine acceptability. The anti-degradation policy and procedures are also considered. The primary in-stream parameters of concern may include metals (as a function of hardness), total dissolved solids (TDS), total residual chlorine (TRC), un-ionized ammonia (as a function of pH and temperature, measured and evaluated in terms of total ammonia), and dissolved oxygen.

Mathematical water quality modeling is employed to determine stream quality response to point source discharges. Models aid in the effort of anticipating stream quality at future effluent flows at critical environmental conditions (e.g., low stream flow, high temperature, high pH, etc).

The numeric criteria in this wasteload analysis may always be modified by narrative criteria and other conditions determined by staff of the Division of Water Quality.

II. Receiving Water and Stream Classification

Jordan River:	2B, 3B, 4
Antidegradation Review:	Antidegradation Level II Review is not Required

III. Numeric Stream Standards for Protection of Aquatic Wildlife

Total Ammonia (TNH ₃)	Varies as a function of Temperature and pH Rebound. See Water Quality Standards
Chronic Total Residual Chlorine (TRC)	0.011 mg/l (4 Day Average) 0.019 mg/l (1 Hour Average)
Chronic Dissolved Oxygen (DO)	5.50 mg/l (30 Day Average) 4.00 mg/l (7Day Average) 3.00 mg/l (1 Day Average)
Maximum Total Dissolved Solids [See Water Quality Standards for special provisions]	1200.0 mg/l - Agricultural Use 2000.0 mg/l - Stock Watering 723.0 mg/l [Salinity Forum - Parker Dam]

**Utah Division of Water Quality
Salt Lake City, Utah**

Acute and Chronic Heavy Metals (Dissolved)

Parameter	4 Day Average (Chronic) Standard		1 Hour Average (Acute) Standard		
	Concentration	Load*	Concentration		Load*
Aluminum	87.00 ug/l**	2.902 lbs/day	750.00	ug/l	25.015 lbs/day
Arsenic	190.00 ug/l	6.337 lbs/day	360.00	ug/l	12.007 lbs/day
Cadmium	0.61 ug/l	0.020 lbs/day	6.52	ug/l	0.217 lbs/day
Chromium III	211.92 ug/l	7.068 lbs/day	4433.71	ug/l	147.879 lbs/day
ChromiumVI	11.00 ug/l	0.367 lbs/day	16.00	ug/l	0.534 lbs/day
Copper	23.85 ug/l	0.796 lbs/day	39.41	ug/l	1.315 lbs/day
Iron			1000.00	ug/l	33.353 lbs/day
Lead	12.88 ug/l	0.430 lbs/day	330.60	ug/l	11.027 lbs/day
Mercury	0.0120 ug/l	0.000 lbs/day	2.40	ug/l	0.080 lbs/day
Nickel	132.13 ug/l	4.407 lbs/day	1188.44	ug/l	39.638 lbs/day
Selenium	4.60 ug/l	0.153 lbs/day	20.00	ug/l	0.667 lbs/day
Silver	N/A ug/l	N/A lbs/day	25.04	ug/l	0.835 lbs/day
Zinc	303.93 ug/l	10.137 lbs/day	303.93	ug/l	10.137 lbs/day

* Allowed below discharge

**Chronic Aluminum standard applies only to waters with a pH < 7.0 and a Hardness < 50 mg/l as C.

Metals Standards Based upon a Hardness of 300 mg/l as CaCO3

Organics [Pesticides]

Parameter	4 Day Average (Chronic) Standard		1 Hour Average (Acute) Standard		
	Concentration	Load*	Concentration		Load*
Aldrin			1.500	ug/l	0.050 lbs/day
Chlordane	0.004 ug/l	4.480 lbs/day	1.200	ug/l	0.040 lbs/day
DDT, DDE	0.001 ug/l	1.042 lbs/day	0.550	ug/l	0.018 lbs/day
Dieldrin	0.002 ug/l	1.979 lbs/day	1.250	ug/l	0.042 lbs/day
Endosulfan	0.056 ug/l	58.342 lbs/day	0.110	ug/l	0.004 lbs/day
Endrin	0.002 ug/l	2.396 lbs/day	0.090	ug/l	0.003 lbs/day
Guthion			0.010	ug/l	0.000 lbs/day
Heptachlor	0.004 ug/l	3.959 lbs/day	0.260	ug/l	0.009 lbs/day
Lindane	0.080 ug/l	83.346 lbs/day	1.000	ug/l	0.033 lbs/day
Methoxychlor			0.030	ug/l	0.001 lbs/day
Mirex			0.010	ug/l	0.000 lbs/day
Parathion			0.040	ug/l	0.001 lbs/day
PCB's	0.014 ug/l	14.586 lbs/day	2.000	ug/l	0.067 lbs/day
Pentachlorophenol	13.00 ug/l	13543.690 lbs/day	20.000	ug/l	0.667 lbs/day
Toxephene	0.0002 ug/l	0.208 lbs/day	0.7300	ug/l	0.024 lbs/day

IV. Numeric Stream Standards for Protection of Agriculture

	4 Day Average (Chronic) Standard		1 Hour Average (Acute) Standard	
	Concentration	Load*	Concentration	Load*
TDS			1200.0 mg/l	20.01 tons/day
Arsenic			100.0 ug/l	lbs/day
Boron			750.0 ug/l	lbs/day
Cadmium			10.0 ug/l	0.17 lbs/day

**Utah Division of Water Quality
Salt Lake City, Utah**

Chromium	100.0 ug/l	lbs/day
Copper	200.0 ug/l	lbs/day
Lead	100.0 ug/l	lbs/day
Selenium	50.0 ug/l	lbs/day

V. Numeric Stream Standards for Protection of Human Health (Class 1C Waters)

Metals	4 Day Average (Chronic) Standard		1 Hour Average (Acute) Standard	
	Concentration	Load*	Concentration	Load*
Arsenic			ug/l	lbs/day
Barium			ug/l	lbs/day
Cadmium			ug/l	lbs/day
Chromium			ug/l	lbs/day
Lead			ug/l	lbs/day
Mercury			ug/l	lbs/day
Selenium			ug/l	lbs/day
Silver			ug/l	lbs/day
Fluoride (3)			ug/l	lbs/day
to			ug/l	lbs/day
Nitrates as N			ug/l	lbs/day

Chlorophenoxy Herbicides

2,4-D	ug/l	lbs/day
2,4,5-TP	ug/l	lbs/day
Endrin	ug/l	lbs/day
cyclohexane (Lindane)	ug/l	lbs/day
Methoxychlor	ug/l	lbs/day
Toxaphene	ug/l	lbs/day

VI. Numeric Stream Standards the Protection of Human Health from Water & Fish Consumption [Toxics]

Maximum Conc., ug/l - Acute Standards

Toxic Organics	Class 1C		Class 3A, 3B	
	[2 Liters/Day for 70 Kg Person over 70 Yr.]		[6.5 g for 70 Kg Person over 70 Yr.]	
Acenaphthene	ug/l	lbs/day	2700.0 ug/l	2812.92 lbs/day
Acrolein	ug/l	lbs/day	780.0 ug/l	812.62 lbs/day
Acrylonitrile	ug/l	lbs/day	0.7 ug/l	0.69 lbs/day
Benzene	ug/l	lbs/day	71.0 ug/l	73.97 lbs/day
Benzidine	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Carbon tetrachloride	ug/l	lbs/day	4.4 ug/l	4.58 lbs/day
Chlorobenzene	ug/l	lbs/day	21000.0 ug/l	21878.27 lbs/day
1,2,4-Trichlorobenzene				
Hexachlorobenzene	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
1,2-Dichloroethane	ug/l	lbs/day	99.0 ug/l	103.14 lbs/day
1,1,1-Trichloroethane				
Hexachloroethane	ug/l	lbs/day	8.9 ug/l	9.27 lbs/day
1,1-Dichloroethane				
1,1,2-Trichloroethane	ug/l	lbs/day	42.0 ug/l	43.76 lbs/day
1,1,2,2-Tetrachloroetha	ug/l	lbs/day	11.0 ug/l	11.46 lbs/day
Chloroethane			0.0 ug/l	0.00 lbs/day

**Utah Division of Water Quality
Salt Lake City, Utah**

Bis(2-chloroethyl) ether	ug/l	lbs/day	1.4 ug/l	1.46 lbs/day
2-Chloroethyl vinyl ethe	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
2-Chloronaphthalene	ug/l	lbs/day	4300.0 ug/l	4479.84 lbs/day
2,4,6-Trichlorophenol	ug/l	lbs/day	6.5 ug/l	6.77 lbs/day
p-Chloro-m-cresol			0.0 ug/l	0.00 lbs/day
Chloroform (HM)	ug/l	lbs/day	470.0 ug/l	489.66 lbs/day
2-Chlorophenol	ug/l	lbs/day	400.0 ug/l	416.73 lbs/day
1,2-Dichlorobenzene	ug/l	lbs/day	17000.0 ug/l	17710.98 lbs/day
1,3-Dichlorobenzene	ug/l	lbs/day	2600.0 ug/l	2708.74 lbs/day
1,4-Dichlorobenzene	ug/l	lbs/day	2600.0 ug/l	2708.74 lbs/day
3,3'-Dichlorobenzidine	ug/l	lbs/day	0.1 ug/l	0.08 lbs/day
1,1-Dichloroethylene	ug/l	lbs/day	3.2 ug/l	3.33 lbs/day
1,2-trans-Dichloroethyle	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
2,4-Dichlorophenol	ug/l	lbs/day	790.0 ug/l	823.04 lbs/day
1,2-Dichloropropane	ug/l	lbs/day	39.0 ug/l	40.63 lbs/day
1,3-Dichloropropylene	ug/l	lbs/day	1700.0 ug/l	1771.10 lbs/day
2,4-Dimethylphenol	ug/l	lbs/day	2300.0 ug/l	2396.19 lbs/day
2,4-Dinitrotoluene	ug/l	lbs/day	9.1 ug/l	9.48 lbs/day
2,6-Dinitrotoluene	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
1,2-Diphenylhydrazine	ug/l	lbs/day	0.5 ug/l	0.56 lbs/day
Ethylbenzene	ug/l	lbs/day	29000.0 ug/l	30212.85 lbs/day
Fluoranthene	ug/l	lbs/day	370.0 ug/l	385.47 lbs/day
4-Chlorophenyl phenyl ether				
4-Bromophenyl phenyl ether				
Bis(2-chloroisopropyl) e	ug/l	lbs/day	170000.0 ug/l	177109.79 lbs/day
Bis(2-chloroethoxy) me	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Methylene chloride (HM)	ug/l	lbs/day	1600.0 ug/l	1666.92 lbs/day
Methyl chloride (HM)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Methyl bromide (HM)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Bromoform (HM)	ug/l	lbs/day	360.0 ug/l	375.06 lbs/day
Dichlorobromomethane	ug/l	lbs/day	22.0 ug/l	22.92 lbs/day
Chlorodibromomethane	ug/l	lbs/day	34.0 ug/l	35.42 lbs/day
Hexachlorobutadiene(c)	ug/l	lbs/day	50.0 ug/l	52.09 lbs/day
Hexachlorocyclopentad	ug/l	lbs/day	17000.0 ug/l	17710.98 lbs/day
Isophorone	ug/l	lbs/day	600.0 ug/l	625.09 lbs/day
Naphthalene				
Nitrobenzene	ug/l	lbs/day	1900.0 ug/l	1979.46 lbs/day
2-Nitrophenol	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
4-Nitrophenol	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
2,4-Dinitrophenol	ug/l	lbs/day	14000.0 ug/l	14585.51 lbs/day
4,6-Dinitro-o-cresol	ug/l	lbs/day	765.0 ug/l	796.99 lbs/day
N-Nitrosodimethylamine	ug/l	lbs/day	8.1 ug/l	8.44 lbs/day
N-Nitrosodiphenylamine	ug/l	lbs/day	16.0 ug/l	16.67 lbs/day
N-Nitrosodi-n-propylam	ug/l	lbs/day	1.4 ug/l	1.46 lbs/day
Pentachlorophenol	ug/l	lbs/day	8.2 ug/l	8.54 lbs/day
Phenol	ug/l	lbs/day	4.6E+06 ug/l	4.79E+06 lbs/day
Bis(2-ethylhexyl)phthalate	ug/l	lbs/day	5.9 ug/l	6.15 lbs/day
Butyl benzyl phthalate	ug/l	lbs/day	5200.0 ug/l	5417.48 lbs/day
Di-n-butyl phthalate	ug/l	lbs/day	12000.0 ug/l	12501.87 lbs/day
Di-n-octyl phthlate				
Diethyl phthalate	ug/l	lbs/day	120000.0 ug/l	125018.68 lbs/day

**Utah Division of Water Quality
Salt Lake City, Utah**

Dimethyl phthlate	ug/l	lbs/day	2.9E+06 ug/l	3.02E+06 lbs/day
Benzo(a)anthracene (P)	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Benzo(a)pyrene (PAH)	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Benzo(b)fluoranthene (I)	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Benzo(k)fluoranthene (f)	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Chrysene (PAH)	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Acenaphthylene (PAH)				
Anthracene (PAH)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Dibenzo(a,h)anthracene	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Indeno(1,2,3-cd)pyrene	ug/l	lbs/day	0.0 ug/l	0.03 lbs/day
Pyrene (PAH)	ug/l	lbs/day	11000.0 ug/l	11460.05 lbs/day
Tetrachloroethylene	ug/l	lbs/day	8.9 ug/l	9.27 lbs/day
Toluene	ug/l	lbs/day	200000.0 ug/l	208364.46 lbs/day
Trichloroethylene	ug/l	lbs/day	81.0 ug/l	84.39 lbs/day
Vinyl chloride	ug/l	lbs/day	525.0 ug/l	546.96 lbs/day
				lbs/day
				lbs/day
Pesticides				
Aldrin	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Dieldrin	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Chlordane	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
4,4'-DDT	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
4,4'-DDE	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
4,4'-DDD	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
alpha-Endosulfan	ug/l	lbs/day	2.0 ug/l	2.08 lbs/day
beta-Endosulfan	ug/l	lbs/day	2.0 ug/l	2.08 lbs/day
Endosulfan sulfate	ug/l	lbs/day	2.0 ug/l	2.08 lbs/day
Endrin	ug/l	lbs/day	0.8 ug/l	0.84 lbs/day
Endrin aldehyde	ug/l	lbs/day	0.8 ug/l	0.84 lbs/day
Heptachlor	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Heptachlor epoxide				
PCB's				
PCB 1242 (Arochlor 1242)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
PCB-1254 (Arochlor 1254)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
PCB-1221 (Arochlor 1221)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
PCB-1232 (Arochlor 1232)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
PCB-1248 (Arochlor 1248)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
PCB-1260 (Arochlor 1260)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
PCB-1016 (Arochlor 1016)	ug/l	lbs/day	0.0 ug/l	0.00 lbs/day
Pesticide				
Toxaphene	ug/l		0.0 ug/l	0.00 lbs/day
Dioxin				
Dioxin (2,3,7,8-TCDD)	ug/l	lbs/day		
Metals				
Antimony	ug/l	lbs/day		
Arsenic	ug/l	lbs/day	4300.00 ug/l	4479.84 lbs/day
Asbestos	ug/l	lbs/day		

**Utah Division of Water Quality
Salt Lake City, Utah**

Beryllium				
Cadmium				
Chromium (III)				
Chromium (VI)				
Copper				
Cyanide	ug/l	lbs/day	2.2E+05 ug/l	229200.91 lbs/day
Lead	ug/l	lbs/day		
Mercury			0.15 ug/l	0.16 lbs/day
Nickel			4600.00 ug/l	4792.38 lbs/day
Selenium	ug/l	lbs/day		
Silver	ug/l	lbs/day		
Thallium			6.30 ug/l	6.56 lbs/day
Zinc				

There are additional standards that apply to this receiving water, but were not considered in this modeling/waste load allocation analysis.

VII. Mathematical Modeling of Stream Quality

Model configuration was accomplished utilizing standard modeling procedures. Data points were plotted and coefficients adjusted as required to match observed data as closely as possible.

The modeling approach used in this analysis included one or a combination of the following models.

- (1) The Utah River Model, Utah Division of Water Quality, 1992. Based upon STREAMDO IV (Region VIII) and Supplemental Ammonia Toxicity Models; EPA Region VIII, Sept. 1990 and QUAL2E (EPA, Athens, GA).
- (2) Utah Ammonia/Chlorine Model, Utah Division of Water Quality, 1992.
- (3) AMMTOX Model, University of Colorado, Center of Limnology, and EPA Region 8
- (4) Principles of Surface Water Quality Modeling and Control. Robert V. Thomann, et.al. Harper Collins Publisher, Inc. 1987, pp. 644.

Coefficients used in the model were based, in part, upon the following references:

- (1) Rates, Constants, and Kinetics Formulations in Surface Water Quality Modeling. Environmental Research Laboratory, Office of Research and Development, U.S. Environmental Protection Agency, Athens Georgia. EPA/600/3-85/040 June 1985.
- (2) Principles of Surface Water Quality Modeling and Control. Robert V. Thomann, et.al. Harper Collins Publisher, Inc. 1987, pp. 644.

VIII. Modeling Information

**Utah Division of Water Quality
Salt Lake City, Utah**

The required information for the model may include the following information for both the upstream conditions at low flow and the effluent conditions:

Flow, Q, (cfs or MGD)	D.O. mg/l
Temperature, Deg. C.	Total Residual Chlorine (TRC), mg/l
pH	Total NH3-N, mg/l
BOD5, mg/l	Total Dissolved Solids (TDS), mg/l
Metals, ug/l	Toxic Organics of Concern, ug/l

Other Conditions

In addition to the upstream and effluent conditions, the models require a variety of physical and biological coefficients and other technical information. In the process of actually establishing the permit limits for an effluent, values are used based upon the available data, model calibration, literature values, site visits and best professional judgement.

Model Inputs

The following is upstream and discharge information that was utilized as inputs for the analysis. Dry washes are considered to have an upstream flow equal to the flow of the discharge.

Upstream Information

	Stream							
	Flow	Temp.	pH	T-NH3	BOD5	DO	TRC	TDS
	cfs	Deg. C		mg/l as N	mg/l	mg/l	mg/l	mg/l
Summer	187.1	20.0	8.2	0.10	0.50	7.08	0.00	1100.0
Fall	103.8	12.0	8.1	0.10	0.50		0.00	1100.0
Winter	95.8	8.0	8.0	0.10	0.50		0.00	1100.0
Spring	255.8	12.0	8.1	0.10	0.50			
Dissolved Metals	Al	As	Cd	CrIII	CrVI	Copper	Fe	Pb
	ug/l	ug/l	ug/l	ug/l	ug/l	ug/l	ug/l	ug/l
All Seasons	1.59*	0.53*	0.053*	0.53*	2.65*	0.53*	0.83*	0.53*
Dissolved Metals	Hg	Ni	Se	Ag	Zn	Boron		
	ug/l	ug/l	ug/l	ug/l	ug/l	ug/l		
All Seasons	0.0001	0.53*	1.06*	0.1*	0.053*	10.0		* 1/2 MDL

Discharge Information

Season	Flow, MGD	Temp.
All Seasons	4.00000	22.0

All model numerical inputs, intermediate calculations, outputs and graphs are available for discussion, inspection and copy at the Division of Water Quality.

IX. Effluent Limitations

**Utah Division of Water Quality
Salt Lake City, Utah**

Current State water quality standards are required to be met under a variety of conditions including in-stream flows targeted to the 7-day, 10-year low flow (R317-2-9).

Other conditions used in the modeling effort coincide with the environmental conditions expected at low stream flows.

Effluent Limitation for Flow based upon Water Quality Standards

In-stream criteria of downstream segments will be met with an effluent flow maximum value as follows:

All Seasons

Not to Exceed:	4.000 MGD	Daily Average
	6.188 cfs	Daily Average

Flow Requirement or Loading Requirement

The calculations in this wasteload analysis utilize the maximum effluent discharge flow of 4 MGD. If the discharger is allowed to have a flow greater than 4 MGD during 7Q10 conditions, and effluent limit concentrations as indicated, then water quality standards will be violated. In order to prevent this from occurring the permit writers must include the discharge flow limitation as indicated above; or, include loading effluent limits in the permit.

Effluent Limitation for Whole Effluent Toxicity (WET) based upon WET Policy

Effluent Toxicity will not occur in downstream segments if the values below are met.

WET Requirements	LC50 >	22.0% Effluent	[Acute]
	IC25 >	3.3% Effluent	[Chronic]

Effluent Limitation for Biological Oxygen Demand (BOD) based upon Water Quality Standards or Regulations

In-stream criteria of downstream segments for Dissolved Oxygen will be met with an effluent BOD limitation as follows:

Season	Concentration	
Summer	20.0 mg/l as BOD5	667.1 lbs/day
Fall	25.0 mg/l as BOD5	833.8 lbs/day
Winter	25.0 mg/l as BOD5	833.8 lbs/day
Spring	25.0 mg/l as BOD6	833.8 lbs/day
Summer	16.0 mg/l as CBOD5	533.7 lbs/day
Spring	20.0 mg/l as CBOD5	667.1 lbs/day
Winter	20.0 mg/l as CBOD5	667.1 lbs/day
Spring	20.0 mg/l as CBOD6	667.1 lbs/day

Effluent Limitation for Dissolved Oxygen (DO) based upon Water Quality Standards

**Utah Division of Water Quality
Salt Lake City, Utah**

In-stream criteria of downstream segments for Dissolved Oxygen will be met with an effluent D.O. limitation as follows:

Season	Concentration
All Seasons	5.00

Effluent Limitation for Total Ammonia based upon Water Quality Standards

In-stream criteria of downstream segments for Total Ammonia will be met with an effluent limitation (expressed as Total Ammonia as N) as follows:

Season		Concentration	Load
Summer	4 Day Avg. - Chronic	15.0 mg/l as N	500.3 lbs/day
	1 Hour Avg. - Acute	169.0 mg/l as N	5,636.7 lbs/day
Fall	4 Day Avg. - Chronic	20.0 mg/l as N	667.1 lbs/day
	1 Hour Avg. - Acute	88.4 mg/l as N	2,948.4 lbs/day
Winter	4 Day Avg. - Chronic	15.0 mg/l as N	500.3 lbs/day
	1 Hour Avg. - Acute	76.0 mg/l as N	2,534.9 lbs/day
Spring	4 Day Avg. - Chronic	20.0 mg/l as N	667.1 lbs/day
	1 Hour Avg. - Acute	208.0 mg/l as N	6,937.5 lbs/day

Acute limit calculated with an Acute Zone of Initial Dilution (ZID) to be equal to 50.%.

Effluent Limitation for Total Residual Chlorine based upon Water Quality Standards

In-stream criteria of downstream segments for Total Residual Chlorine will be met with an effluent limitation as follows:

Season		Concentration	Load
Summer	4 Day Avg. - Chronic	0.324 mg/l	10.8 lbs/day
	1 Hour Avg. - Acute	0.306 mg/l	10.2 lbs/day
Fall/Spring	4 Day Avg. - Chronic	0.185 mg/l	6.2 lbs/day
	1 Hour Avg. - Acute	0.178 mg/l	5.9 lbs/day
Winter	4 Day Avg. - Chronic	0.171 mg/l	5.7 lbs/day
	1 Hour Avg. - Acute	0.166 mg/l	5.5 lbs/day

Effluent Limitations for Total Recoverable Metals based upon Water Quality Standards

In-stream criteria of downstream segments for Dissolved Metals will be met with an effluent limitation as follows (based upon a hardness of 300 mg/l):

**Utah Division of Water Quality
Salt Lake City, Utah**

	4 Day Average		Load	1 Hour Average		Load
	Concentration			Concentration		
Aluminum	N/A		N/A	12,052.4	ug/l	402.0 lbs/day
Arsenic	5,740.82	ug/l	123.8 lbs/day	5,790.5	ug/l	193.1 lbs/day
Cadmium	16.20	ug/l	0.3 lbs/day	103.8	ug/l	3.5 lbs/day
Chromium III	6,405.73	ug/l	138.1 lbs/day	71,450.4	ug/l	2383.1 lbs/day
Chromium VI	217.10	ug/l	4.7 lbs/day	197.8	ug/l	6.6 lbs/day
Copper	700.30	ug/l	15.1 lbs/day	623.2	ug/l	20.8 lbs/day
Iron	N/A		N/A lbs/day	16,099.1	ug/l	537.0 lbs/day
Lead	367.52	ug/l	7.9 lbs/day	5,316.6	ug/l	177.3 lbs/day
Mercury	0.3611	ug/l	0.0078 lbs/day	38.6816	ug/l	1.2902 lbs/day
Nickel	3,985.23	ug/l	85.9 lbs/day	19,143.2	ug/l	638.5 lbs/day
Selenium	92.91	ug/l	2.0 lbs/day	298.3	ug/l	10.0 lbs/day
Silver	N/A	ug/l	N/A lbs/day	403.6	ug/l	13.5 lbs/day
Zinc	9,218.30	ug/l	198.7 lbs/day	4,897.6	ug/l	163.4 lbs/day
Cyanide	157.76	ug/l	3.4 lbs/day	354.6	ug/l	11.8 lbs/day
TDS, mg/l	Utah Class 4 @ 1200 mg/l Standard			4,223.6	mg/l	70.4 tons/day
	Utah Class 4 @ 2000 mg/l Standard			29,212.3	mg/l	487.2 tons/day

[See Utah Water Quality Standards Table 2.14.1 Footnote (4)
and TMDL Studies for special provisions]

Salinity Form @ 723 mg/l Standard -10,675.9 mg/l -178.0 tons/day
 Salinity Forum @ 1 ton/day Standard 60.0 mg/l @ 1.0 ton/day
 [Salinity Forum "standards" apply only in the Colorado River Basin.
 See DWQ for further information and clarification.]

**Effluent Limitations for Heat/Temperature based upon
Water Quality Standards**

Summer	26.8 Deg. C.	80.3 Deg. F
Fall/Spring	18.4 Deg. C.	65.2 Deg. F
Winter	14.0 Deg. C.	57.2 Deg. F

**Effluent Limitations for Organics [Pesticides]
Based upon Water Quality Standards**

In-stream criteria of downstream segments for Organics [Pesticides]
will be met with an effluent limit as follows:

	4 Day Average		Load	1 Hour Average		Load
	Concentration			Concentration		
Aldrin				1.5E+00	ug/l	7.74E-02 lbs/day
Chlordane	4.30E-03	ug/l	1.43E-01 lbs/day	1.2E+00	ug/l	6.19E-02 lbs/day
DDT, DDE	1.00E-03	ug/l	3.34E-02 lbs/day	5.5E-01	ug/l	2.84E-02 lbs/day
Dieldrin	1.90E-03	ug/l	6.34E-02 lbs/day	1.3E+00	ug/l	6.45E-02 lbs/day

**Utah Division of Water Quality
Salt Lake City, Utah**

Endosulfan	5.60E-02 ug/l	1.87E+00 lbs/day	1.1E-01	ug/l	5.68E-03 lbs/day
Endrin	2.30E-03 ug/l	7.67E-02 lbs/day	9.0E-02	ug/l	4.64E-03 lbs/day
Guthion	0.00E+00 ug/l	0.00E+00 lbs/day	1.0E-02	ug/l	5.16E-04 lbs/day
Heptachlor	3.80E-03 ug/l	1.27E-01 lbs/day	2.6E-01	ug/l	1.34E-02 lbs/day
Lindane	8.00E-02 ug/l	2.67E+00 lbs/day	1.0E+00	ug/l	5.16E-02 lbs/day
Methoxychlor	0.00E+00 ug/l	0.00E+00 lbs/day	3.0E-02	ug/l	1.55E-03 lbs/day
Mirex	0.00E+00 ug/l	0.00E+00 lbs/day	1.0E-02	ug/l	5.16E-04 lbs/day
Parathion	0.00E+00 ug/l	0.00E+00 lbs/day	4.0E-02	ug/l	2.06E-03 lbs/day
PCB's	1.40E-02 ug/l	4.67E-01 lbs/day	2.0E+00	ug/l	1.03E-01 lbs/day
Pentachlorophenol	1.30E+01 ug/l	4.34E+02 lbs/day	2.0E+01	ug/l	1.03E+00 lbs/day
Toxephene	2.00E-04 ug/l	6.67E-03 lbs/day	7.3E-01	ug/l	3.77E-02 lbs/day

**Effluent Targets for Pollution Indicators
Based upon Water Quality Standards**

In-stream criteria of downstream segments for Pollution Indicators will be met with an effluent limit as follows:

	1 Hour Average	
	Concentration	Loading
Gross Beta (pCi/l)	50.0 pCi/L	
BOD (mg/l)	5.0 mg/l	166.8 lbs/day
Nitrates as N	4.0 mg/l	133.4 lbs/day
Total Phosphorus as P	0.05 mg/l	1.7 lbs/day
Total Suspended Solids	90.0 mg/l	3001.8 lbs/day

Note: Pollution indicator targets are for information purposes only.

**Effluent Limitations for Protection of Human Health [Toxics Rule]
Based upon Water Quality Standards (Most stringent of 1C or 3A & 3B as appropriate.)**

In-stream criteria of downstream segments for Protection of Human Health [Toxics] will be met with an effluent limit as follows:

	Maximum Concentration	
	Concentration	Load
Toxic Organics		
Acenaphthene	8.43E+04 ug/l	2.81E+03 lbs/day
Acrolein	2.44E+04 ug/l	8.13E+02 lbs/day
Acrylonitrile	2.06E+01 ug/l	6.88E-01 lbs/day
Benzene	2.22E+03 ug/l	7.40E+01 lbs/day
Benzidine	ug/l	lbs/day
Carbon tetrachloride	1.37E+02 ug/l	4.58E+00 lbs/day
Chlorobenzene	6.56E+05 ug/l	2.19E+04 lbs/day
1,2,4-Trichlorobenzene		
Hexachlorobenzene	2.41E-02 ug/l	8.02E-04 lbs/day
1,2-Dichloroethane	3.09E+03 ug/l	1.03E+02 lbs/day
1,1,1-Trichloroethane		
Hexachloroethane	2.78E+02 ug/l	9.27E+00 lbs/day

**Utah Division of Water Quality
Salt Lake City, Utah**

1,1-Dichloroethane		
1,1,2-Trichloroethane	1.31E+03 ug/l	4.38E+01 lbs/day
1,1,2,2-Tetrachloroethane	3.44E+02 ug/l	1.15E+01 lbs/day
Chloroethane		
Bis(2-chloroethyl) ether	4.37E+01 ug/l	1.46E+00 lbs/day
2-Chloroethyl vinyl ether		
2-Chloronaphthalene	1.34E+05 ug/l	4.48E+03 lbs/day
2,4,6-Trichlorophenol	2.03E+02 ug/l	6.77E+00 lbs/day
p-Chloro-m-cresol		
Chloroform (HM)	1.47E+04 ug/l	4.90E+02 lbs/day
2-Chlorophenol	1.25E+04 ug/l	4.17E+02 lbs/day
1,2-Dichlorobenzene	5.31E+05 ug/l	1.77E+04 lbs/day
1,3-Dichlorobenzene	8.12E+04 ug/l	2.71E+03 lbs/day
1,4-Dichlorobenzene	8.12E+04 ug/l	2.71E+03 lbs/day
3,3'-Dichlorobenzidine	2.41E+00 ug/l	8.02E-02 lbs/day
1,1-Dichloroethylene	1.00E+02 ug/l	3.33E+00 lbs/day
1,2-trans-Dichloroethylene1		
2,4-Dichlorophenol	2.47E+04 ug/l	8.23E+02 lbs/day
1,2-Dichloropropane	1.22E+03 ug/l	4.06E+01 lbs/day
1,3-Dichloropropylene	5.31E+04 ug/l	1.77E+03 lbs/day
2,4-Dimethylphenol	7.18E+04 ug/l	2.40E+03 lbs/day
2,4-Dinitrotoluene	2.84E+02 ug/l	9.48E+00 lbs/day
2,6-Dinitrotoluene		
1,2-Diphenylhydrazine	1.69E+01 ug/l	5.63E-01 lbs/day
Ethylbenzene	9.06E+05 ug/l	3.02E+04 lbs/day
Fluoranthene	1.16E+04 ug/l	3.85E+02 lbs/day
4-Chlorophenyl phenyl ether		
4-Bromophenyl phenyl ether		
Bis(2-chloroisopropyl) ether	5.31E+06 ug/l	1.77E+05 lbs/day
Bis(2-chloroethoxy) methane		
Methylene chloride (HM)	5.00E+04 ug/l	1.67E+03 lbs/day
Methyl chloride (HM)		
Methyl bromide (HM)		
Bromoform (HM)	1.12E+04 ug/l	3.75E+02 lbs/day
Dichlorobromomethane(HM)	6.87E+02 ug/l	2.29E+01 lbs/day
Chlorodibromomethane (HM)	1.06E+03 ug/l	3.54E+01 lbs/day
Hexachlorocyclopentadiene	5.31E+05 ug/l	1.77E+04 lbs/day
Isophorone	1.87E+04 ug/l	6.25E+02 lbs/day
Naphthalene		
Nitrobenzene	5.93E+04 ug/l	1.98E+03 lbs/day
2-Nitrophenol		
4-Nitrophenol		
2,4-Dinitrophenol	4.37E+05 ug/l	1.46E+04 lbs/day
4,6-Dinitro-o-cresol	2.39E+04 ug/l	7.97E+02 lbs/day
N-Nitrosodimethylamine	2.53E+02 ug/l	8.44E+00 lbs/day
N-Nitrosodiphenylamine	5.00E+02 ug/l	1.67E+01 lbs/day
N-Nitrosodi-n-propylamine	4.37E+01 ug/l	1.46E+00 lbs/day
Pentachlorophenol	2.56E+02 ug/l	8.54E+00 lbs/day
Phenol	1.44E+08 ug/l	4.79E+06 lbs/day
Bis(2-ethylhexyl)phthalate	1.84E+02 ug/l	6.15E+00 lbs/day
Butyl benzyl phthalate	1.62E+05 ug/l	5.42E+03 lbs/day

**Utah Division of Water Quality
Salt Lake City, Utah**

Di-n-butyl phthalate	3.75E+05 ug/l	1.25E+04 lbs/day
Di-n-octyl phthalate		
Diethyl phthalate	3.75E+06 ug/l	1.25E+05 lbs/day
Dimethyl phthalate	9.06E+07 ug/l	3.02E+06 lbs/day
Benzo(a)anthracene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Benzo(a)pyrene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Benzo(b)fluoranthene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Benzo(k)fluoranthene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Chrysene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Acenaphthylene (PAH)		
Anthracene (PAH)		
Dibenzo(a,h)anthracene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Indeno(1,2,3-cd)pyrene (PAH)	9.68E-01 ug/l	3.23E-02 lbs/day
Pyrene (PAH)	3.44E+05 ug/l	1.15E+04 lbs/day
Tetrachloroethylene	2.78E+02 ug/l	9.27E+00 lbs/day
Toluene	6.25E+06 ug/l	2.08E+05 lbs/day
Trichloroethylene	2.53E+03 ug/l	8.44E+01 lbs/day
Vinyl chloride	1.64E+04 ug/l	5.47E+02 lbs/day

Pesticides

Aldrin	4.37E-03 ug/l	1.46E-04 lbs/day
Dieldrin	4.37E-03 ug/l	1.46E-04 lbs/day
Chlordane	1.84E-02 ug/l	6.15E-04 lbs/day
4,4'-DDT	1.84E-02 ug/l	6.15E-04 lbs/day
4,4'-DDE	1.84E-02 ug/l	6.15E-04 lbs/day
4,4'-DDD	2.62E-02 ug/l	8.75E-04 lbs/day
alpha-Endosulfan	6.25E+01 ug/l	2.08E+00 lbs/day
beta-Endosulfan	6.25E+01 ug/l	2.08E+00 lbs/day
Endosulfan sulfate	6.25E+01 ug/l	2.08E+00 lbs/day
Endrin	2.53E+01 ug/l	8.44E-01 lbs/day
Endrin aldehyde	2.53E+01 ug/l	8.44E-01 lbs/day
Heptachlor	6.56E-03 ug/l	2.19E-04 lbs/day
Heptachlor epoxide		

PCB's

PCB 1242 (Arochlor 1242)	1.41E-03 ug/l	4.69E-05 lbs/day
PCB-1254 (Arochlor 1254)	1.41E-03 ug/l	4.69E-05 lbs/day
PCB-1221 (Arochlor 1221)	1.41E-03 ug/l	4.69E-05 lbs/day
PCB-1232 (Arochlor 1232)	1.41E-03 ug/l	4.69E-05 lbs/day
PCB-1248 (Arochlor 1248)	1.41E-03 ug/l	4.69E-05 lbs/day
PCB-1260 (Arochlor 1260)	1.41E-03 ug/l	4.69E-05 lbs/day
PCB-1016 (Arochlor 1016)	1.41E-03 ug/l	4.69E-05 lbs/day

Pesticide

Toxaphene	2.34E-02 ug/l	7.81E-04 lbs/day
-----------	---------------	------------------

Metals

Antimony	ug/l	lbs/day
Arsenic	ug/l	lbs/day
Asbestos	ug/l	lbs/day
Beryllium		

**Utah Division of Water Quality
Salt Lake City, Utah**

Cadmium		
Chromium (III)		
Chromium (VI)		
Copper	ug/l	lbs/day
Cyanide	ug/l	lbs/day
Lead		
Mercury	ug/l	lbs/day
Nickel	ug/l	lbs/day
Selenium		
Silver		
Thallium	ug/l	lbs/day
Zinc		
Dioxin		
Dioxin (2,3,7,8-TCDD)	4.37E-07 ug/l	1.46E-08 lbs/day

**Metals Effluent Limitations for Protection of All Beneficial Uses
Based upon Water Quality Standards and Toxics Rule**

	Acute						
	Class 4	Class 3	Toxics				Class 3
	Acute	Acute	Drinking	Acute	1C Acute	Acute	Chronic
	Agricultur	Aquatic	Water	Toxics	Health	Most	Aquatic
	al	Wildlife	Source	Wildlife	Criteria	Stringent	Wildlife
	ug/l	ug/l	ug/l	ug/l	ug/l	ug/l	ug/l
Aluminum		12052.4				12052.4	N/A
Antimony				134314.5		134314.5	
Arsenic	3123.6	5790.5			0.0	3123.6	5740.8
Asbestos						0.00E+00	
Barium						0.0	
Beryllium						0.0	
Cadmium	310.0	103.8			0.0	103.8	16.2
Chromium (III)		71450.4			0.0	71450.4	6405.7
Chromium (VI)	3099.6	197.8			0.0	197.79	217.10
Copper	6223.2	623.2				623.2	700.3
Cyanide		354.6	6871906.9			354.6	157.8
Iron		16099.1				16099.1	
Lead	3099.6	5316.6			0.0	3099.6	367.5
Mercury		38.68		4.69	0.0	4.69	0.361
Nickel		19143.2		143685.3		19143.2	3985.2
Selenium	1513.7	298.3			0.0	298.3	92.9
Silver		403.6			0.0	403.6	
Thallium				196.8		196.8	
Zinc		4897.6				4897.6	9218.3
Boron	23427.0					23427.0	

Summary Effluent Limitations for Metals [Wasteload Allocation, TMDL]

[If Acute is more stringent than Chronic, then the Chronic takes on the Acute value.]

**Utah Division of Water Quality
Salt Lake City, Utah**

	WLA Acute ug/l	WLA Chronic ug/l	
Aluminum	12052.4	N/A	
Antimony	134314.54		
Arsenic	3123.6	5740.8	Acute Controls
Asbestos	0.00E+00		
Barium			
Beryllium			
Cadmium	103.8	16.2	
Chromium (III)	71450.4	6406	
Chromium (VI)	197.8	217.1	Acute Controls
Copper	623.2	700.3	Acute Controls
Cyanide	354.6	157.8	
Iron	16099.1		
Lead	3099.6	367.5	
Mercury	4.685	0.361	
Nickel	19143.2	3985	
Selenium	298.3	92.9	
Silver	403.6	N/A	
Thallium	196.8		
Zinc	4897.6	9218.3	Acute Controls
Boron	23426.96		

Other Effluent Limitations are based upon R317-1.

X. Antidegradation Considerations

The Utah Antidegradation Policy allows for degradation of existing quality where it is determined that such lowering of water quality is necessary to accommodate important economic or social development in the area in which the waters are protected [R317-2-3]. It has been determined that certain chemical parameters introduced by this discharge will cause an increase of the concentration of said parameters in the receiving waters. Under no conditions will the increase in concentration be allowed to interfere with existing instream water uses.

The antidegradation rules and procedures allow for modification of effluent limits less than those based strictly upon mass balance equations utilizing 100% of the assimilative capacity of the receiving water. Additional factors include considerations for "Blue-ribbon" fisheries, special recreational areas, threatened and endangered species, and drinking water sources.

XI. Colorado River Salinity Forum Considerations

Discharges in the Colorado River Basin are required to have their discharge at a TDS loading of less than 1.00 tons/day unless certain exemptions apply. Refer to the Forum's Guidelines for additional information allowing for an exceedence of this value.

XII. Summary Comments

The mathematical modeling and best professional judgement indicate that violations of receiving

**Utah Division of Water Quality
Salt Lake City, Utah**

water beneficial uses with their associated water quality standards, including important downstream segments, will not occur for the evaluated parameters of concern as discussed above if the effluent limitations indicated above are met.

XIII. Notice of UPDES Requirement

This Addendum to the Statement of Basis does not authorize any entity or party to discharge to the waters of the State of Utah. That authority is granted through a UPDES permit issued by the Utah Division of Water Quality. The numbers presented here may be changed as a function of other factors. Dischargers are strongly urged to contact the Permits Section for further information. Permit writers may utilize other information to adjust these limits and/or to determine other limits based upon best available technology and other considerations provided that the values in this wasteload analysis [TMDL] are not compromised. See special provisions in Utah Water Quality Standards for adjustments in the Total Dissolved Solids values based upon background concentration.

XIV. Special Considerations

None

Prepared by:
William O. Moellmer, Ph.D.
Utah Division of Water Quality
801-538-6329

File Name: South Valley November 10, 2004